

**03992 - Magnetic Quid relay module with sequential ON/OFF pulses, 1 input for NO push button, 1 input for reset push button, 1x10 AX relay output, 220-240 V~ 50/60 Hz power supply, light signal for the load status on each individual push button, installation in junction boxes or connector block boxes.**

The device, which can be installed in connector block boxes and placed underneath the blank module or inside the junction boxes declared as suitable for electrical devices that dissipate energy, turns a load on or off following a signal received from a push button. It is also fitted with an input for the control unit switch-off control (reset). If the signalling unit is installed in the ON/OFF or reset control push button, the device sends a signal about the status of the load.

**00945.G, 00932 - Load status LED signalling unit, green.**

The signalling unit is installed in the back of the push buttons associated with relay 03992 and signals the status of the load both for the control push button and for the reset push button. Art. 00945.G is dedicated to the Linea series.

**CHARACTERISTICS.**

- Rated supply voltage: 220 – 240 V~ 50/60 Hz.
- ON/OFF control via NO push buttons.
- Relay output (1, L) for lights control 10 AX 220-240 V 50/60 Hz
- Max. 1 switching per second.
- Reset control via NO push button. An unlimited number of art. 03992 (with or without signalling unit) can be connected to the same Reset push button.
- Art. 00932 for signalling the load status can be installed on the control and reset push button.
- An unlimited number of ON/OFF control push buttons can be connected to each module 03992. Up to a maximum of 4 ON/OFF control push buttons with junction box pilot lamp can be connected. This lamp will only light up when the load is ON.
- Up to a maximum of 2 Reset push buttons with junction box pilot lamp can be connected to each module 03992 (for instance, with 2 modules 03992 connected to the same Reset push buttons, 4 Reset push buttons with junction box pilot lamp can be connected). The junction box pilot lamp will light up if one of the relays has the load ON.
- On the ON/OFF control push button and on the reset push button we recommend you use buttons art. 31000A.L-31000.L-31000A.D-31000.D if you are using signalling unit 00945.G or buttons 20026-19026-14026-20021.L-19021.L-14021.L if you are using unit 00932.
- In the event that several modules 03992 are connected together using the reset push button, the system must be set up with a single Hysteresis and/or RCBO circuit breaker.
- It should be used in dry, dust-free places at a temperature of between 0 °C and +35 °C.
- Dissipated power: 1.5 W with load ON and max. current 10 A  
0 W and no absorption with load OFF
- **Art. 00945.G-00932:**
  - Rated supply voltage: 220 – 240 V~ 50/60 Hz.
  - The signalling unit can be installed on the ON/OFF and reset control push button.
  - The signalling unit can also be installed on controls that are not associated with module 03992.
  - It should be used in dry, dust-free places at a temperature of between 0 °C and +35 °C.

**SUPPLEMENTARY DECLARATION MADE BY THE MANUFACTURER.**

- **Relay output (220- 240 V~ controllable loads):**
  - rated load in AC1: 10 A (6,000 cycles);
  - rated load in AC15: 2.2 A (5,000 cycles);
  - resistive loads : 10 A (20,000 cycles);
  - incandescent lamps : 3 A (20,000 cycles);
  - fluorescent lamps : 100 W (20,000 cycles);
  - energy saving lamps : 100 W (20,000 cycles);
  - LED lamps : 100 W (20,000 cycles);
  - electronic transformers : 2 A (20,000 cycles);
  - power supply units for LED strips: 200 W (20,000 cycles).

**INSTALLATION RULES.**

- Installation must be carried out by qualified persons in compliance with the current regulations regarding the installation of electrical equipment in the country where the products are installed.
- The electronic switch shall be protected by a directly associated fuse with a rated breaking capacity of 1500 A or circuit breaker with a rated current not exceeding 10 A.
- Since these are retrofit devices, art. 03992 must always be installed in protected boxes.

**REGULATORY COMPLIANCE.**


LV Directive. EMC directive. EN IEC 60669-2-1 standard.

REACH (EU) Regulation no. 1907/2006 – Art.33. The product may contain traces of lead.





**WEEE - User information**

The crossed out bin symbol indicates that the product must be sent to separate collection facilities for recovery and recycling, in compliance with the national laws of EU Countries that implement the WEEE Directive. The objective is to prevent any harmful effects on the environment and on human health by ensuring that products are disposed of correctly, avoiding illegal disposal sanctioned by law. To dispose of the product correctly, please check local dispositions in your country.

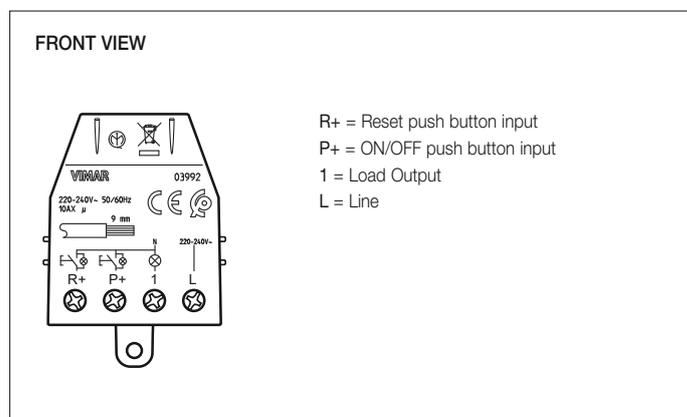


### 03992 CONNECTIONS WITH 00945.G or 00932 UNIT

If unit 00945.G or 00932 is inserted into the ON/OFF control push button or the Reset push button of relay 03992, the status of the load is displayed on the individual push button; if the unit is on, the load is powered, whereas if it is off the load is not powered. The terminals of the push buttons are polarised so the installer must take care to identify the P+/R+ terminal and the Neutral terminal as illustrated in the figure (inverted wiring will result in malfunctioning).

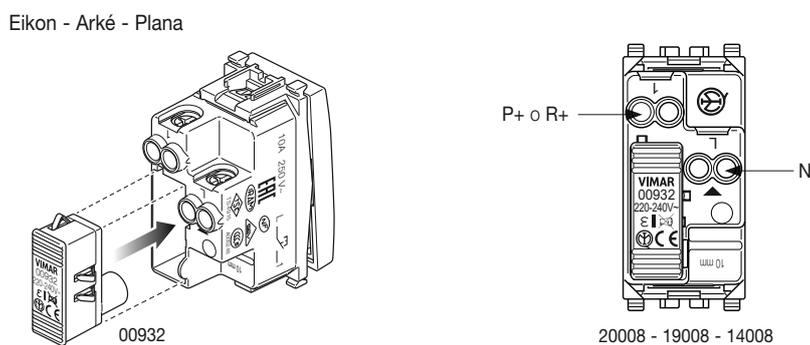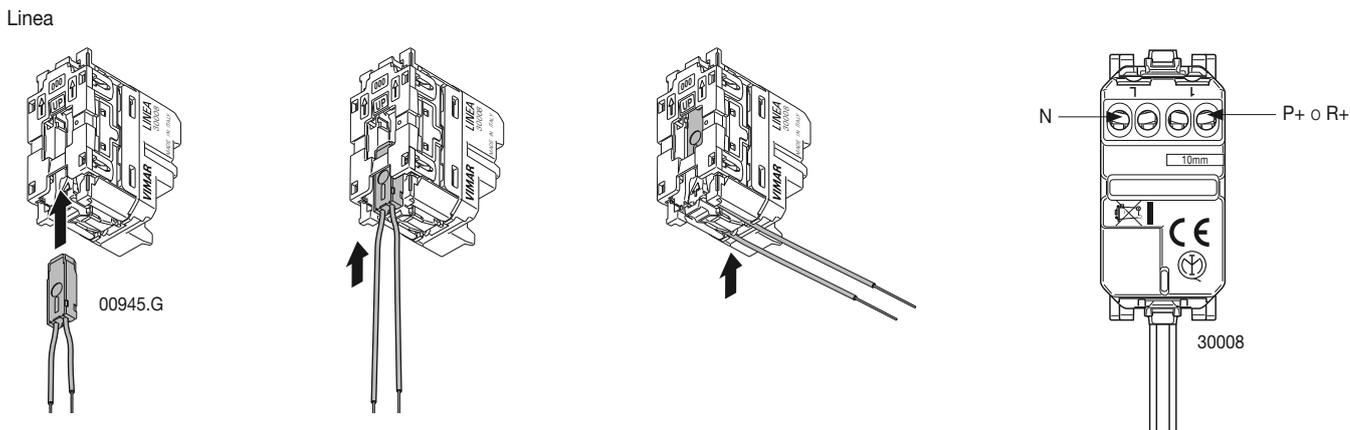

### CONNECTIONS

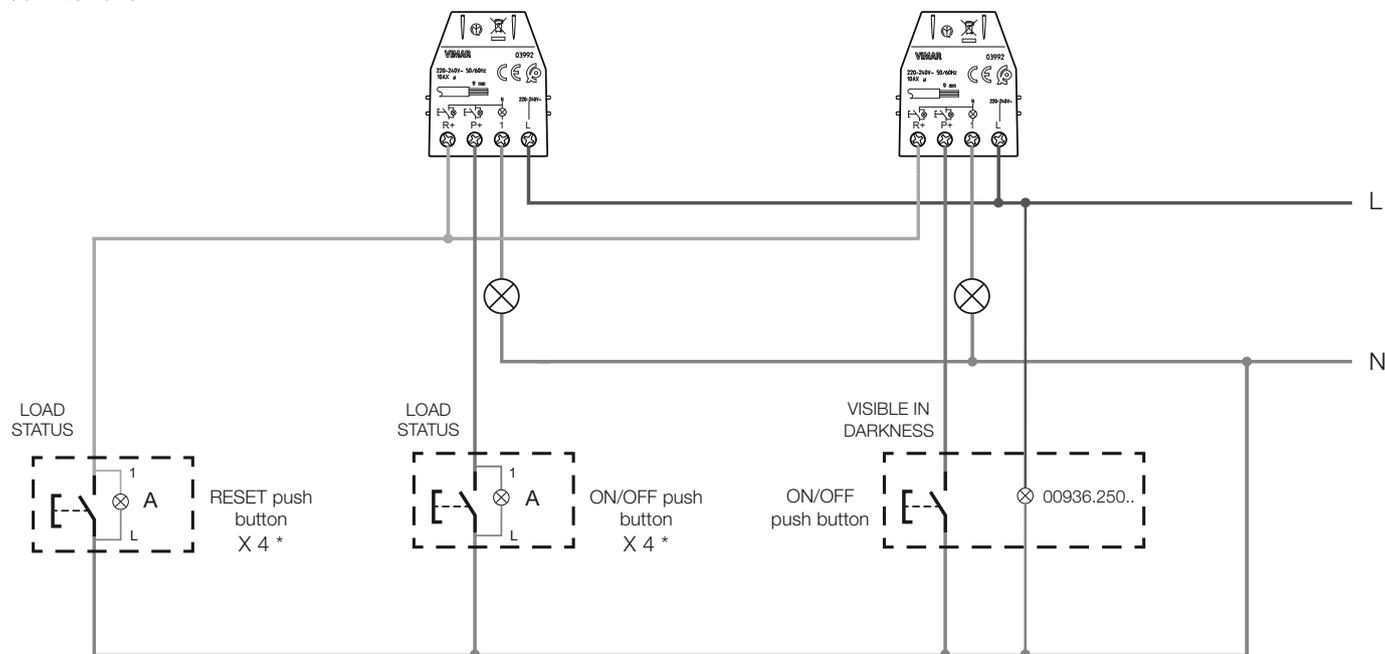

A: Art. 00932 or 00945.G

\* Only in the presence of signalling unit 00932. If this is not the case, an unlimited number of push buttons can be connected. Use only the signalling unit 00932 as other indicator lights could damage the device. For the visible in darkness function connect the indicator light (art.00936.250..) to phase and neutral.