

32602.x - 32603.x - 32604.x - 32613.x - 32614.x

32602.x: Electrified mounting frame with 2 flush mounting modules, 3 XT front modules, for mounting boxes ø 60 mm.

32603.x: Electrified mounting frame with 3 flush mounting modules, 4 XT front modules, with screws, for 3-module mounting boxes.

32604.x: Electrified mounting frame with 4 flush mounting modules, 5 XT front modules, with screws, for 4-module mounting boxes.

32613.x: Mixed electrified decorative mounting frame for 1 XT node, 1 XT front module, 1 or 2 Linea connector blocks up to 2 modules, with screws, for 3-module mounting boxes, complete with cover plate.

32614.x: Mixed electrified decorative mounting frame for 1 XT node and 1 XT actuator, 2 XT front modules, 1 or 2 Linea connector blocks up to 2 modules, with screws, for 4-module mounting boxes, complete with cover plate.

The electrified mounting frames allow the installation of XT platform devices (nodes, actuators, controls and thermostat) and the distribution of the power supply to the same.

Using art. 32602.x, 32603.x and 32604.x you can create lighting devices comprising devices from the XT platform only whereas art. 32613.x and 32614.x make it possible to create mixed lighting devices which comprise both XT devices and conventional devices from the Linea series (current socket outlets, USB power supply units).

CHARACTERISTICS.

- Art 32602.x: max 2 flush mounting 1-module devices and 3-module front devices can be installed in total.
- Art 32603.x: for max 3 flush mounting 1-module devices and 4-module front devices can be installed in total.
- Art 32604.x: for max 4 flush mounting 1-module devices and 5-module front devices can be installed in total.
- Art 32613.x: for max 1 flush mounting power supply node, one 1-module front device can be installed in total and traditional devices from the Linea series.
- Art 32614.x: for max 2 flush mounting 1-module devices, 2-module front devices can be installed in total and traditional devices from the Linea series.
- Operating temperature: -5 °C ÷ +45 °C (indoor use)
- Protection degree: IP20

INSTALLATION RULES.

- Installation must be carried out by qualified persons in compliance with the current regulations regarding the installation of electrical equipment in the country where the products are installed.
- The 2-module cover plate supplied should only be used with articles 32613.x and 32614.x.
- The mounting frames must be installed while observing the direction of installation specified by the word UP on the front of the device.
- Uneven walls or excess tightening of the mounting frame screws could lead to imperfect button alignment.
- Device susceptible to electrostatic discharges; take precautions when handling.
- Mounting frame 32602.x features a spacer that must be removed in the event of installation in mounting boxes for hollow walls.
- Only open the flaps opposite the nodes and/or actuators you intend to install.
- The protective film on the mounting frame must be removed before hooking on the controls.
- Complete the styling part not used by controls with fixed buttons 32020.x.
- Install the mounting frame only once all masonry work and painting has been completed.

REGULATORY COMPLIANCE.

LV Directive. EMC directive.


Standards IEC 60669-2-1, EN 50491-2, EN IEC 63044.

REACH (EU) Regulation no. 1907/2006 – Art.33. The product may contain traces of lead.


WEEE - User information
 The crossed bin symbol on the appliance or on its packaging indicates that the product at the end of its life must be collected separately from other waste. The user must therefore hand the equipment at the end of its life cycle over to the appropriate municipal centres for the differentiated collection of electrical and electronic waste. As an alternative to independent management, you can deliver the equipment you want to dispose of free of charge to the distributor when purchasing a new appliance of an equivalent type. You can also deliver electronic products to be disposed of that are smaller than 25 cm for free, with no obligation to purchase, to electronics distributors with a sales area of at least 400 m². Proper sorted waste collection for subsequent recycling, processing and environmentally conscious disposal of the old equipment helps to prevent any possible negative impact on the environment and human health while promoting the practice of reusing and/or recycling materials used in manufacture.

FRONT AND BACK VIEW


Art. 32602.x (for 2-module mounting box)

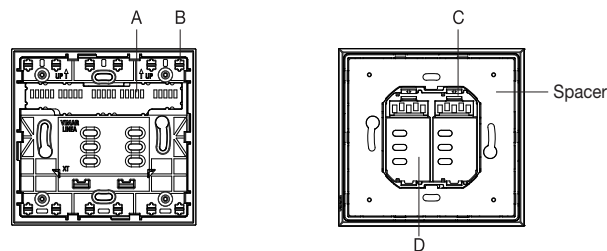


Art. 32603.x (for rectangular 3-module mounting box)

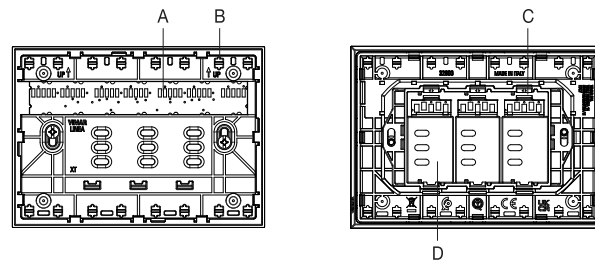


Art. 32604.x (for rectangular 4-module mounting box)

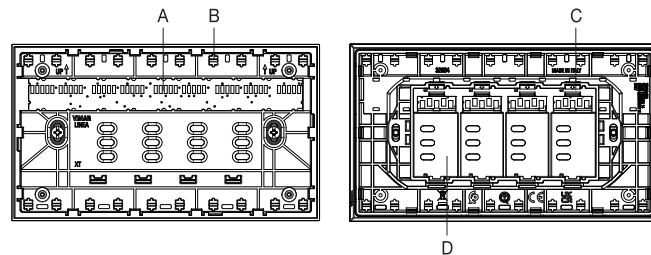

Art. 32613.x (for rectangular 3-module mounting box)

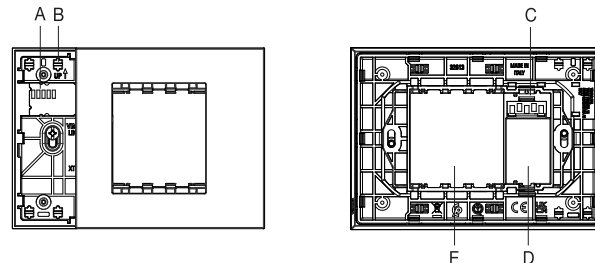

Art. 32614.x (for rectangular 4-module mounting box)

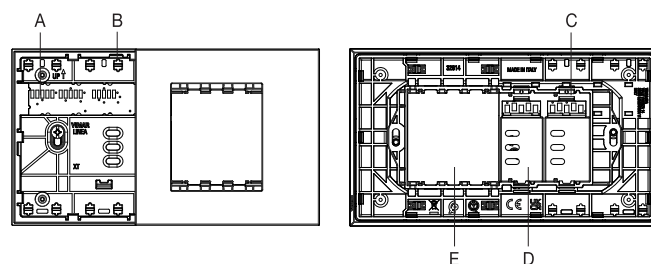

A: Contacts for XT controls (art. 32021.x-32023.x-32024.x-32041.x-32044.x-32031.Px - 32033.Px - 32034.Px)


B: Slots for hooking XT controls (art. 32021.x-32023.x-32024.x-32041.x-32044.x-32031.Px - 32033.Px - 32034.Px)

C: Protection flap


D: Seat for hooking from the back of the XT devices (art. 32001, 32002)

E: Seat for hooking from the front of traditional Linea devices

EXAMPLE OF INSTALLATION WITH ART. 32604.x

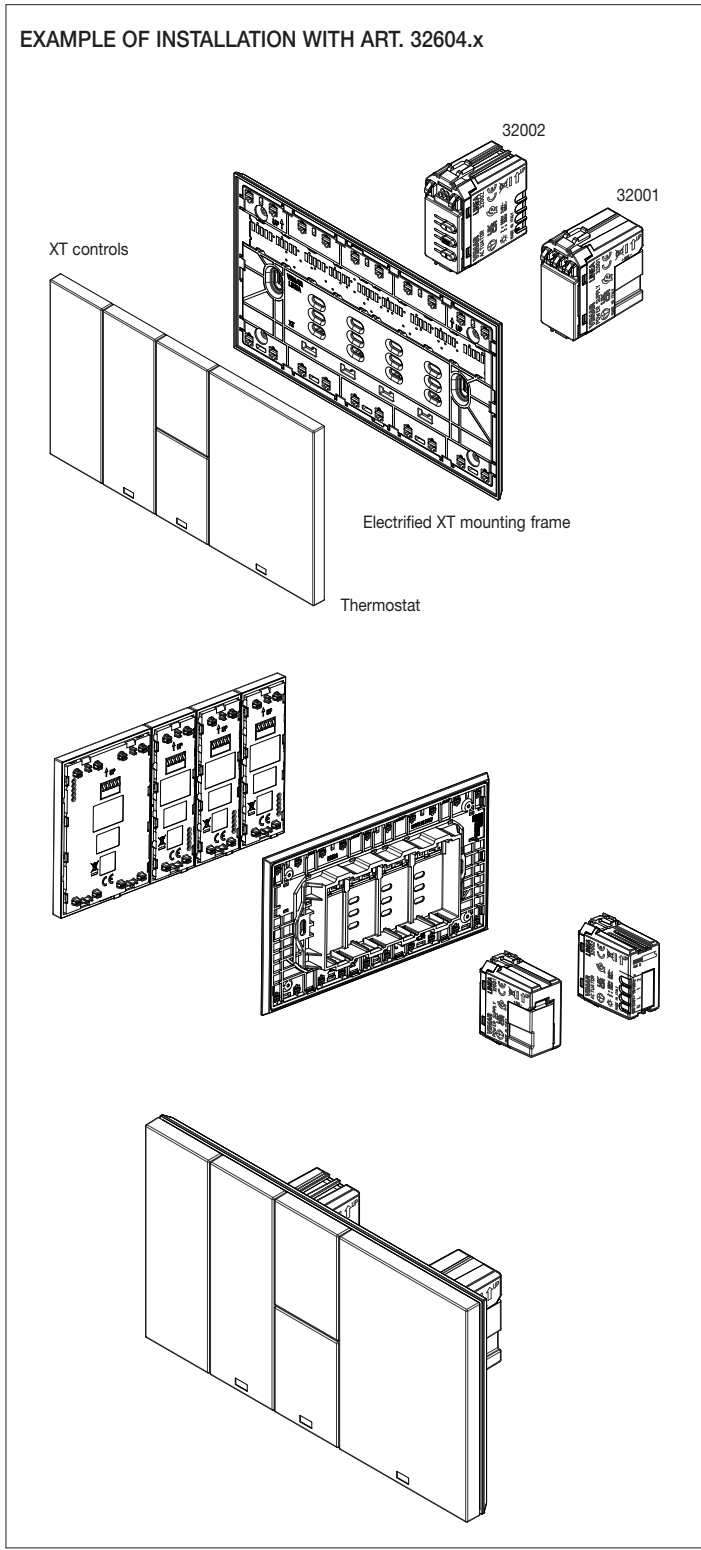

EXAMPLE OF INSTALLATION WITH ART. 32614.x

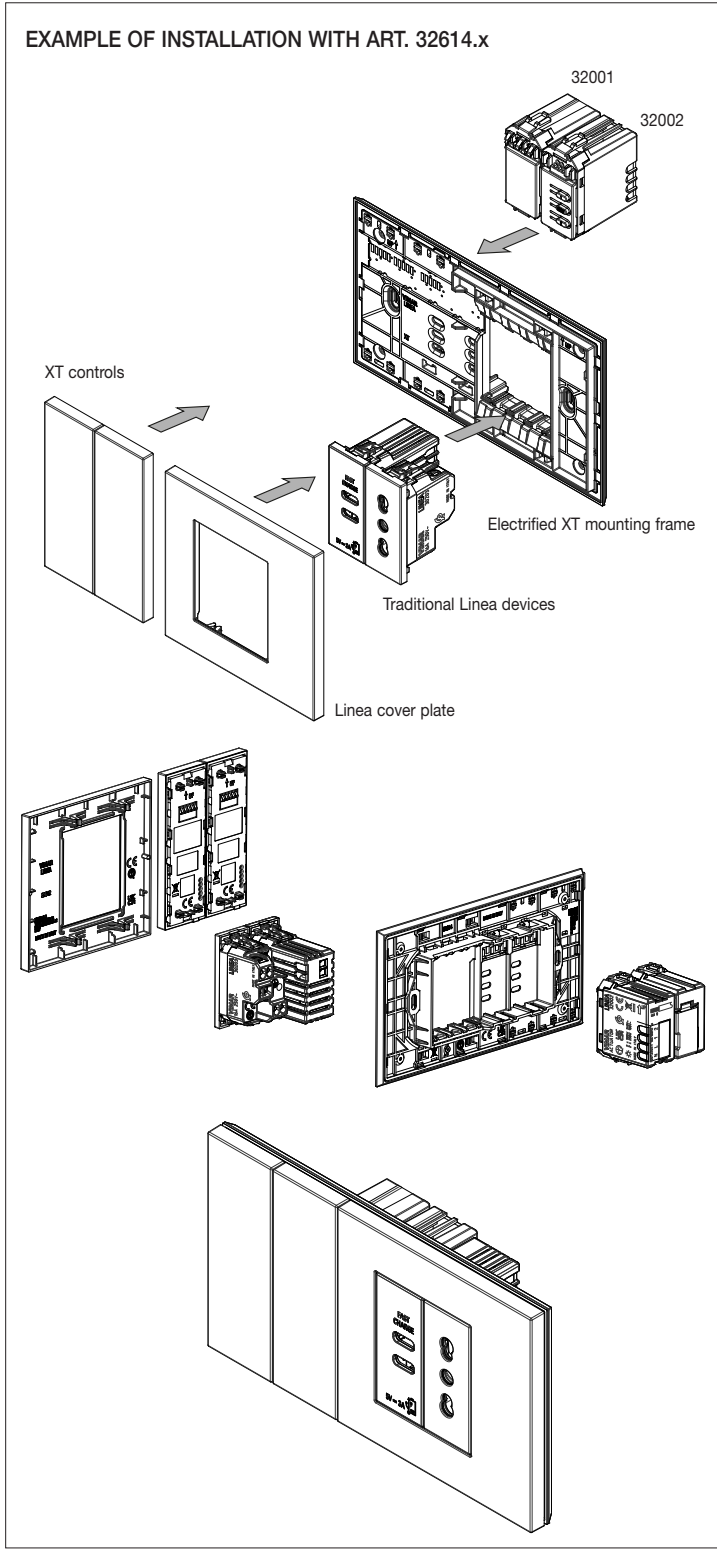

FLAP OPENING

