




Shared components: 6-button KNX control+shutter-laths 3M

01587

Smart systems&products / KNX / Shared components / Devices

6-button KNX control+shutter-laths 3M

6-button home automation device and actuator for 1 rolling shutter and laths otientation with change-over relay output for $\cos\phi$ 0,6 2 A 120-240 V~ 50/60 Hz motor, KNX standard, RGB LED location in darkness with brightness control, to be completed with interchangeable 1- or 2-module Eikon, Arké or Plana half-buttons - 2 modules

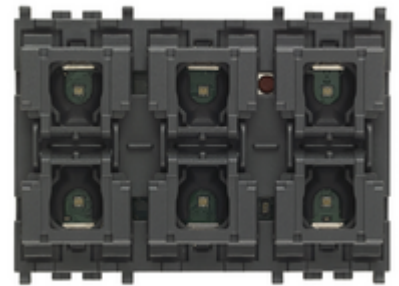

Product Status

3 - Active

Minimum order quantity

1 NR

Sheets, Manuals, Documentation

- [Light Multilanguage instructions sheet \(632 kb\)](#)
- [Full Multilanguage instructions sheet \(724 kb\)](#)
- [Manuale installatore \(2899 kb\)](#)
- [Installer manual \(1937 kb\)](#)


Product Software

- [DB_ComandoSupervisione_KNX_REL-01.17_20230117.zip](#)


Video

- [Universal home automation controls](#)


Drawings



Space view



Backside view



3D View

Technical data

- **Class group:** Installation bus systems
- **Class:** Multi operating device for bus system
- **Bus system KNX-RF (Radio Frequent):** No
- **Bus system radio frequent:** No
- **Bus system LON:** No
- **Bus system Powernet:** No
- **Radio frequent bidirectional:** No
- **Width in number of modular spacings:** 3
- **Material:** Plastic
- **Material quality:** Thermoplastic
- **Surface protection:** Untreated
- **Surface finishing:** Matt
- **Colour:** Other
- **RAL-number (similar):** 7024
- **Transparent:** No
- **With bus connection:** Yes

Certifications

- 00. CE Marking - EU
- 27. KNX ([download](#))
- 37. Marking - Morocco
- 43. UKCA mark - Great Britain
- 92. RoHS UAE
- 99. WEEE Directive ([download](#))

Packaging



8 007352 593626

Code 8007352593626
Quantity 1 NR
Dim. 5.7x5.3x7.7 [cm]
Weight 77.8 [g]



8 007352 633261

Code 8007352633261
Quantity 70 NR
Dim. 39.5x30x17 [cm]
Weight 6,286 [g]

Legal

Vimar reserves the right to change at any time and without notice the characteristics of the products reported. Installation should be carried out by qualified staff in compliance with the current regulations regarding the installation of electrical equipment in the country where the products are installed. For the terms of use of the information on the product info sheet see [Conditions of Use](#).