



## ARKÉ: TV-RD-SAT through-line.out.2outs Metal

### 19302.10.M

Wiring devices / Traditional wiring devices / ARKÉ / Devices

### TV-RD-SAT through-line.out.2outs Metal

Coaxial TV-RD-SAT 5-2400 MHz socket outlet, through-line, demix, 2 outputs with male (TV-RD) and female F-type (SAT) connectors, connection attenuation 10 dB, grey - 2 modules

### Product Status

3 - Active

### Minimum order quantity

10 NR


### Sheets, Manuals, Documentation

- [Multilanguage instructions sheet \(905 kb\)](#)


### Video

- [Arké lives in your time](#)


### Drawings




Space view



Backside view



3D View

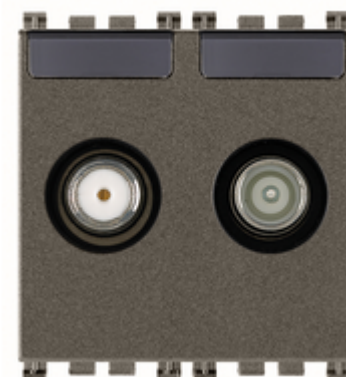

## Technical data

- **Class group:** Antenna and satellite technique
- **Class:** Antenna socket box
- **Model:** Loop-through socket
- **Cover:** None
- **Tap loss at 860 MHz:** 11,20 dB
- **Tap loss at 2150 MHz:** 12,00 dB
- **Number of outlets:** 2
- **Suitable for remote power supply:** No
- **Type of fastening:** Snap mounting (engagement)
- **Colour:** Aluminium
- **RAL-number (similar):** 9007
- **Surface protection:** Lacquered
- **Material:** Plastic

## Certifications


- 00. CE Marking - EU
- 10. EAC Eurasian Customs Union
- 37. Marking - Morocco
- 43. UKCA mark - Great Britain
- 96. Electrotechnical expert ([download](#))
- 99. WEEE Directive ([download](#))

## Packaging



8 007352 601390

**Code** 8007352601390  
**Quantity** 1 NR  
**Dim.** 5.1x4.3x5.3 [cm]  
**Weight** 79.2 [g]



8 007352 604216

**Code** 8007352604216  
**Quantity** 10 NR  
**Dim.** 26.9x11.6x4.9 [cm]  
**Weight** 855.7 [g]

## Legal

Vimar reserves the right to change at any time and without notice the characteristics of the products reported. Installation should be carried out by qualified staff in compliance with the current regulations regarding the installation of electrical equipment in the country where the products are installed. For the terms of use of the information on the product info sheet see [Conditions of Use](#).