




Shared components: MASTER dimmer 230V 1000W/VA

01861

Smart systems&products / By-me Plus / Shared components / DIN devices

MASTER dimmer 230V 1000W/VA




Dimmer, 230 V~ 50/60 Hz for: 40-1000 W incandescent lamps, 40-1000 VA ferromagnetic transformers, MASTER function for 01862, protection fuse, MOSFET+TRIAC technology, for DIN (60715 TH35) rail installation, occupies 4 17,5 mm modules

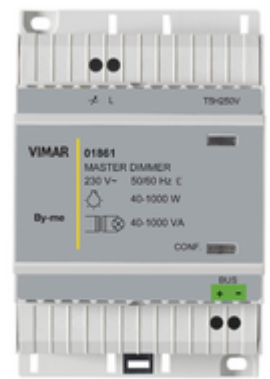

2 - Will be discontinued

1 NR

- [FI - Foglio istruzioni ZIS_49400253A0 \(289 kb\)](#)



3D

- **Class group:** Installation bus systems
- **Class:** Dimming actuator for bus system
- **Bus system KNX:** No
- **Bus system KNX-RF (Radio Frequent):** No
- **Bus system radio frequent:** No
- **Bus system LON:** No
- **Bus system Powernet:** No
- **Other bus systems:** Other
- **Radio frequent bidirectional:** No
- **Model:** Dimming actuator
- **Mounting method:** Other
- **Width in number of modular spacings:** 4

- **With bus connection:** Yes
- **Bus module detachable:** No
- **Local operation/hand operation:** No
- **With LED indication:** Yes
- **Number of outputs:** 1
- **Output power:** 40 - 1.000 W
- **Power boost suitable:** No
- **Type of load:** Universal
- **Voltage:** 230,00 - 230,01 V
- **Parallel-service possible:** No
- **Frequency:** 50,00 - 60,00 HZ
- **Degree of protection (IP):** IP20

- 00. CE Marking - EU
- 43. UKCA mark - Great Britain

- 99. WEEE Directive ([download](#))



8007352387423
 1 NR
 11.7x10.8x7.1 [cm]
 206.4 [g]

Vimar