



Shared components: IoT dial thermostat 2M white

02973.B

Wiring devices / View Wireless wiring devices / Shared components / Devices

IoT dial thermostat 2M white

Dial thermostat with relay output 5(2) A 240 V~, IoT technology on Bluetooth technology 5.0 standard for the creation of View Wireless mesh system, 1 input for external temperature sensor, 100-240 V~ 50/60 Hz power supply, heating and air conditioning in ON/OFF and PID mode, class I temperature control device (contribution 1%) in ON/OFF mode, class IV (contribution 2%) in PID mode, white LED backlighting with brightness control, 100-240 V 50/60 Hz power supply, white - 2 modules. To be completed with Eikon, Arké and Plana cover plates, for Idea with dedicated mounting frame 16723

- Compatible with Alexa, Google Home and IFTTT, using the dedicated gateway
- Configuration via "VIEW Wireless" App for Bluetooth technology system
- Hotkeys are designed for quick interaction



Product Status

3 - Active

Minimum order quantity

1 NR


Sheets, Manuals, Documentation

- [Light multilanguage instructions sheet \(1051 kb\)](#)
- [Foglio istruzioni multilingua Full \(696 kb\)](#)
- [Feuille d'instructions multilingues Full \(700 kb\)](#)
- [Hoja de instrucciones multilingüe Full \(697 kb\)](#)
- [Full multilanguage instructions sheet \(692 kb\)](#)
- [Πολυγλωσσικό φύλλο οδηγιών Full \(860 kb\)](#)
- [Mehrsprachig-Gebrauchsinformation Full \(699 kb\)](#)
- [Full \(829 kb\)](#)
- [Manuale app View Wireless \(15556 kb\)](#)
- [Manuel appli View Wireless \(37703 kb\)](#)
- [Manual app View Wireless \(37528 kb\)](#)
- [Manual View Wireless app \(37579 kb\)](#)
- [Εγχειρίδιο τεχνικού εγκατάστασης \(37781 kb\)](#)
- [Installationsanleitung View Wireless \(37508 kb\)](#)

Video

- [App View Wireless - temperature control](#)

Gallery

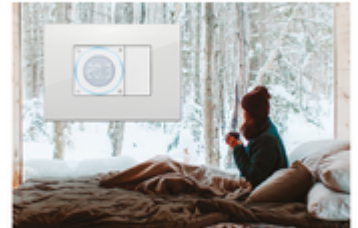

Technical data

- **Class group:** Stats, switches and controllers
- **Class:** Room thermostat
- **Model:** On/Off
- **Type of power supply:** 230 V AC
- **Connection:** 3-/4-wire
- **With receiver:** No
- **External sensor:** Yes
- **Thermal feedback:** Parallel
- **Control characteristic:** PID
- **Suitable for heating:** Yes
- **Number of heater outputs:** 1
- **Number of cooler outputs:** 1
- **Differential value:** 0,00 - 1,00 k
- **Adjustable differential:** Yes
- **Temperature readable:** Yes
- **With sound indicator:** No
- **Sensor/feeler type:** Resistance sensor
- **Mounting method:** Flush-mounted
- **Number of modules (module system):** 2
- **With display:** Yes
- **Operation:** Turn
- **With tap water circuit:** No
- **Max. contact voltage:** 230 V
- **Max. contact load:** 5 A
- **Degree of protection (IP):** IP30
- **Explosion-proof:** No
- **Colour:** White
- **RAL-number:** 1013
- **Height:** 49,00 mm
- **Width:** 44,80 mm
- **Depth:** 41,50 mm
- **Diameter:** 0 mm
- **Class of the temperature control:** IV

Certifications

- 00. CE Marking - EU
- 37. Marking - Morocco
- 40. Bluetooth technology
- 43. UKCA mark - Great Britain
- 92. RoHS UAE
- 99. WEEE Directive ([download](#))

Packaging



Code 8007352657540
Quantity 1 NR
Dim. 5.7x5.3x7.7 [cm]
Weight 81.6 [g]



Code 8007352746473
Quantity 60 NR
Dim. 37.5x30x13.5 [cm]
Weight 5,212.2 [g]



Code 8007352657557
Quantity 70 NR
Dim. 39.5x30x17 [cm]
Weight 6,078 [g]

Legal

Vimar reserves the right to change at any time and without notice the characteristics of the products reported. Installation should be carried out by qualified staff in compliance with the current regulations regarding the installation of electrical equipment in the country where the products are installed. For the terms of use of the information on the product info sheet see [Conditions of Use](#).