




NEVE UP: 16 A IoT connected actuator carbon matt

09593.CM

Wiring devices / View Wireless wiring devices / NEVE UP / Devices

16 A IoT connected actuator carbon matt

View Wireless connected electronic control device with NO 16(3,5)A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, double technology with Bluetooth® wireless technology 5.0 standard for the realization of View Wireless mesh system and Zigbee 3.0 standard, function for measuring the instant power and load cut-off threshold, RGB LED visible in darkness with brightness control, 100-240 V 50/60 Hz power supply, carbon matt

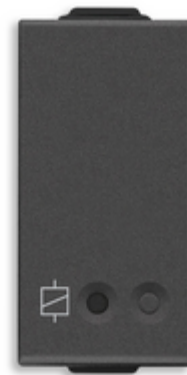

Product Status

3 - Active


Minimum order quantity

1 NR

Sheets, Manuals, Documentation

- [Light multilanguage instructions sheet \(838 kb\)](#)
- [Foglio istruzioni Full \(459 kb\)](#)
- [Notice technique Full \(549 kb\)](#)
- [Ficha de instrucciones Full \(455 kb\)](#)
- [Full instructions sheet \(453 kb\)](#)
- [Φυλλάδιο οδηγιών Full \(619 kb\)](#)
- [Anweisungsblatt Full \(456 kb\)](#)
- [Full \(517 kb\)](#)
- [Manuale app View Wireless \(16631 kb\)](#)
- [Manuel appli View Wireless \(36765 kb\)](#)
- [Manual app View Wireless \(36761 kb\)](#)
- [Manual View Wireless app \(36821 kb\)](#)
- [Εγχειρίδιο τεχνικού εγκατάστασης \(37889 kb\)](#)
- [Installationsanleitung View Wireless \(36780 kb\)](#)


Drawings



Space view



Backside view



3D View


Technical data

- **Class group:** Installation bus systems
- **Class:** Switch actuator for bus system
- **Bus system KNX:** No
- **Bus system KNX-RF (Radio Frequent):** No
- **Bus system radio frequent:** Yes
- **Bus system LON:** No
- **Bus system Powernet:** No
- **Other bus systems:** Other
- **Radio frequent bidirectional:** Yes
- **Mounting method:** Flush-mounted
- **Width in number of modular spacings:** 0
- **Local operation/hand operation:** Yes
- **With LED indication:** Yes
- **Number of digital inputs:** 0
- **Max. switching power:** 0 W
- **Max. switching power LED:** 0 W
- **Output power:** 0 W
- **Suitable for C-load:** No
- **Max. number of switching contacts:** 1
- **Max. switching current:** 16 A
- **Rated current:** 16 A
- **Rated operating voltage:** 100,00 - 240,00 V
- **Different phases connectable:** No
- **With bus connection:** No
- **Bus module detachable:** No
- **Modular expandability:** No
- **Degree of protection (IP):** IP40

Certifications

- 00. CE Marking - EU
- 37. Marking - Morocco
- 40. Bluetooth technology
- 42. Zigbee certified
- 46. UK PSTI compliance ([download](#))
- 96. Electrotechnical expert ([download](#))
- 99. WEEE Directive ([download](#))

Packaging



Code 8007352732261
Quantity 1 NR
Dim. 5.2x3.5x5.3 [cm]
Weight 53.6 [g]



Code 8007352732278
Quantity 60 NR
Dim. 27x23x12.5 [cm]
Weight 3,414 [g]

Legal

Vimar reserves the right to change at any time and without notice the characteristics of the products reported. Installation should be carried out by qualified staff in compliance with the current regulations regarding the installation of electrical equipment in the country where the products are installed. For the terms of use of the information on the product info sheet see [Conditions of Use](#).