



ARKÉ: 1P+N C6 120-230V CB Metal

19405.06.M

Wiring devices / Traditional wiring devices / ARKÉ / Devices

1P+N C6 120-230V CB Metal

1P+N C 6 circuit breaker, supply voltage 120-230 V~ 50-60 Hz, breaking capacity 1500 A, Metal

Product Status

3 - Active


Minimum order quantity

10 NR


Video

- [Arké lives in your time](#)


Drawings



Space view

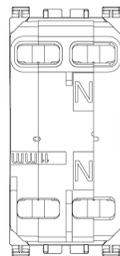


Backside view

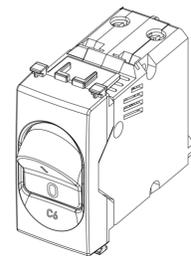

3D View



Gallery

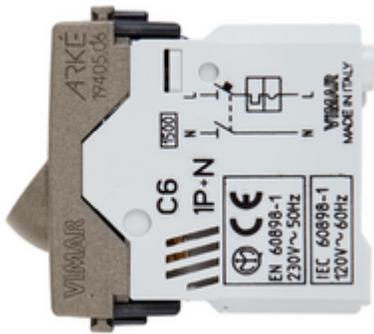

Technical data

- **Class group:** Circuit breakers and fuses
- **Class:** Earth leakage circuit breaker
- **Number of poles (total):** 2
- **Number of protected poles:** 1
- **Rated voltage:** 230 V
- **Rated current:** 6 A
- **Rated fault current:** 6 A
- **Leakage current type:** A
- **Current limiting class:** 1
- **Rated short-circuit breaking capacity I_{cn} according to EN 61009-1:** 1,50 kA
- **Voltage type:** AC
- **Frequency:** 50/60 Hz
- **Release characteristic:** C
- **Concurrently switching neutral conductor:** Yes
- **Over voltage category:** 3
- **Built-in depth:** 38,00 mm
- **Flush-mounted installation:** Yes
- **Anti- nuisance tripping version:** No
- **Degree of protection (IP):** IP40

Certifications

- 00. CE Marking - EU
- 37. Marking - Morocco
- 43. UKCA mark - Great Britain
- 96. Electrotechnical expert ([download](#))
- 99. WEEE Directive ([download](#))

Packaging



8 007352 600621

Code 8007352600621
Quantity 1 NR
Dim. 6x2.8x5.3 [cm]
Weight 55.7 [g]



8 007352 602304

Code 8007352602304
Quantity 10 NR
Dim. 14.4x13.1x6 [cm]
Weight 605.7 [g]

Legal

Vimar reserves the right to change at any time and without notice the characteristics of the products reported. Installation should be carried out by qualified staff in compliance with the current regulations regarding the installation of electrical equipment in the country where the products are installed. For the terms of use of the information on the product info sheet see [Conditions of Use](#).