EIKON: 1P 16AX reversing switch grey

20013

Wiring devices / Traditional wiring devices / EIKON / Devices

1P 16AX reversing switch grey

1P 16 AX 250 V~ reversing switch, lightable, replaceable button, grey. Max 200 W for self-ballasted lamps (IEC 60669-1:2017)

Product Status

3 - Active

Minimum order quantity

50 NR

Gallery

Drawings

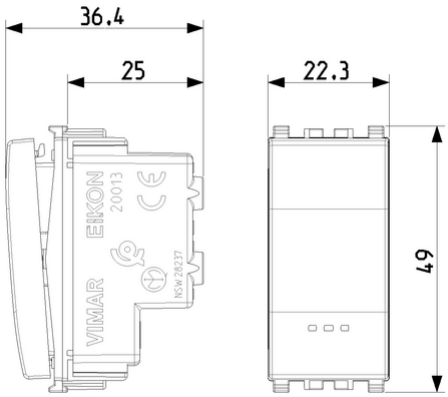

Space view

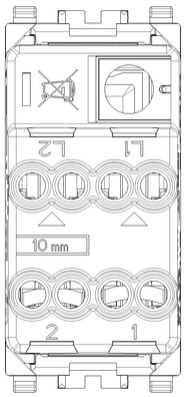

Backside view

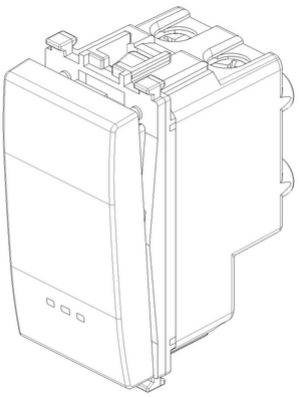

3D View

Certifications

- **00. CE Marking - EU**
- **01. IMQ - Italy (download)**
- **11. SNI-SUCOFINDO Indonesia**
- **14. TSE - Turkey**
- **15. CCC - China (download)**
- **19. NOM - Mexico**
- **20. IQC - Argentina**
- **31. TISI - Thailand**
- **35. RCM - Australia**
- **36. ISI - India**
- **37. Marking - Morocco**
- **92. RoHS UAE**
- **96. Electrotechnical expert (download)**
- **99. WEEE Directive (download)**

Technical data

Class group: Domestic switching devices

Class: Installation switch

Wiring system: Intermediate switch

Operating method: Rocker/button

Assembly arrangement: Modular device for domestic switching devices

Number of modules (module system): 1

Push button switch: Yes

Number of rockers: 1

Mounting method: Flush-mounted

Type of fastening: Engage (snap)

With mounting plate: No

Material: Plastic

Material quality: Thermoplastic

Halogen free: Yes

Surface protection: Untreated

Surface finishing: Matt

Colour: Grey

RAL-number (similar): 7024

Label space/information surface: Yes

Lighting: Optional

Function lighting: Control and orientation

Type of lighting: LED exchangeable

Suitable for degree of protection (IP): IP40

Nominal voltage: 250 V

Rated current: 16,00 A

Monitoring contact: No

Connection type: Screwed terminal

Washing machine switch: No

Device width: 22,30 mm

Device height: 49,00 mm

Device depth: 36,15 mm

Built-in depth: 25,00 mm

Packaging

8007352250765

Qtà	1 NR
Dim	4.1x2.8x5.3 [cm]
Weight	33.8 [g]

8007352250772

Qtà	50 NR
Dim	21.4x11.6x14.2 [cm]
Weight	1,786.27 [g]

8007352642768

Qtà	500 NR
Dim	57.5x22.5x30 [cm]
Weight	18,370 [g]

Legal

Vimar reserves the right to change at any time and without notice the characteristics of the products reported.Installation should be carried out by qualified staff in compliance with the current regulations regarding the installation of electrical equipment in the country where the products are installed.For the terms of use of the information on the product info sheet see Conditions of Use.