



## EIKON: 2P+E 16A P17/11 outlet+C16 RCBO white

### 20283.B

Wiring devices / Traditional wiring devices / EIKON / Devices

### 2P+E 16A P17/11 outlet+C16 RCBO white

2P+E 16 A 250 V~ SICURY Bpresa socket outlet, Italian standard P17/11, interlocked with 1P+N C 16 residual current breaker with overcurrent protection, supply voltage 230 V~ 50 Hz,  $I_{\Delta n}$  10 mA, breaking capacity 3000 A, white - 3 modules

### Product Status

2 - Will be discontinued


### Minimum order quantity

5 NR


### Sheets, Manuals, Documentation

- [Multilanguage instructions sheet \(777 kb\)](#)


### Drawings




Space view



Backside view



3D View

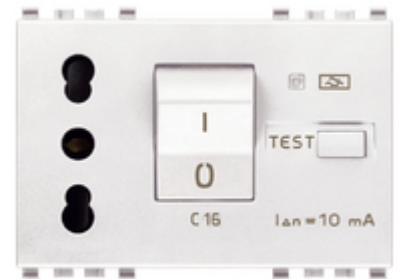

## Gallery



## Technical data

- **Class group:** Domestic switching devices
- **Class:** Socket outlet
- **Model:** Italian type Bipasso
- **Number of units:** 2
- **Number of modules (module system):** 3
- **Number of socket outlets switchable:** 1
- **Imprint/indication:** None
- **Connection type:** Screwed terminal
- **With hinged lid:** No
- **With enhanced contact protection:** Yes
- **Label space/information surface:** Yes
- **Colour:** White
- **RAL-number (similar):** 9016
- **Metallic colour:** No
- **Transparent:** No
- **Lockable:** No
- **Eject-mechanism:** No
- **Insulated mounting:** No
- **With function lighting:** Yes
- **With orientation lighting:** No
- **Over voltage protection:** No
- **Fault current protection:** Yes
- **With miniature fuse:** No
- **Mounting method:** Flush-mounted
- **Type of fastening:** Snap mounting (engagement)
- **Material:** Plastic
- **Material quality:** Thermoplastic
- **Surface protection:** Untreated
- **Surface finishing:** Matt
- **With loop through function:** No
- **With on/off switch:** Yes
- **Rotated central insert:** No
- **Nominal current:** 16 A
- **Nominal voltage:** 230 V
- **Frequency:** 50,00 - 50,01 HZ
- **Rated fault current:** 10 mA
- **Suitable for degree of protection (IP):** IP20
- **Impact strength:** Other
- **Device width:** 44,80 mm
- **Device height:** 49,00 mm
- **Device depth:** 56,30 mm

## Certifications

- 00. CE Marking - EU
- 01. IMQ - Italy ([download](#))
- 10. EAC Eurasian Customs Union
- 37. Marking - Morocco
- 96. Electrotechnical expert ([download](#))
- 99. WEEE Directive ([download](#))

# Packaging



**Code** 8007352314313  
**Quantity** 1 NR  
**Dim.** 5.2x5.7x7.6 [cm]  
**Weight** 138.07 [g]

**Code** 8007352314320  
**Quantity** 5 NR  
**Dim.** 21.4x11.6x6 [cm]  
**Weight** 751.87 [g]

# Legal

Vimar reserves the right to change at any time and without notice the characteristics of the products reported. Installation should be carried out by qualified staff in compliance with the current regulations regarding the installation of electrical equipment in the country where the products are installed. For the terms of use of the information on the product info sheet see [Conditions of Use](#).