



EIKON: TV-RD-SAT through-line.out.2outs white

20302.10.B

Wiring devices / Traditional wiring devices / EIKON / Devices

TV-RD-SAT through-line.out.2outs white

Coaxial TV-RD-SAT 5-2400 MHz socket outlet, through-line, demix, 2 outputs with male (TV-RD) and female F-type (SAT) connectors, connection attenuation 10 dB, white - 2 modules

Product Status


3 - Active

Minimum order quantity


5 NR

Sheets, Manuals, Documentation


- [Multilanguage instructions sheet \(905 kb\)](#)

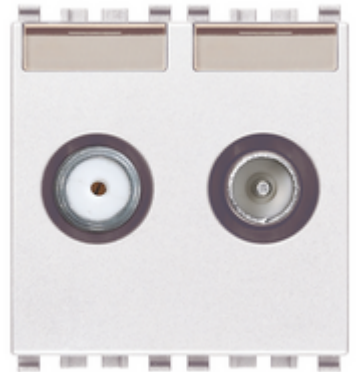


Drawings



Space view



Backside view



3D View

Technical data

- **Class group:** Antenna and satellite technique
- **Class:** Antenna socket box
- **Model:** TWIN end socket
- **Cover:** None
- **Tap loss at 860 MHz:** 11,20 dB
- **Tap loss at 2150 MHz:** 12,00 dB
- **Number of outlets:** 2
- **Through loss at 860 MHz:** 2,00 dB
- **Through loss at 2150 MHz:** 2,80 dB
- **Suitable for remote power supply:** No
- **Type of fastening:** Snap mounting (engagement)
- **Colour:** White
- **RAL-number (similar):** 9016
- **Material:** Plastic

Certifications

- 00. CE Marking - EU
- 10. EAC Eurasian Customs Union
- 37. Marking - Morocco
- 43. UKCA mark - Great Britain
- 99. WEEE Directive ([download](#))

Packaging



8 007352 405547

Code 8007352405547
Quantity 1 NR
Dim. 5.1x4.3x5.3 [cm]
Weight 79.3 [g]



8 007352 405554

Code 8007352405554
Quantity 5 NR
Dim. 14.4x11.6x6 [cm]
Weight 449.3 [g]

Legal

Vimar reserves the right to change at any time and without notice the characteristics of the products reported. Installation should be carried out by qualified staff in compliance with the current regulations regarding the installation of electrical equipment in the country where the products are installed. For the terms of use of the information on the product info sheet see [Conditions of Use](#).