



EIKON: TV-RD-SAT through-line.out.2outs Next

20302.10.N

Wiring devices / Traditional wiring devices / EIKON / Devices

TV-RD-SAT through-line.out.2outs Next

Coaxial TV-RD-SAT 5-2400 MHz socket outlet, through-line, demix, 2 outputs with male (TV-RD) and female F-type (SAT) connectors, connection attenuation 10 dB, Next- 2 modules

Product Status

3 - Active


Minimum order quantity

5 NR


Sheets, Manuals, Documentation

- [Multilanguage instructions sheet \(905 kb\)](#)


Drawings




Space view



Backside view



3D View

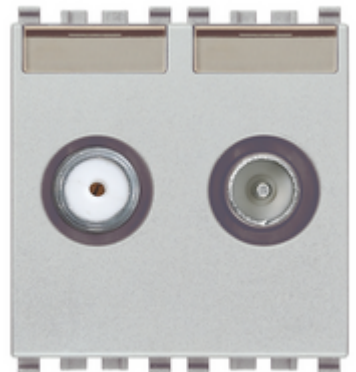

Technical data

- **Class group:** Antenna and satellite technique
- **Class:** Antenna socket box
- **Model:** TWIN end socket
- **Cover:** None
- **Tap loss at 860 MHz:** 11,20 dB
- **Tap loss at 2150 MHz:** 12,00 dB
- **Number of outlets:** 2
- **Through loss at 860 MHz:** 2,00 dB
- **Through loss at 2150 MHz:** 2,80 dB
- **Suitable for remote power supply:** No
- **Type of fastening:** Snap mounting (engagement)
- **Colour:** Silver
- **RAL-number (similar):** 9022
- **Surface protection:** Lacquered
- **Material:** Plastic

Certifications

- 00. CE Marking - EU
- 10. EAC Eurasian Customs Union
- 37. Marking - Morocco
- 43. UKCA mark - Great Britain
- 99. WEEE Directive ([download](#))

Packaging



Code 8007352405561
Quantity 1 NR
Dim. 5.1x4.3x5.3 [cm]
Weight 79.3 [g]

Code 8007352405578
Quantity 5 NR
Dim. 14.4x11.6x6 [cm]
Weight 449.3 [g]

Legal

Vimar reserves the right to change at any time and without notice the characteristics of the products reported. Installation should be carried out by qualified staff in compliance with the current regulations regarding the installation of electrical equipment in the country where the products are installed. For the terms of use of the information on the product info sheet see [Conditions of Use](#).