



EIKON: 1P+N C16 10mA RCBO Next

20411.16.N

Wiring devices / Traditional wiring devices / EIKON / Devices

1P+N C16 10mA RCBO Next


1P+N C 16 residual current breaker with overcurrent protection, supply voltage 120-230 V~ 50-60 Hz, $I_{\Delta n}$ 10 mA, breaking capacity 3000 A, Next - 2 modules

Product Status

3 - Active

Minimum order quantity


5 NR

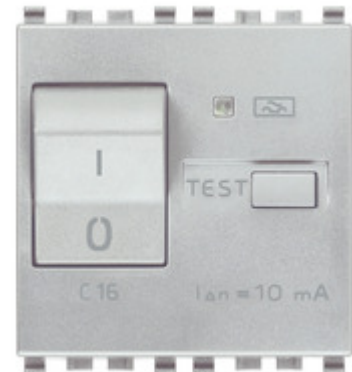


Sheets, Manuals, Documentation

- [Multilanguage instructions sheet \(688 kb\)](#)


Drawings

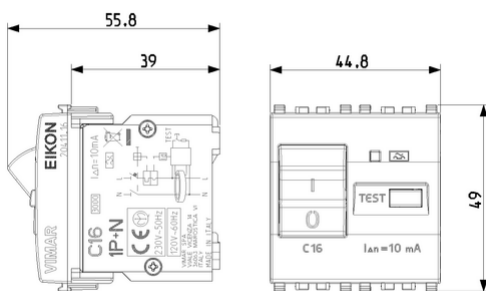

Space view

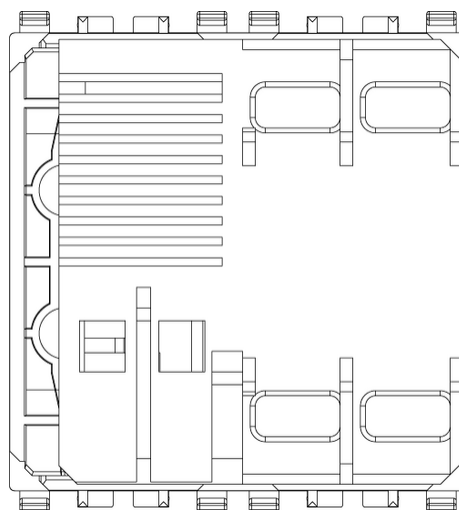

Backside view

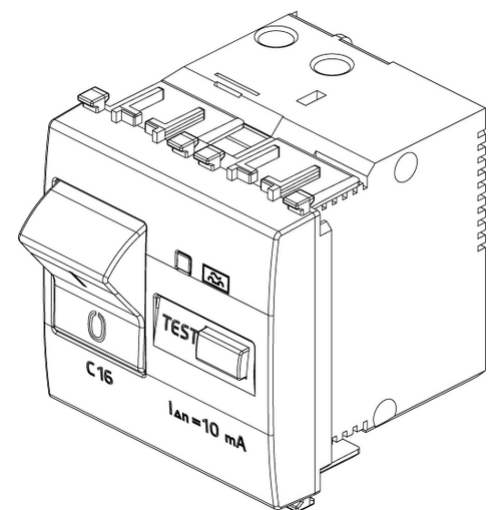

3D View

Certifications

- 00. CE Marking - EU
- 01. IMQ - Italy ([download](#))
- 37. Marking - Morocco
- 96. Electrotechnical expert ([download](#))
- 99. WEEE Directive ([download](#))

Technical data

Class group: Circuit breakers and fuses

Class: Earth leakage circuit breaker

Number of poles (total): 2

Number of protected poles: 1

Rated voltage: 230 V

Rated current: 16 A

Rated fault current: 16 A

Mounting method: Built-in

Leakage current type: A

Current limiting class: 1

Rated short-circuit breaking capacity I_{cn} according to EN 61009-1: 3.000,00 kA

Surge current capacity: 3,00 kA

Voltage type: AC

Frequency: 50/60 Hz

Release characteristic: C

Concurrently switching neutral conductor: Yes

Overvoltage category: 3

Built-in depth: 38,00 mm

Anti- nuisance tripping version: No

Degree of protection (IP): IP40

Packaging



8 007352 286443

8007352286443

Qtà 1 NR

Dim 6x5.4x5.3 [cm]

Weight 98.07 [g]



8 007352 286450

8007352286450

Qtà 5 NR

Dim 17.2x13.1x6 [cm]

Weight 551.67 [g]

Legal

Vimar reserves the right to change at any time and without notice the characteristics of the products reported. Installation should be carried out by qualified staff in compliance with the current regulations regarding the installation of electrical equipment in the country where the products are installed. For the terms of use of the information on the product info sheet see [Condizioni di utilizzo](#).