EIKON: Connected RFID outer switch Next

20462.N

Wiring devices / View Wireless wiring devices / EIKON / Devices

Connected RFID outer switch Next

RFID smart card landing reader, card configuration using View Wireless App, Bluetooth technology standard, IoT technology on Bluetooth technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 120-240 V~ 50/60 Hz, 1 DND input, LED with brightness control, 100-240 V~ 50/60 Hz power supply, Next - 2 modules

Product Status

3 - Active

Minimum order quantity

1 NR

Sheets, Manuals, Documentation

- Full Multilanguage instructions sheet (1333 kb)
- Light multilanguage instructions sheet (799 kb)
- Manuale Portale View Vimar (3241 kb)
- Manuel Portail View Vimar (1975 kb)
- Manual Portal Vimar View (1943 kb)
- Vimar View Portal manual (2047 kb)
- Εγχειρίδιο χρήσης Πύλη View Vimar (2085 kb)
- Bedienungsanleitung Portal View Vimar (2057 kb)
- Manuale app View Wireless (19693 kb)
- Manuel appli View Wireless (43543 kb)
- Manual app View Wireless (43542 kb)
- Manual View Wireless app (42589 kb)
- Εγχειρίδιο τεχνικού εγκατάστασης (43825 kb)
- Installationsanleitung View Wireless (43598 kb)

Drawings

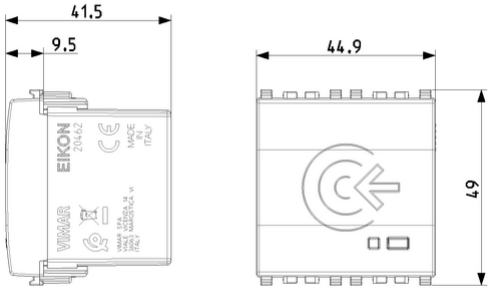

Space view

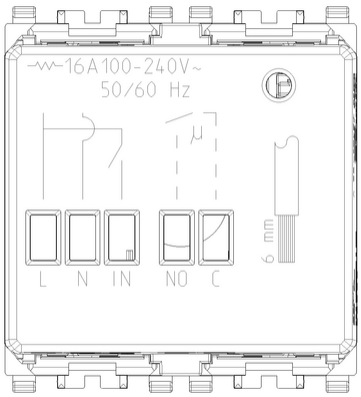

Backside view

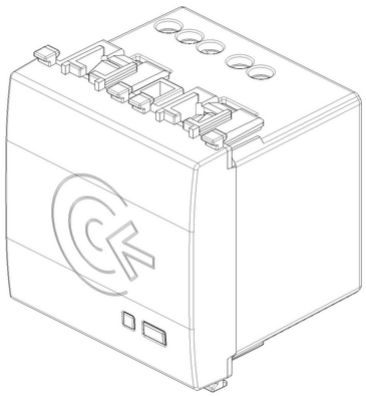

3D View

Certifications

- **00. CE Marking - EU (download)**
- **37. Marking - Morocco**
- **40. Bluetooth technology**
- **46. UK PSTI compliance (download)**
- **96. Electrotechnical expert (download)**
- **99. WEEE Directive (download)**

Technical data

Class group: Alarm installations, emergency call and signalling

Class: Access control system component

Model: Reader

Standalone: Yes

Networkable: No

PC-binding: No

Type of interface: Other

Max. number of users: 200

Type of reading technique: Code

Signalling: Light signal

Mounting method: Flush-mounted

Operating voltage AC 50 Hz: 230,00 - 230,01 V

Operating voltage AC 60 Hz: 230,00 - 230,01 V

Power over Ethernet (PoE): Other

Degree of protection (IP): IP20

Colour: Silver

Material: Plastic

Width: 44,90 mm

Height: 49,00 mm

Depth: 41,50 mm

Packaging

8007352659896

Qtà	1 NR
Dim	6x5.4x5.2 [cm]
Weight	74.8 [g]

8007352663244

Qtà	10 NR
Dim	28.1x13.1x6 [cm]
Weight	824.8 [g]

You may also be interested in

03981 - IoT connected relay module

03983 - 3IN 1OUT IoT connected module

Legal

Vimar reserves the right to change at any time and without notice the characteristics of the products reported.Installation should be carried out by qualified staff in compliance with the current regulations regarding the installation of electrical equipment in the country where the products are installed.For the terms of use of the information on the product info sheet see Conditions of Use.