EIKON: 16 A IoT connected actuator white

20593.B

Wiring devices / View Wireless wiring devices / EIKON / Devices

16 A IoT connected actuator white

View Wireless connected electronic control device with NO 16(3,5)A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, double technology with Bluetooth® wireless technology 5.0 standard for the realization of View Wireless mesh system and Zigbee 3.0 standard, function for measuringthe instant power and load cut-off threshold, RGB LED visible in darkness with brightness control, 100-240 V 50/60 Hz power supply, white

- Configuration from View Wireless App for Bluetooth technology system and Amazon App for Zigbee technology
- Compatible with Alexa, Google Home and IFTTT, using the dedicated gateway or Zigbee hub
- Compatible with SmartThings hub

Product Status

3 - Active

Minimum order quantity

1 NR

Sheets, Manuals, Documentation

- Light multilanguage instructions sheet (987 kb)
- Foglio istruzioni Full (551 kb)
- Feuille d’instructions Full (549 kb)
- Hoja de instrucciones Full (547 kb)
- Full instructions sheet (545 kb)
- Φυλλάδιο οδηγιών Full (720 kb)
- Anweisungsblatt Full (547 kb)
- ورقة الإرشادات Full (611 kb)
- Manuale app View Wireless (19698 kb)
- Manuel appli View Wireless (42466 kb)
- Manual app View Wireless (42466 kb)
- Manual View Wireless app (42593 kb)
- Εγχειρίδιο τεχνικού εγκατάστασης (42754 kb)
- Installationsanleitung View Wireless (42520 kb)

Gallery

Drawings

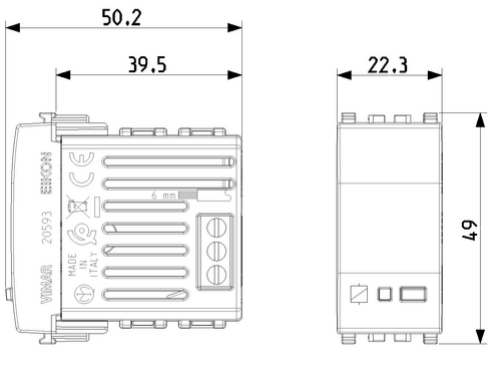

Space view

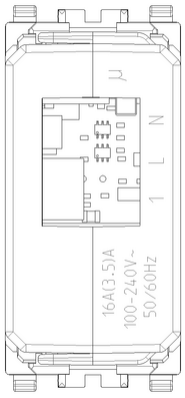

Backside view

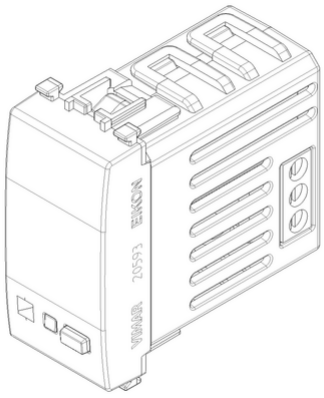

3D View

Certifications

- **00. CE Marking - EU (download)**
- **01. IMQ - Italy (download)**
- **06. SUBTEL - Chile (download)**
- **19. NOM - Mexico**
- **37. Marking - Morocco**
- **40. Bluetooth technology**
- **42. Zigbee certified**
- **46. UK PSTI compliance (download)**
- **47. Works with SmartThings**
- **96. Electrotechnical expert (download)**
- **99. WEEE Directive (download)**

Technical data

Class group: Installation bus systems

Class: Switch actuator for bus system

Bus system KNX: No

Bus system KNX-RF (Radio Frequency): No

Bus system radio frequency: Yes

Bus system LON: No

Bus system Powernet: No

Other bus systems: None

Radio frequency bidirectional: Yes

Mounting method: Flush-mounted

Width in number of modular spacings: 1

Local operation/hand operation: Yes

With LED indication: Yes

Suitable for C-load: Yes

Max. number of switching contacts: 1

Rated current: 16 A

Rated operating voltage: 100,00 - 240,00 V

Different phases connectable: No

With bus connection: Yes

Modular expandability: No

Degree of protection (IP): IP40

Packaging

8007352628502

Qtà	1 NR
Dim	5.2x3.5x5.3 [cm]
Weight	56 [g]

8007352628519

Qtà	60 NR
Dim	27x23x12.5 [cm]
Weight	3,526 [g]

You may also be interested in

03925 - Bluetooth Low Energy RF device

20597.B - IoT connected gateway 2M white

20203.B - 2P+E 16A P17/11 outlet white

Legal

Vimar reserves the right to change at any time and without notice the characteristics of the products reported.Installation should be carried out by qualified staff in compliance with the current regulations regarding the installation of electrical equipment in the country where the products are installed.For the terms of use of the information on the product info sheet see Conditions of Use.