



## LINEA: Switched 2P+E 5A English outlet white

### 30215.B

Wiring devices / Traditional wiring devices / LINEA / Devices

### Switched 2P+E 5A English outlet white

2P+E 5 A 250 V~ SICURY socket outlet, British standard with 2P 1-way switch, complete with mounting frame for installation in square BS mounting boxes, to be completed with BS 3-module cover plate, white



### Product Status

3 - Active



### Minimum order quantity

10 NR


## Sheets, Manuals, Documentation

- [Multilanguage instructions sheet \(1367 kb\)](#)


## Drawings



Space view

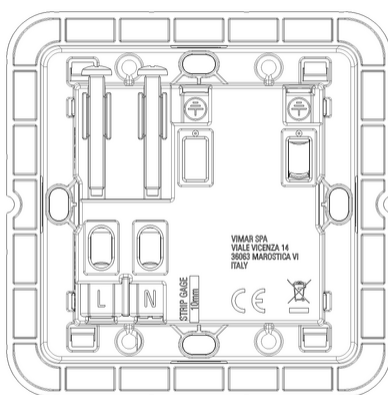

Backside view

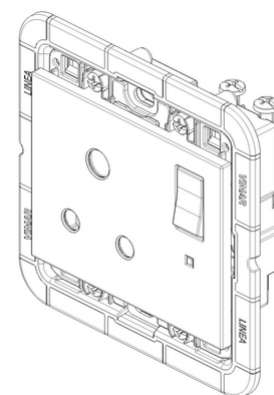

3D View

## Certifications

- **00. CE Marking - EU**
- **08. ASTA - UK ([download](#))**
- **30. G-Mark - Gulf Countries ([download](#))**
- **37. Marking - Morocco**
- **99. WEEE Directive ([download](#))**

## Technical data

**Class group:** Domestic switching devices

**Class:** Socket outlet

**Model:** British Standard

**Concurrently switching neutral conductor:** No

**Protective contact:** Other

**Number of active contacts (round):** 0

**Number of active contacts (flat):** 0

**Number of active contacts (square):** 0

**Mounting direction:** Vertical

**Assembly arrangement:** Modular device for domestic switching devices

**With signal lamp:** No

**Number of ports USB-A:** 0

**Number of ports USB-C:** 0

**Number of socket outlets:** 1

**Socket outlets phase-separated:** No

**Number of modules (module system):** 4

**Number of socket outlets switchable:** 0

**Number of phases:** 1

**Imprint/indication:** Other

**Connection type:** Screwed terminal and push-in clamp

**With hinged lid:** No

**With enhanced contact protection:** Yes

**Label space/information surface:** No

**Colour:** White

**Metallic colour:** No

**Transparent:** No

**Lockable:** No

**Eject-mechanism:** No

**Insulated mounting:** No

**With function lighting:** No

**With orientation lighting:** No

**Overvoltage protection:** No

**Fault current protection:** No

**With miniature fuse:** No

**Special power supply:** None

**Mounting method:** Flush-mounted

**Type of fastening:** Snap mounting (engagement)

**Material:** Plastic

**Material quality:** Thermoplastic

**Halogen free:** Yes

**Anti-bacterial treatment:** No

**With loop through function:** No

**With on/off switch:** Yes

**Rotated central insert:** No

**Nominal current:** 5 A

**Nominal voltage:** 250 V

**Frequency:** 50,00 - 60,00 HZ

**Rated fault current:** 0 mA

**Suitable for degree of protection (IP):** IP40

**Impact strength:** Other

**Device width:** 82,70 mm

**Device height:** 82,70 mm

**Device depth:** 32,25 mm

**Min. depth of built-in installation box:** 24,85 mm

**Compatible with Apple HomeKit:** No

**Compatible with Amazon Alexa:** No

**Compatible with Google Assistant:** No

**IFTTT support available:** No

**With Wi-Fi signal repeater:** No

**With built-in bluetooth speaker:** No

**For heavy conditions according to VDE:** No

**Inflammability class of insulation material according to UL 94:** Other

**Compliant with UK Building Regulations Part**

**M:** Yes

## Packaging



8 007352 777514

8007352777514

**Qtà** 1 NR

**Dim** 8.5x3.6x8.5 [cm]

**Weight** 106 [g]



8 007352 777521

8007352777521

**Qtà** 10 NR

**Dim** 18.5x18x9.8 [cm]

**Weight** 1,171 [g]



8 007352 822719

8007352822719

**Qtà** 80 NR

**Dim** 40x39x22 [cm]

**Weight** 9,858 [g]

## Legal

Vimar reserves the right to change at any time and without notice the characteristics of the products reported. Installation should be carried out by qualified staff in compliance with the current regulations regarding the installation of electrical equipment in the country where the products are installed. For the terms of use of the information on the product info sheet see [Conditions of Use](#).