



LINEA: Switched 2P+E 13A English outlet canvas

30221.C

Wiring devices / Traditional wiring devices / LINEA / Devices

Switched 2P+E 13A English outlet canvas

2P+E 13 A 250 V~ SICURY socket outlet, British standard with 2P 1-way switch, complete with mounting frame for installation in square BS mounting boxes, to be completed with BS 3-module cover plate, canvas



Product Status

3 - Active


Minimum order quantity

10 NR


Sheets, Manuals, Documentation

- [Multilanguage instructions sheet \(1114 kb\)](#)


Drawings

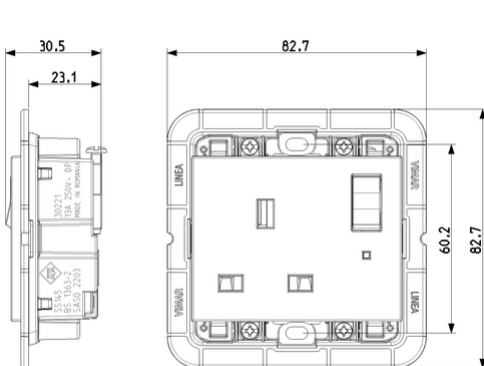

Space view

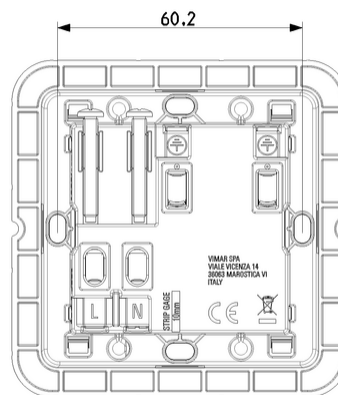

Backside view

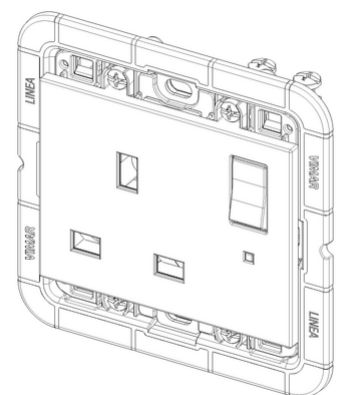

3D View

Certifications

- 00. CE Marking - EU
- 00. CE Marking - EU
- 08. ASTA - UK ([download](#))
- 30. G-Mark - Gulf Countries ([download](#))
- 37. Marking - Morocco
- 99. WEEE Directive ([download](#))

Technical data

Class group: Domestic switching devices

Class: Socket outlet

Model: British Standard

Concurrently switching neutral conductor: No

Protective contact: Other

Number of active contacts (round): 0

Number of active contacts (flat): 0

Number of active contacts (square): 0

Mounting direction: Vertical

Assembly arrangement: Modular device for domestic switching devices

With signal lamp: No

Number of ports USB-A: 0

Number of ports USB-C: 0

Number of socket outlets: 1

Socket outlets phase-separated: No

Number of modules (module system): 4

Number of socket outlets switchable: 0

Number of phases: 1

Imprint/indication: Other

Connection type: Screwed terminal and push-in clamp

With hinged lid: No

With enhanced contact protection: Yes

Label space/information surface: No

Colour: Beige

Metallic colour: No

Transparent: No

Lockable: No

Eject-mechanism: No

Insulated mounting: No

With function lighting: No

With orientation lighting: No

Overvoltage protection: No

Fault current protection: No

With miniature fuse: No

Special power supply: None

Mounting method: Flush-mounted

Type of fastening: Snap mounting (engagement)

Material: Plastic

Material quality: Thermoplastic

Halogen free: Yes

Anti-bacterial treatment: No

With loop through function: No

With on/off switch: Yes

Rotated central insert: No

Nominal current: 13 A

Nominal voltage: 250 V

Frequency: 50,00 - 60,00 HZ

Rated fault current: 0 mA

Suitable for degree of protection (IP): IP40

Impact strength: Other

Device width: 82,70 mm

Device height: 82,70 mm

Device depth: 30,50 mm

Min. depth of built-in installation box: 23,10 mm

Compatible with Apple HomeKit: No

Compatible with Amazon Alexa: No

Compatible with Google Assistant: No

IFTTT support available: No

With Wi-Fi signal repeater: No

With built-in bluetooth speaker: No

For heavy conditions according to VDE: No

Inflammability class of insulation material according to UL 94: Other

Compliant with UK Building Regulations Part

M: Yes

Packaging



8 007352 777736

8007352777736

Qtà 1 NR

Dim 8.5x3.6x8.5 [cm]

Weight 107.8 [g]



8 007352 777743

8007352777743

Qtà 10 NR

Dim 18.5x18x9.8 [cm]

Weight 1,187.6 [g]



8 007352 777750

8007352777750

Qtà 80 NR

Dim 40x39x22 [cm]

Weight 10,028 [g]

Legal

Vimar reserves the right to change at any time and without notice the characteristics of the products reported. Installation should be carried out by qualified staff in compliance with the current regulations regarding the installation of electrical equipment in the country where the products are installed. For the terms of use of the information on the product info sheet see [Conditions of Use](#).