



LINEA: 2 2P+E13ABS socket+red switch+A/C-USB bl

30224.ACG

Wiring devices / Traditional wiring devices / LINEA / Devices

2 2P+E13ABS socket+red switch+A/C-USB bl

Two 2P+T 13 A 250 V~ SICURY socket outlets, British standard with two 2P 1-way switches with red sign, 15 W 3 A 5 V USB power supply unit with 1 USB type A output and one USB type C output optimised to charge 2 devices simultaneously (e.g. tablet, smartphone), complete with mounting frame for installation in rectangular BS mounting boxes, to be completed with BS 5-module cover plate, black



Product Status

3 - Active


Minimum order quantity

5 NR


Sheets, Manuals, Documentation

- [Multilanguage instructions sheet \(1032 kb\)](#)


Drawings

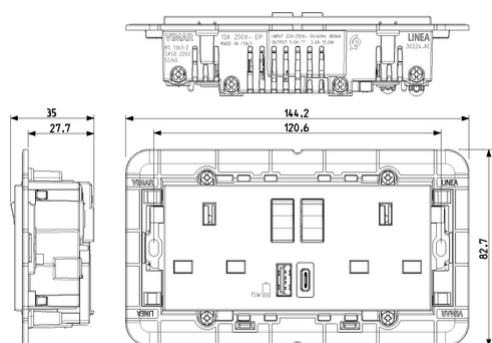

Space view

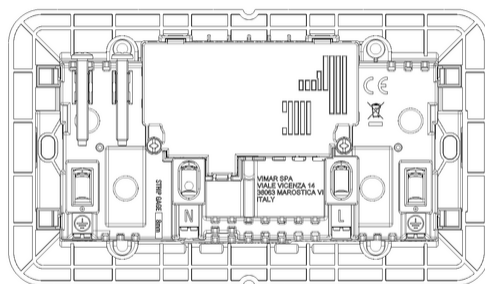

Backside view

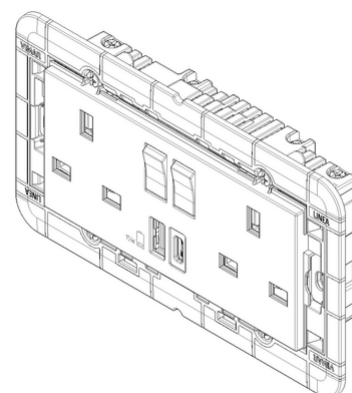

3D View

Certifications

- 00. CE Marking - EU
- 96. Electrotechnical expert ([download](#))
- 99. WEEE Directive ([download](#))

Technical data

Class group: Domestic switching devices

Class: Socket outlet

Model: British Standard

Concurrently switching neutral conductor: Yes

Protective contact: Other

Assembly arrangement: Modular device for domestic switching devices

With signal lamp: No

Number of ports USB-A: 1

Number of ports USB-C: 1

Max. current rating of USB power supply: 3 A

Number of socket outlets: 2

Socket outlets phase-separated: No

Number of modules (module system): 4

Number of socket outlets switchable: 0

Number of phases: 1

Imprint/indication: Other

Connection type: Screwed terminal and push-in clamp

With hinged lid: No

With enhanced contact protection: Yes

Label space/information surface: Yes

Colour: Black

RAL-number (similar): 7021

Metallic colour: No

Transparent: No

Lockable: No

Eject-mechanism: No

Insulated mounting: No

With function lighting: Yes

With orientation lighting: No

Overvoltage protection: No

Fault current protection: No

With miniature fuse: No

Special power supply: None

Mounting method: Flush-mounted

Type of fastening: Snap mounting (engagement)

Material: Plastic

Material quality: Thermoplastic

Halogen free: Yes

Anti-bacterial treatment: No

With loop through function: No

With on/off switch: Yes

Rotated central insert: No

Nominal current: 13 A

Nominal voltage: 250 V

Frequency: 50,00 - 60,00 HZ

Suitable for degree of protection (IP): IP40

Impact strength: Other

Device width: 144,20 mm

Device height: 82,70 mm

Device depth: 35,00 mm

Min. depth of built-in installation box: 27,70 mm

Compatible with Apple HomeKit: No

Compatible with Amazon Alexa: No

Compatible with Google Assistant: No

IFTTT support available: No

With Wi-Fi signal repeater: No

With built-in bluetooth speaker: No

For heavy conditions according to VDE: No

Inflammability class of insulation material
according to **UL 94**: Other

Packaging



8 007352 778214

8007352778214

Qtà 1 NR

Dim 8.5x3.6x14.8
[cm]

Weight 200 [g]



8 007352 778221

8007352778221

Qtà 5 NR

Dim 19.3x15.8x9.6
[cm]

Weight 1,090 [g]



8 007352 778238

8007352778238

Qtà 40 NR

Dim 40x33x22 [cm]

Weight 9,190 [g]

Legal

Vimar reserves the right to change at any time and without notice the characteristics of the products reported. Installation should be carried out by qualified staff in compliance with the current regulations regarding the installation of electrical equipment in the country where the products are installed. For the terms of use of the information on the product info sheet see [Conditions of Use](#).