




## LINEA: 4-button KNX control+roller sh.slats 2M

**30582**

Smart systems&products / KNX / LINEA / Devices

### 4-button KNX control+roller sh.slats 2M

Control device with four push buttons and actuator for 1 roller shutter with slat orientation with change-over relay output for cosφ 0.6 motor 2 A 120-240 V~ 50/60 Hz, KNX standard, RGB LED visible in darkness with brightness control, to be completed with two 1- or 2-module interchangeable half-button caps - 2 modules

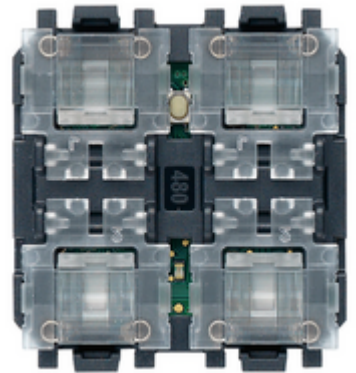

### Product Status

3 - Active

### Minimum order quantity

1 NR

You may also be interested in



31480.FG - 2 half buttons  
1M arrow symbols black




31480.FB - 2 half buttons  
1M arrow symbols white




31480.FC - 2 half buttons  
1M arrow symbols canvas



31480.2FG - 2 half buttons  
2M arrow symbols black



31480.2FB - 2 half buttons  
2M arrow symbols white



31480.2FC - 2 half buttons  
2M arrow symbols canvas


## Sheets, Manuals, Documentation

- [Light Multilanguage instructions sheet \(632 kb\)](#)
- [Full Multilanguage instructions sheet \(724 kb\)](#)
- [Manuale installatore \(2899 kb\)](#)
- [Installer manual \(1937 kb\)](#)


## Product Software

- [DB\\_ComandoSupervisione\\_KNX\\_REL-01.17\\_20230117.zip](#)


## Drawings



Space view



Backside view



3D View


## Technical data

- **Class group:** Installation bus systems
- **Class:** Multi operating device for bus system
- **Bus system KNX:** Yes
- **Bus system KNX-RF (Radio Frequent):** No
- **Bus system radio frequent:** No
- **Bus system LON:** No
- **Bus system Powernet:** No
- **Other bus systems:** Other
- **Radio frequent bidirectional:** No
- **Mounting method:** Flush-mounted
- **Width in number of modular spacings:** 2
- **Number of actuation points:** 4
- **With display:** No
- **Status-LED:** Yes
- **IR sensor:** No
- **Manual set point setting:** No
- **Presence button:** No
- **With temperature controller:** No
- **With integrated DCF77 receiver:** No
- **With time switch clock:** No
- **With anti-theft/dismantling protection:** No
- **Central functional unit for senders/actuators:** No
- **Material:** Plastic
- **Material quality:** Thermoplastic
- **Surface protection:** Untreated
- **Surface finishing:** Matt
- **Colour:** Other
- **RAL-number (similar):** 7024
- **Transparent:** No
- **Degree of protection (IP):** IP40
- **With bus connection:** Yes

## Certifications

- 00. CE Marking - EU
- 27. KNX ([download](#))
- 37. Marking - Morocco
- 43. UKCA mark - Great Britain
- 46. UK PSTI compliance ([download](#))
- 99. WEEE Directive ([download](#))

# Packaging



**Code** 8007352689497  
**Quantity** 1 NR  
**Dim.** 6x5.4x5.2 [cm]  
**Weight** 61.4 [g]

**Code** 8007352689503  
**Quantity** 60 NR  
**Dim.** 37.5x30x13.5 [cm]  
**Weight** 3,995 [g]

# Legal

Vimar reserves the right to change at any time and without notice the characteristics of the products reported. Installation should be carried out by qualified staff in compliance with the current regulations regarding the installation of electrical equipment in the country where the products are installed. For the terms of use of the information on the product info sheet see [Conditions of Use](#).