



IP: Bullet camera 4Mpx 2,8-12mm° Color Plus

4621.2812DL

Safety / ELVOX CCTV / IP / Cameras

Bullet camera 4Mpx 2,8-12mm° Color Plus

IP Bullet camera, CMOS 1/2.9" sensor, 4 Mpx resolution (2688x1520), 2.8-12 mm motor-driven varifocal lens, mechanical IR filter, H.265+ Multistream compression, PoE or 12 VDC power supply, SD CARD slot, colour viewing in the dark with superior light sensitivity (0.0005 Lux) and white LEDs 20-30 m, AV with target detection, WDR, ROI, 3DNR, HLC, BLC, Mask, Motion, Smart IR, RTSP functions, ONVIF protocol, protection degree IP67.

Dimensions: 81x81x218 mm. Weight 640 g



Product Status

3 - Active


Minimum order quantity

1 NR


Sheets, Manuals, Documentation

- [Multilanguage instructions sheet \(922 kb\)](#)
- [Video Analysis Configuration on IP cam. \(9120 kb\)](#)
- [IP camera management - Installer manual \(15380 kb\)](#)

Drawings

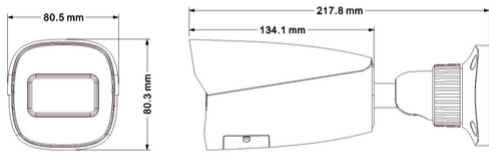

Space view

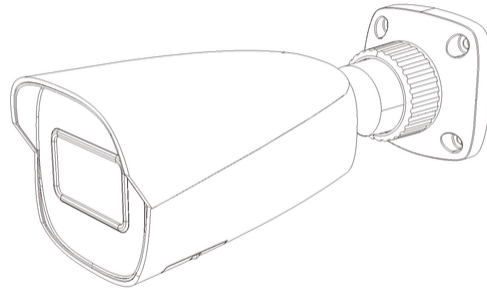

3D View

Certifications

- 00. CE Marking - EU
- 37. Marking - Morocco
- 45. NDAA compliant ([download](#))
- 99. WEEE Directive ([download](#))

Technical data

Class group: Alarm installations, emergency call and signalling

Class: Camera for surveillance system

Model: Standard (Fixed)

Construction type: Bullet shape

Thermal camera: No

Number of pixels (Megapixel): 4

With lens: Yes

Modular (lens and camera separated): No

Focal size: 2,80 - 12,00 mm

Shutter control: DC

Lens connection: Other

Motor zoom: Yes

Suitable for wall mounting: Yes

Suitable for ceiling mounting: Yes

Suitable for corner mounting: No

Suitable for surface mounting: Yes

Flush-mounted installation/built-in installation: No

Suitable for outdoor use: Yes

Communication medium wired: Yes

Communication medium wireless: No

Type of interface: Wi-Fi

Protocol: TCP/IP

Power over Ethernet (PoE): 802.3af (PoE)

Picture system: PAL

Frame rate: 25

Property picture system: Colour

With infrared lighting: Yes

Max. infrared reach: 50 m

With white light: No

Max. white light reach: 0 m

Supports H.264 codec: Yes

Supports H.265 codec: Yes

Supports Motion JPEG codec: Yes

Supports MPEG-4 codec: No

With video motion detector: Yes

With integrated AI analysis: Yes

With slot for memory card: Yes

With memory card: No

Memory capacity: 256

Number of digital inputs: 0

Number of digital outputs: 0

Number of audio inputs: 1

Number of audio outputs: 0

With integrated audio analysis: No

HDMI-connection: No

Mini HDMI-connection: No

VGA-connection (D-Sub 15-pole): No

DVI-connection: No

BNC-connection: No

DisplayPort-connection: No

Mini DisplayPort: No

S-Video-connection: No

USB-C-connection: No

Vandal proof: No

Impact strength: Other

Degree of protection (IP): IP67

Horizontal field of view: 3.100,00 - 9.400,00

With microphone: Yes

With loudspeaker: No

Power consumption: 550,00 W

Supply voltage: 12,00 - 12,01 V

Voltage type: DC

Colour: White

Diameter: 8.100,00 mm

Height: 81,00 mm

Width: 8.100,00 mm

Depth: 218,00 mm

Compatible with Apple HomeKit: No

Compatible with Google Assistant: No

Compatible with Amazon Alexa: No

IFTTT support available: No

Packaging



8007352802810

Qtà 1 NR

Dim 26.5x11.5x12
[cm]

Weight 818 [g]

You may also be interested in



[46922.040 - IP camera contacts bracket](#)



[46917.005 - Pole bracket IP cams](#)

Legal

Vimar reserves the right to change at any time and without notice the characteristics of the products reported. Installation should be carried out by qualified staff in compliance with the current regulations regarding the installation of electrical equipment in the country where the products are installed. For the terms of use of the information on the product info sheet see [Conditions of Use](#).