




**VIEW WIRELESS**

CATALOGUE ENGLISH

**VIEW**   
IoT smart life



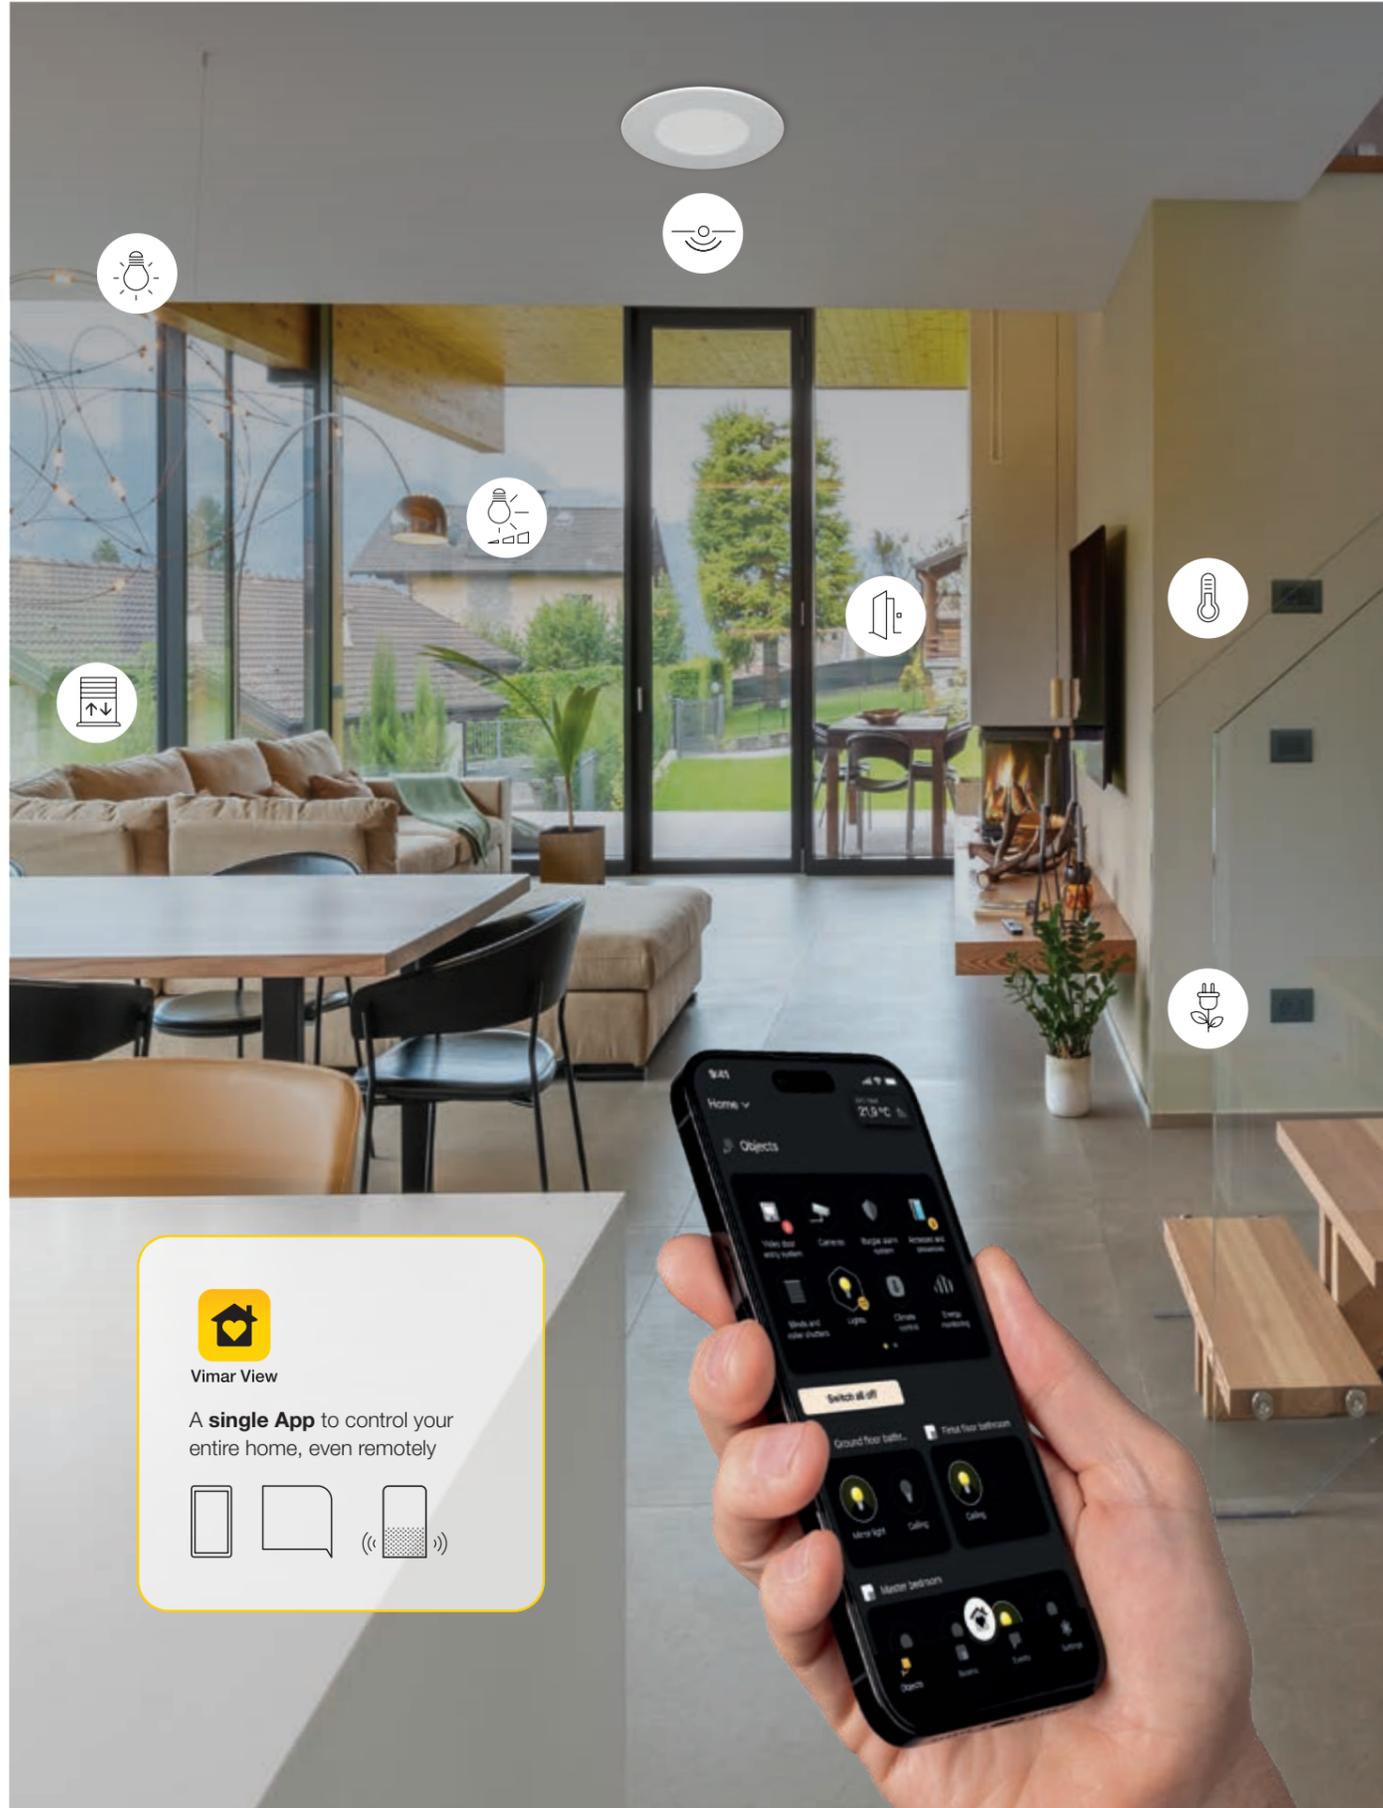

  
Vimar View

A **single App** to control your entire home, even remotely

## View Wireless **Smart Home:** make **your system** connected.

The View Wireless system makes it possible **to manage the temperature, lighting in various rooms, roller shutters or motorised blinds and to control accesses**, and it does so in a simple and safe way.

It can also be used to **monitor energy consumption, manage loads and set scenarios** with the utmost simplicity using **connected controls**, via **the View App** or directly **by voice**.

View Wireless is **ideal for refurbishments** or to **boost the functions of an existing system**. It is also a **useful support means** for the elderly and people with restricted mobility, who can manage their home automations with a simple click or by voice.



# View Wireless. A single system. Easy to programme.



View Wireless is the ideal solution to turn a traditional system into a connected one and is perfect when **renovating** an area of the home or an entire dwelling, store, restaurant, office and in those situations where **masonry work** and **repainting** tasks need to be kept to a minimum. A connected system gives you full control of your home.

Vimar has developed two different applications to programme and control your smart home: the **View Wireless App** enables the installer to programme the system from a tablet or smartphone, thanks to simple guided, user-friendly steps. Whereas using the **Vimar View App**, the user can have complete control of and interact with the devices and with the entire View Wireless system.



### For the installer.

The **View Wireless App** is available with a guided wizard. Configuration follows a sequential flow and is guided by simple explanatory screens to create environments and associate the connected devices; the parameter setting of individual devices (operation and backlighting); the transfer of settings and parameters to the gateway connected to the Wi-Fi network.

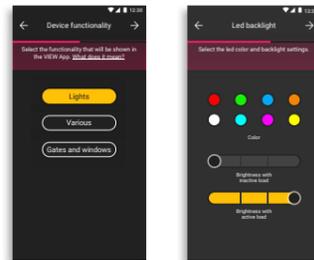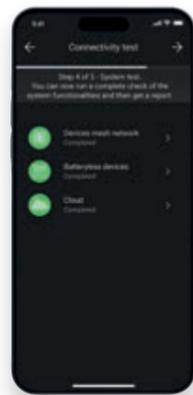

Easy to attribute the function to the device and to configure the colour and brightness of the LEDs.



### For the user.

Easy and user-friendly, designed for remote management of all the functions of the smart system. A single smart system for a future view. We offer you platforms and systems that are integrable to provide a concrete response to the needs of those who design and who live in the spaces of the future, in search of comfort and protection.



# Create or renovate your space simply.

Thanks to its **flexibility**, the View Wireless system is designed to adapt easily to any architectural context, offering **three different installation solutions**. This versatility allows you to select the most suitable option for the specific design and aesthetic requirements of each setting, guaranteeing functional integration at all times.

### SOLUTION FOR EXISTING SYSTEMS WITH CONNECTED CONTROLS

Making your system connected is quick and easy - simply replace traditional 1-way switches with new connected devices by Vimar and power them: 2-way switches, roller shutter and blind actuators, actuators for connected socket outlets, equipped with Bluetooth® and Zigbee® technology.



### SOLUTION FOR NEW OR EXISTING SYSTEMS WITH CONNECTED RETROFIT MODULES

For new systems or to facilitate the conversion of a traditional wiring system into a connected system, especially if fitted with push buttons and relays, retrofit **connected modules** are available for light and roller shutter relays. The connected modules can be retrofitted or installed in the junction box.



### SOLUTION FOR NEW SYSTEMS WITH THE USE OF CONNECTED DIN RAIL DEVICES

To accommodate various installation requirements, connected devices have been developed to be fitted onto DIN rails. They are ideal for controlling lights (ON/OFF and dimmable, from 0/1 V to 10 V), blinds/roller shutters, energy management and generic loads. They can be managed using connected controls or via smartphone with the Vimar View App.



# Dual intelligence, dual technology.

**INSTALLATION** **Bluetooth®**

The system functions can be boosted by adding radio controls that do not require an electrical power supply.

**Works with** **Apple HomeKit**

**Works with** **Hey Google**

**Works with** **IFTTT**

**So thanks to the Wi-Fi gateway, the Bluetooth® Mesh network and the Vimar View App, you can therefore:**

- remote control lights, roller shutters, energy consumption, temperature and accesses, and expand the system even with battery-free controls, which can be positioned freely throughout your home;
- control a socket outlet and measure the consumption of the connected load, receiving a notification if the threshold is exceeded;
- create scenarios and routines;
- control the system using voice controls (Amazon Alexa, Google Assistant and Siri).

**INSTALLATION** **zigbee**

**Works with** **Samsung SmartThings**

**The View Wireless configuration App can be used to:**


- change the protocol in favour of Zigbee, enabling the direct integration of devices with the Zigbee hub
- manage a smart basic ecosystem to control lights, roller shutters, temperature and energy management.

# New functions for even more comprehensive climate control.

New!

## Smart thermostat and thermostatic heads

The View Wireless system is expanding with important new features, particularly **concerning temperature control**. **The new connected thermostats, thermostatic heads, actuators and module** in fact also allow for remote temperature control, making it possible to turn the majority of systems - composed of radiators, underfloor heating or fan coils - into connected systems.

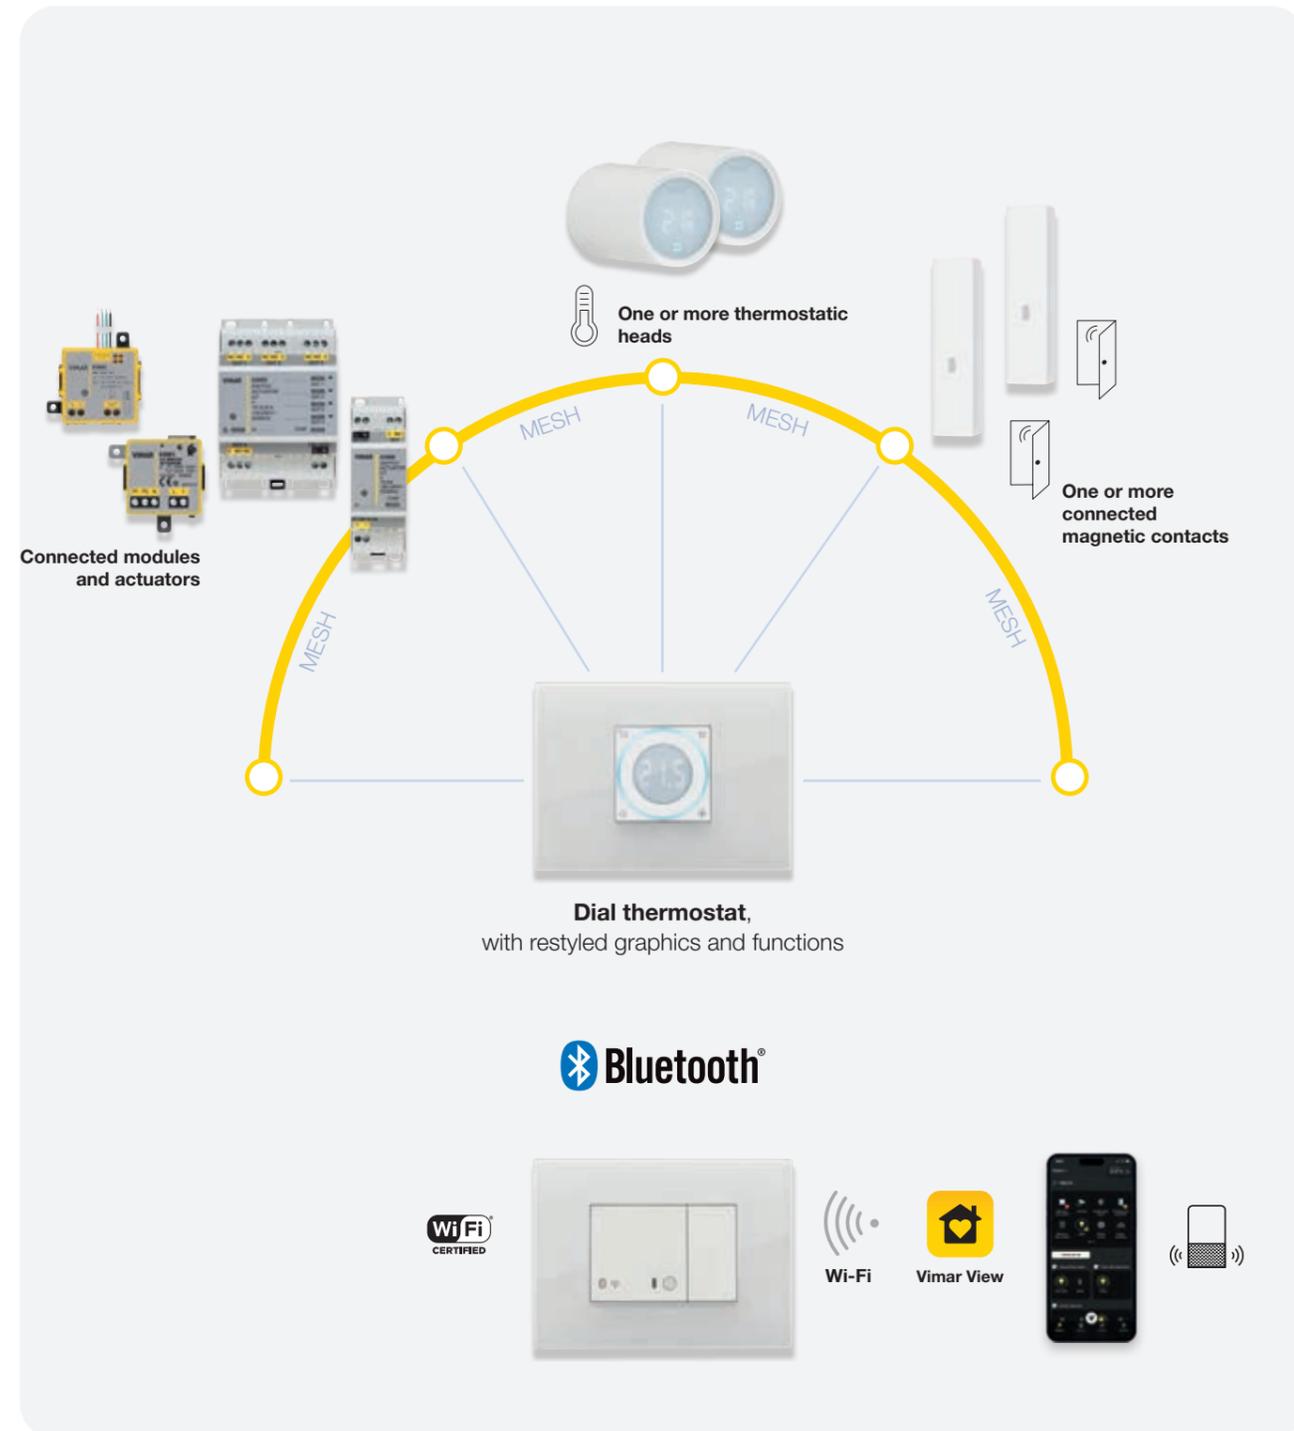

## New opportunities for temperature control.



Dial thermostat



Vimar View

Thermostatic Head

The **range of smart thermostats**, updated with **new functions and icons** (call up scenarios and fan coil speed) for even more user-friendly management, is **compatible with any** heating and cooling system. It is designed to control the temperature in every room independently, adapting to the specific needs of each environment. Thanks to the Vimar View App, **multiple thermostats** can easily be managed, even remotely. The system heats and cools only when necessary, following the rhythms and schedules of those who use the spaces, for optimal comfort and efficient energy use.

A **thermostatic head** is the **ideal solution for transforming even heating systems with radiators into smart systems**. It is designed to be installed as a replacement of conventional valves and allows you to modulate the hot water flow of an individual radiator based on the setpoint, which can be adjusted either locally on the head or remotely via a thermostat or using the Vimar View App. Indeed, the head can operate independently, replicating the functions of a timer-thermostat, or paired with a connected thermostat. This for instance enables it to manage a zone composed of multiple radiators (with one head per radiator) and a **"master" thermostat**.

APPLICATIONS

# Lighting management.




Widespread comfort.

With lighting management devices, you can **control the lights in every room** and **throughout the building based on the time of day**: you can **turn all the lights on and off simultaneously**, and **adjust the intensity, always creating the right atmosphere** in various settings. With a smart system, you can control all the motorised blinds and roller shutters in the building: save your favourite positions and raise or lower them at specific times according to sunlight for conscious energy management.



### Connected dimmers to adjust the light intensity

The connected dimmers supplement the range of the View Wireless system and manage home, office or hotel lighting in a smarter way, **to achieve the appropriate degree of lighting depending on the circumstances**. They can be **remote controlled by the user thanks to the View App, using your voice, with a tablet or video entryphone** with immediate **benefits to avoid energy wastage**.

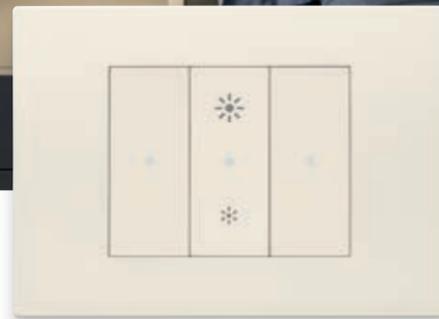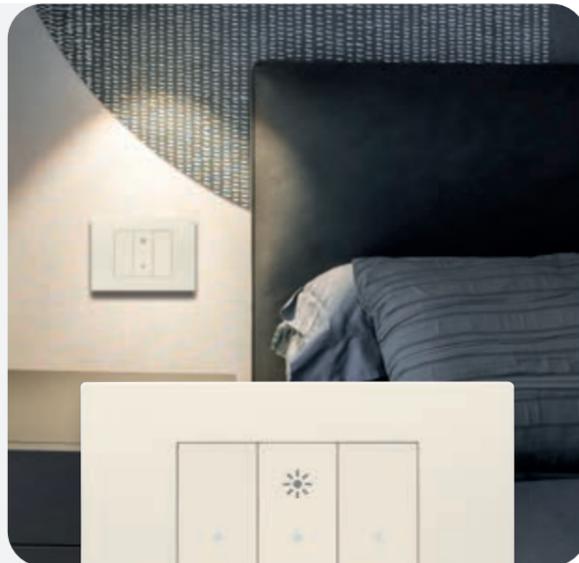

### Smart control of blinds and roller shutters

Open and close all the blinds or roller shutters in the building, even with your voice using voice assistants, the Vimar View App, a tablet, or a video entryphone. Remotely, even when you're away from home, you can lower sun awnings to avoid summer heat or simulate the opening and closing of roller blinds while on holiday.





APPLICATIONS

# Energy management.

For conscious consumption.

Smart thermostats **provide heating control and climate control for maximum comfort throughout your home**, as well as to avoid energy wastage. What's more, thanks to Vimar connected devices and the Vimar View App, **you can manage every single appliance and avoid black-outs** by making simple adjustments for conscious energy consumption. **From your smartphone, you can easily check the electricity consumption of your home, office or accommodation facility**;

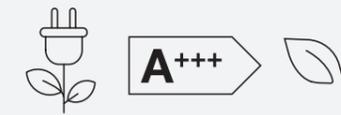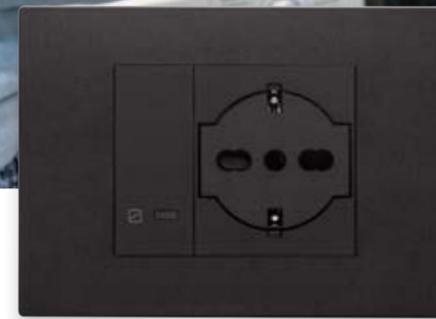

### No more power black-outs caused by overloads

By assigning priorities to different appliances, a smart home automatically deactivates non-essential devices and provides real-time alerts, **keeping you constantly informed about your energy usage**.

If a photovoltaic system is installed, **you can view the energy it produces** and **use it for your favourite appliances**.



### Magnetic contact for savings and safety

Consumption levels can also be optimised thanks to the connected magnetic contact, a device affording flexible installation which allows you to supervise entrances, send notifications, activate scenarios or suspend the temperature control system if an open window or door is detected.




APPLICATIONS

## Presence and access control.


Technology available to everyone.

A smart building is safer, and Vimar solutions **can be expanded over time based on the needs of the environment**. It's easy to integrate access management for hotels and offices, offering a user-friendly remote experience via tablet and smartphone through the View App, so you can always have every environment under supervision.

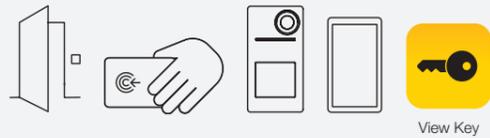

### Smart system for access control

Ideal for small and medium-sized accommodation facilities such as country guest houses and B&Bs, offering guests the very best in comfort and safety, guaranteeing the manager superior management performance and energy efficiency. With the new View Key App, your smartphone can become a key ring to access restricted areas using the Roxie entrance panel or the connected module (03983) and the connected landing card readers.

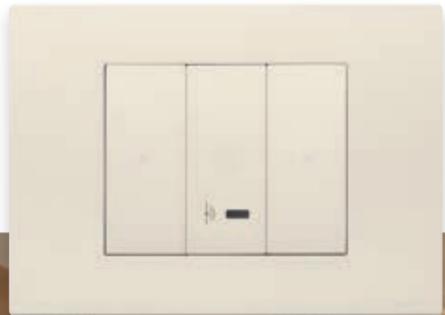

### Smart sensors for a space that's always under control

The UWB (Ultra Wide Band) presence detector automatically deactivates or activates everything and you can associate functions such as sanitising environments, or closing roller blinds when the presence of a person in the room is no longer detected.

APPLICATIONS

## Scenario management.


For a connected, safe and sustainable building.

The View Wireless system **offers the possibility of implementing up to 16 configurable scenarios**, allowing you to customise and automate the functions within an environment. This flexibility makes it possible to optimise comfort and energy efficiency, adapting the system to the customer's specific needs.



### Easy scenario set-up

It's easy to create your favourite scenarios to suit the needs of those who live in the space. Never again leave lights on or roller shutters open. Just call up the "going out" scenario from a control device, and several pre-defined functions will activate simultaneously: the burglar alarm system is armed, the roller shutters are closed, the lights are turned off, and the video surveillance cameras begin recording.

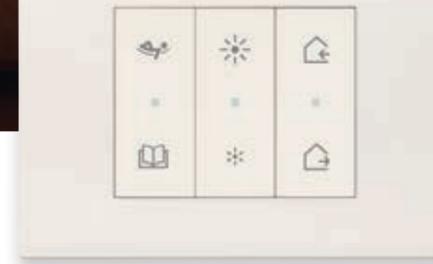

### User-friendly controls

Within the system, you can customise the buttons on the controls by choosing from a wide library of pictograms to identify the functions associated with each device.



## Everything is at your fingertips.

The user can manage, control and create favourite scenarios **using the View App**. Simply download it from the main stores, associate the Vimar gateway with the App and with the Wi-Fi network in the environment and become the system administrator.

### A SINGLE APP: EVEN MORE FUNCTIONS, EVEN SIMPLER.

- > Customise over time up to 16 scenarios, such as a single control to switch off all the lights and lower all the roller shutters at the same time.
- > Create up to 20 routines, containing a list of sequential actions (maximum 30) which are automatically carried out in the system, dependent upon a time or a frequency (weekly, monthly, annually or a customised period of time) and possibly with a pause in between (i.e. a wait, specified in minutes).
- > View and check the status of lights, roller shutters or sun awnings and of the loads connected to the socket outlets.
- > Programme and manage the ideal temperature in each room.
- > View the production of any photovoltaic systems, the total consumption of the home and of each connected socket outlet.
- > Receive notifications if the contractual power level is exceeded to avoid power outages and overloads.
- > Single App: the system is expandable since the **Vimar View** App is also designed to control the other Vimar alarm and video door entry systems (By-alarm Plus, Elvox Video door entry system).




Vimar View



## Everything is vocally controllable.

Controlling your home with your voice, using a vocal control or other smart speakers, makes technology accessible to everyone, including the elderly or the disabled, thanks to integration with Google Assistant, Amazon Alexa, Siri, Apple HomeKit, Samsung SmartThings platforms.

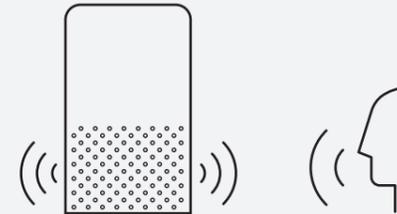

Raise the roller shutter in the bedroom



## Supervision with video entryphones and tablets.

The **Tab 5S Up** and **Tab 7S Up** hands-free video entryphones in the video door entry system are designed to **control functions (lights, blinds and roller shutters, sensors, scenarios, climate control, energy and access control) in the View Wireless connected system**, previously created and configured with the View Wireless App.

### FUNCTIONS WITH VIDEO ENTRYPHONES.

- > Import into Tab 7S Up and Tab 5S Up video door entryphones of the list of configurations and functions from the View Wireless system, via access to the Vimar cloud.
- > Management and control of functions from the video entryphone menu.
- > Scenario activation using the fast buttons on the front of the video entryphone or from the menu.
- > Possibility of expanding the View Wireless system, according to the user's needs.
- > Integrable in the system via the View Wireless App.



All the functions of the Vimar View App can also be managed from your iPad which thanks to the surface mounting frames (01430.xx) turn it into a system supervisor.



**Perfectly matching styling.**  
Seamless integration within settings.

**Simple, elegant and impeccable shapes.**

Five wiring series to connect to the building, to enjoy the positive energy of the home.

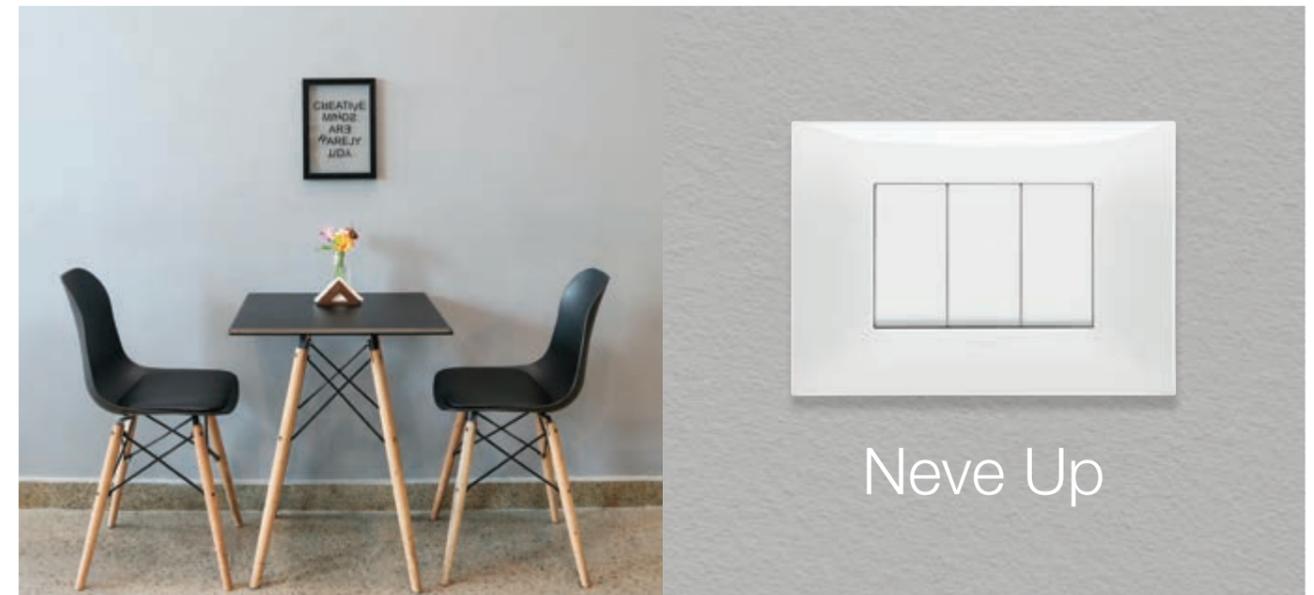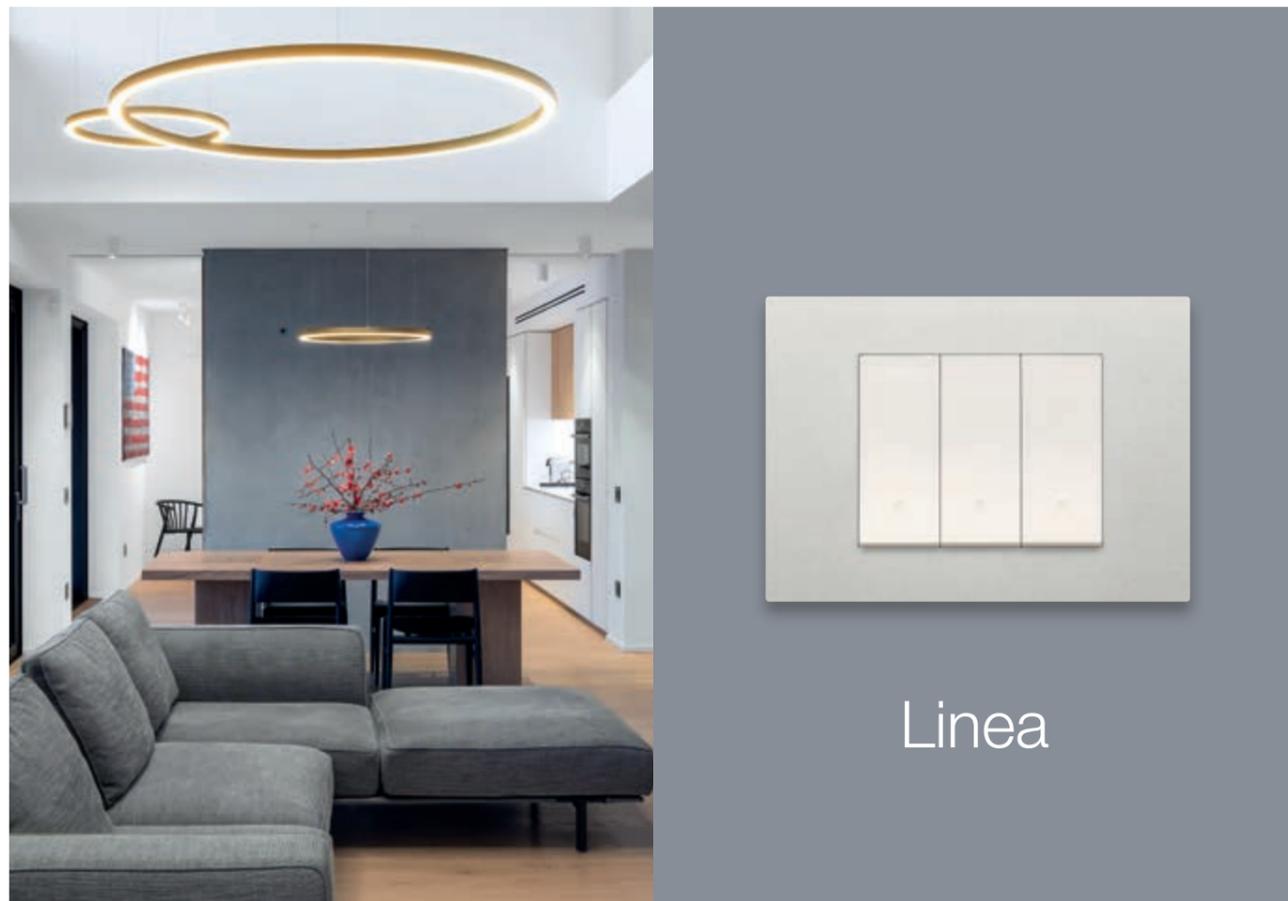

## Expand your system Stress-free and **wireless.**

Up to 2 battery-free radio frequency controls can be connected to the View Wireless system, via Bluetooth®, for each connected device (2-way switch, roller shutter actuator, socket outlet actuator, and retrofit actuator): this further boosts the functions of traditional systems.


- > **Versatile:** they can be fitted onto any surface, such as wood, glass and walls.
- > **Speedy installation:** no need for masonry work or repainting; no flush mounting boxes necessary.
- > **You can add or reposition** radio frequency controls for lights, scenarios, roller shutters, blinds and socket outlets at any time to suit your particular needs.



> **Move it** somewhere else if this is more convenient.




> **For all surfaces.**  
Apply it at any time onto any surface and in any point.

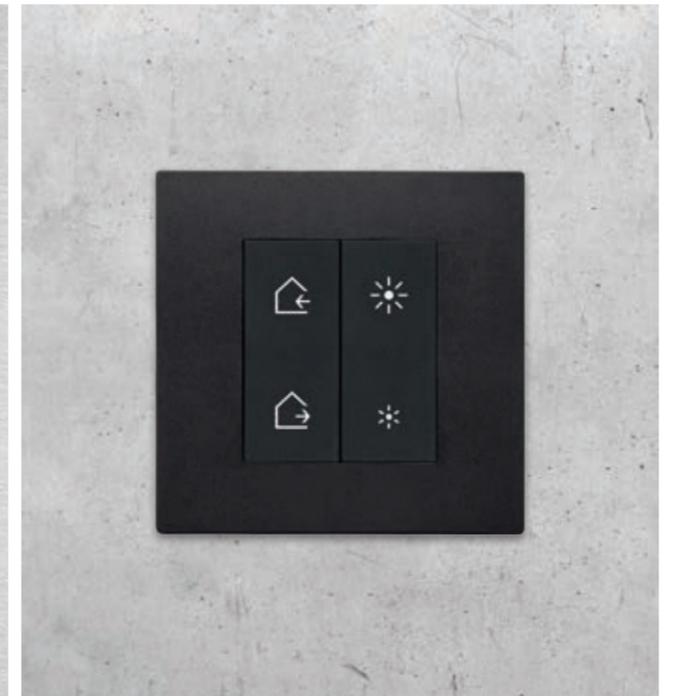

> **Wireless.**  
The controls send the signal to the connected device to which they are associated, exploiting the power supply provided by the built-in electro-dynamic generator.



> **Battery-free.**  
It is self-powered by the energy produced when pressing the buttons.

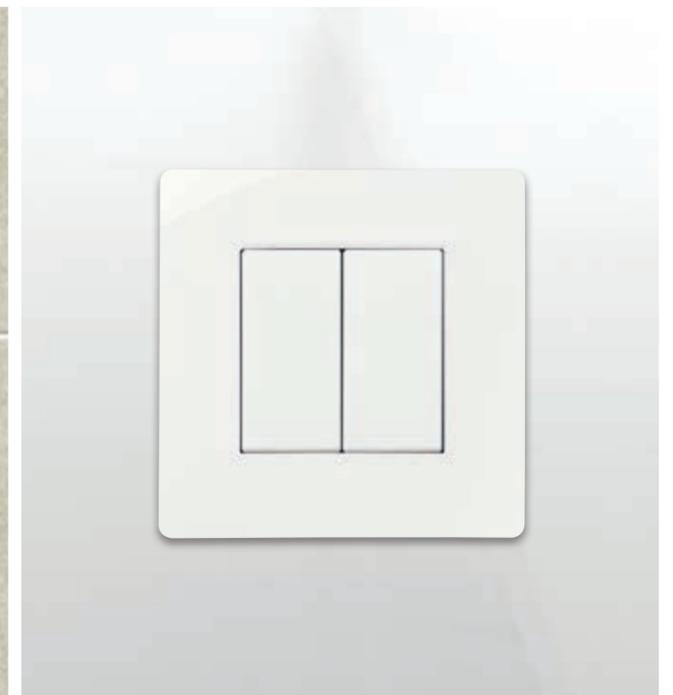

> **Even more functions.**  
Each control consists of 4 push buttons which can be configured individually or in pairs according to the features of the associated receivers.





## Attention to detail to give rise to bespoke projects.

### Customisable buttons, functions and cover plates.

To be clear on the function associated with the control, the buttons are also customisable with symbols (a broad range of pictograms is available, identifying the main functions of both traditional controls and smart controls). The LED backlighting, which is highly efficient and low consumption, can be customised both in terms of colours (RGB palette) and brightness on 4 different levels (for the visible in darkness function or load status signalling).

Moreover, the cover plates can be **customised** with your **logo**, which is useful for hotel or B&B systems.

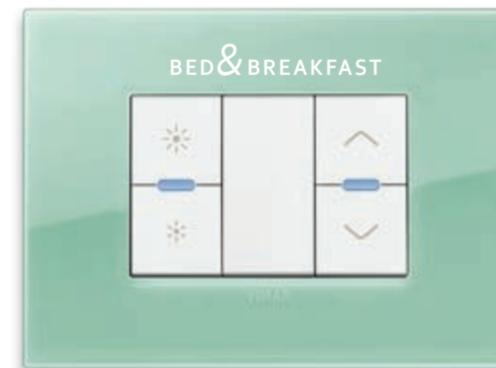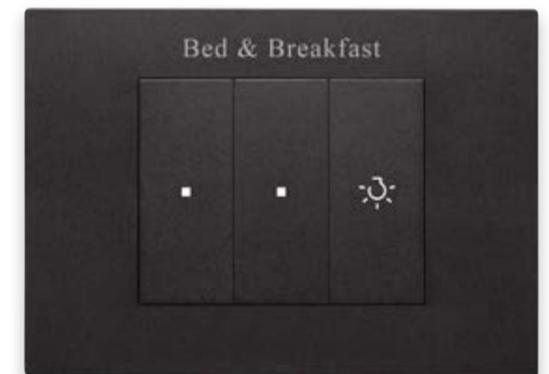

The View Wireless App **can be used to set the LED** backlighting, customising it both in terms of colours from the RGB range as well as brightness on 4 different levels.



View Wireless



# Index

---

**TYPICAL SYSTEMS**

from page 22

---

**DEVICES**


from page 26

Connected system.

The **Bluetooth® wireless technology** standard makes it possible to use devices in a mesh network, whereby the gateway is designed to allow the user **to control** the system **via the View App** both locally and remotely. Moreover, the system can also be controlled using Amazon Alexa, Google Assistant and Siri smart speakers and scenarios can be activated with the Tab 5S Up and Tab 7S Up video entryphones. The installer **configures** the system and sets all the parameters **using the View Wireless App**, which also allows the addition of battery-free remote controls, for the activation of scenarios or the addition of other control devices.


Representation of a residential system with connected devices to control lights, roller shutter, temperature, energy management and access control. Up to 64 devices can be connected, and up to 16 favourite scenarios can be set. Radio frequency devices can also be added to the system.

The wiring of connected devices requires a power supply (L, N) and connection to the related loads and/or electro-mechanical control devices (2-way switches, 1-way switches, push buttons). The presence of Wi-Fi Internet connection is always required, to allow the connection to the Cloud for supervision (local and remote) and for integrations with the Alexa, Google Assistant and Siri smart speakers. In addition, the system is compatible with IFTTT. By integrating IFTTT compatible third-party devices, recipes/applets can be created, involving climate control, the use of periodic timers, astronomical clocks, the weather and information about energy production or consumption. For instance, on reaching a specific internal temperature, you can turn on the air conditioning using a third-party interface, or turn on a light at sunset.

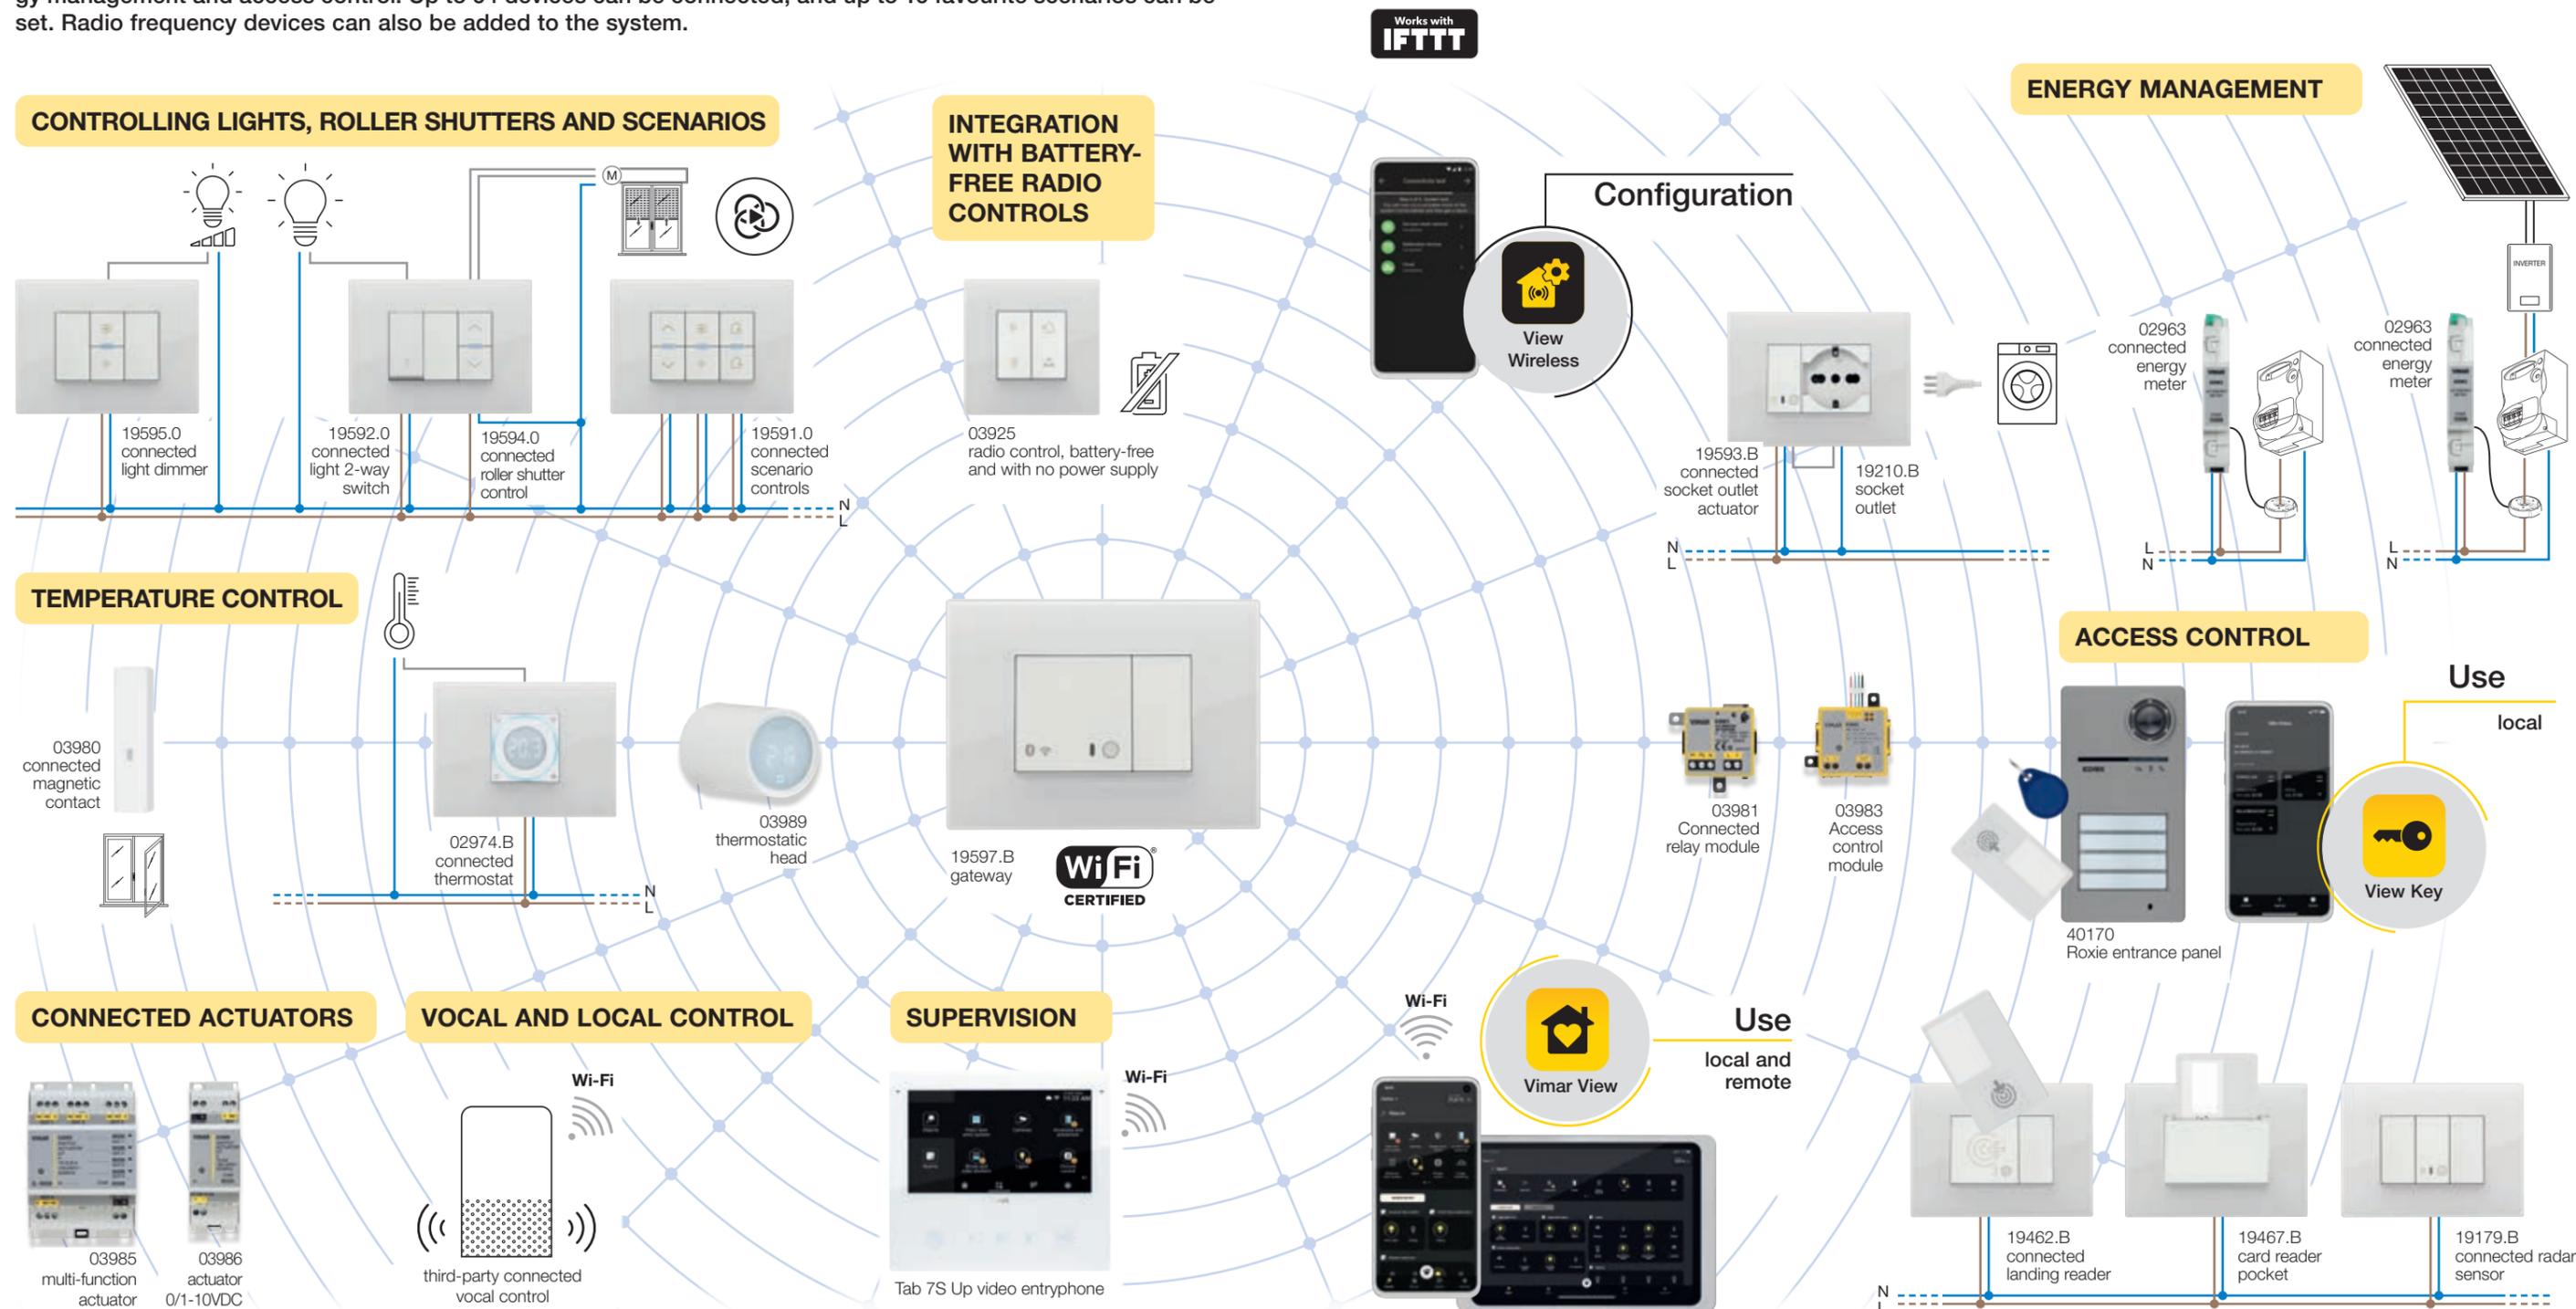


### Connected system based on App and Vimar cloud.

Connected system to control lights, roller shutters, temperature and energy management with flush mounting Wi-Fi gateway, supervision with **Vimar View** App and integration with radio frequency control with Bluetooth® Low Energy battery-free standard. Complete control with Siri, Amazon Alexa and Google Home through the Vimar Cloud and simplified configuration with the **View Wireless** App.

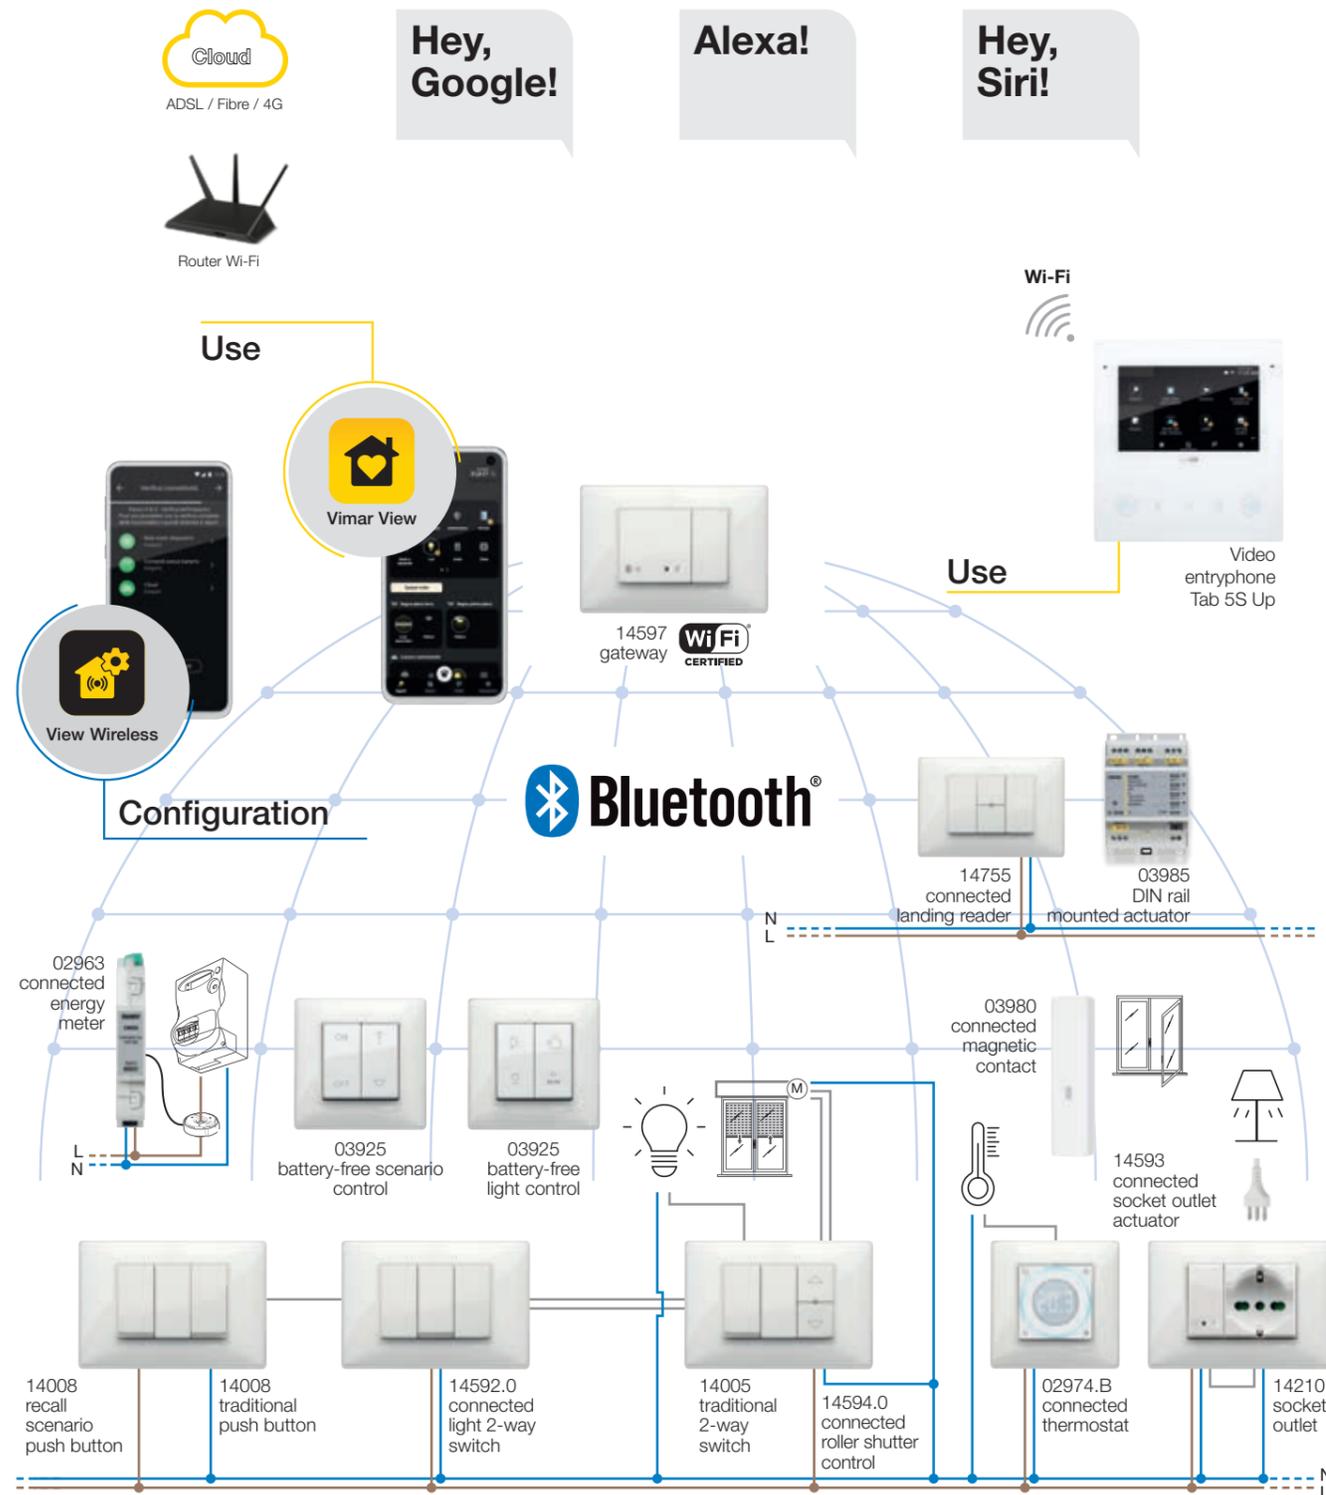

### Integration of the connected products in a smart ecosystem based on Zigbee hub, App and third-party cloud.

The **Zigbee technology** standard makes it possible to use devices directly in combination with a third-party Zigbee gateway, such as Amazon Echo or SmartThings Hub. The **View Wireless** App is only required to upload the Zigbee 3.0 protocol onto each individual connected device, guaranteeing use in a Smart Home without requiring additional gateways (the network HUB is Alexa or Samsung). The wiring of connected devices requires a power supply (L, N) and connection to the related loads and/or electro-mechanical control devices (2-way switches, 1-way switches, push buttons). The presence of Wi-Fi Internet connection is always required, to allow the connection to the Cloud for supervision (local and remote) and for integration with the voice controls.

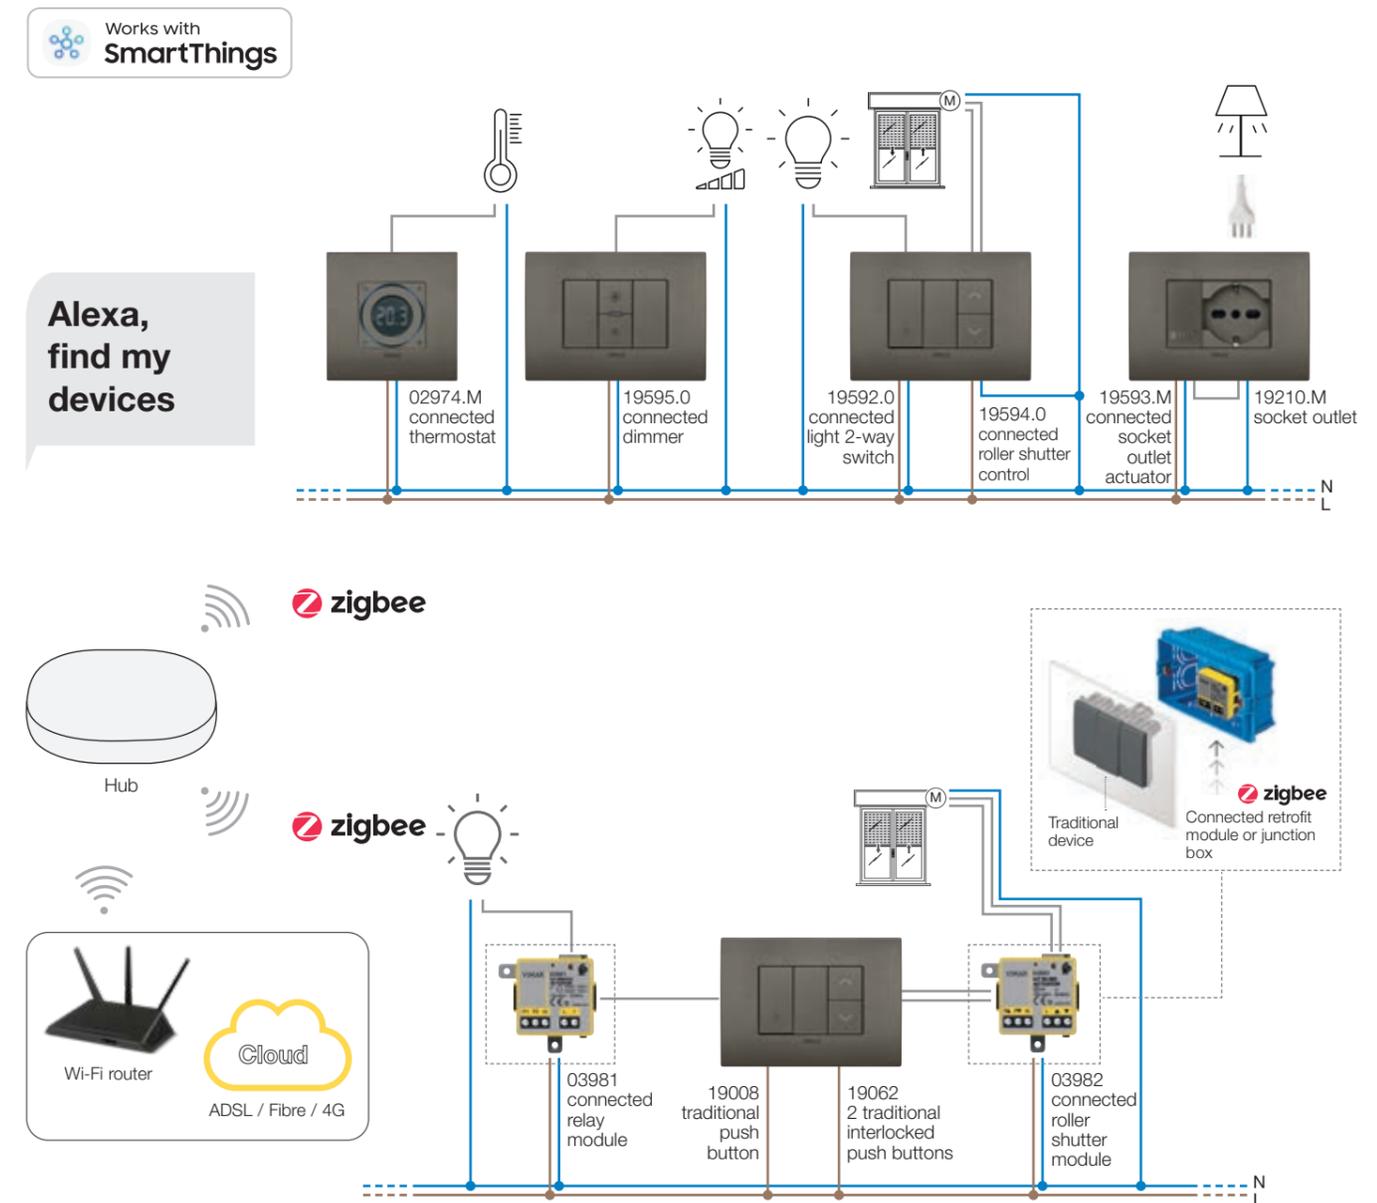

# VIEW WIRELESS

## Connected devices




EIKON	LINEA	ARKÉ	PLANA	NEVE UP
-------	-------	------	-------	---------

### Supervision



**40515**  
Wall-mounted Tab 5S Up hands-free video entryphone for Due Fili Plus system, integrated Wi-Fi for call forwarding to smartphone with dedicated App, with 5" touch-screen colour LCD display, capacitive keyboard for video door entry functions and intercom calls, video voicemail, teleloop for hearing aids, supervision of the View Wireless smart home automation system to control lights, roller shutters, sensors and scenarios, complete with bracket for fixing in round or rectangular mounting box, surface mounting or semi-flush mounting, white




**40515.04**  
Same as previous, black



**40517**  
Wall-mounted Tab 7S Up hands-free video entryphone for Due Fili Plus system, integrated Wi-Fi for call forwarding to smartphone with dedicated App, with 7" touch-screen colour LCD display, capacitive keyboard for video door entry functions and intercom calls, video voicemail, teleloop for hearing aids, supervision of the View Wireless smart home automation system to control lights, roller shutters, sensors and scenarios, complete with bracket for fixing in round or rectangular mounting box, surface mounting or semi-flush mounting, white



**40517.04**  
Same as previous, black

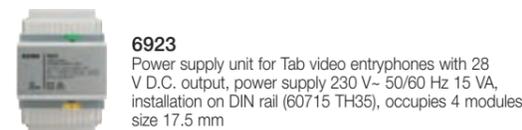

**6923**  
Power supply unit for Tab video entryphones with 28 V D.C. output, power supply 230 V- 50/60 Hz 15 VA, installation on DIN rail (60715 TH35), occupies 4 modules size 17.5 mm

With the **Vimar View** app (for the user) and the **View Wireless** app (for the installer) available on the Apple and Google Play stores.

### Mounting frames for iPads



**01430**  
Mounting frame for 10.9-11" iPad devices, comprising a decorative frame with surface mounting frame with wall plugs, supplied with type C USB cable and no power supply unit, black



**01430.B**  
Same as previous, white



**01430.N**  
Same as previous, Next

### Gateway with mounting frame for Neve Up



**0K14597.01**  
Wi-Fi Bluetooth® wireless technology gateway for integration, configuration and supervision of View Wireless system by Cloud and app for smartphone and tablet, 100-240 V 50/60 Hz power supply, on DIN (60715 TH35) rail installation, occupies 2 17,5 mm modules



# VIEW WIRELESS

## Connected devices



EIKON	LINEA	ARKÉ	PLANA	NEVE UP
-------	-------	------	-------	---------

### Gateway



**20597**  
View Wireless Gateway, Bluetooth® wireless technology 4.2 Wi-Fi, power supply 100-240 V 50/60 Hz, grey - 2 modules. Depth: 37 mm



**30807.G**  
View Wireless Gateway, Bluetooth® wireless technology 4.2 Wi-Fi, power supply 100-240 V 50/60 Hz, black - 2 modules. Depth: 38.8 mm



**19597**  
View Wireless Gateway, Bluetooth® wireless technology 4.2 Wi-Fi, power supply 100-240 V 50/60 Hz, grey - 2 modules. Depth: 36.7 mm



**14597**  
View Wireless Gateway, Bluetooth® wireless technology 4.2 Wi-Fi, power supply 100-240 V 50/60 Hz, white - 2 modules. Depth: 36 mm



**09597**  
View Wireless Gateway, Bluetooth® wireless technology 4.2 Wi-Fi, power supply 100-240 V 50/60 Hz, white - 2 modules. Depth: 37.2 mm



**20597.B**  
As above, white



**30807.B**  
As above, white



**19597.B**  
As above, white



**09597.CM**  
As above, Carbon Matt



**20597.N**  
As above, Next



**30807.C**  
As above, canvas



**19597.M**  
As above, Metal

### Connected 2-way switches



**20592.0**  
Mechanism, with 100-240 V 50/60 Hz relay output for 500 W incandescent lamps, 100W LED lamps, 250 VA electronic transformers, 120 W fluorescent lamps, local or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, 1 input for external button for actuator control or to recall a scenario. To be completed with 1, 2, or 3-module interchangeable buttons. Depth: 37.5 mm



**30802**  
Mechanism, with 100-240 V 50/60 Hz relay output for 500 W incandescent lamps, 100W LED lamps, 250 VA electronic transformers, 120 W fluorescent lamps, local or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, 1 input for external button for actuator control or to recall a scenario. To be completed with 1-module interchangeable buttons. Depth: 33.8 mm



**19592.0**  
Mechanism, with 100-240 V 50/60 Hz relay output for 500 W incandescent lamps, 100W LED lamps, 250 VA electronic transformers, 120 W fluorescent lamps, local or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, 1 input for external button for actuator control or to recall a scenario. To be completed with 1, 2, or 3-module interchangeable buttons. Depth: 36.5 mm



**14592.0**  
Mechanism, with 100-240 V 50/60 Hz relay output for 500 W incandescent lamps, 100W LED lamps, 250 VA electronic transformers, 120 W fluorescent lamps, local or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, 1 input for external button for actuator control or to recall a scenario. To be completed with 1, 2, or 3-module interchangeable buttons. Depth: 36.5 mm



**09592**  
View Wireless electronic 2-way switch, with 100-240 V 50/60 Hz relay output for 500 W incandescent lamps, 100W LED lamps, 250 VA electronic transformers, 120 W fluorescent lamps, local or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, 1 input for external button for actuator control or to recall a scenario, white. Depth: 37.9 mm



**09592.CM**  
As above, Carbon Matt

### Neve Up connected 2-module 2-way switches



**09592.2**  
View Wireless electronic 2-way switch, with 100-240 V 50/60 Hz relay output for 500 W incandescent lamps, 100W LED lamps, 250 VA electronic transformers, 120 W fluorescent lamps, local or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, 1 input for external button for actuator control or to recall a scenario, white. Depth: 37.9 mm



**09592.2.CM**  
View Wireless electronic 2-way switch, with 100-240 V 50/60 Hz relay output for 500 W incandescent lamps, 100W LED lamps, 250 VA electronic transformers, 120 W fluorescent lamps, local or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, 1 input for external button for actuator control or to recall a scenario, Carbon Matt. Depth: 37.9 mm

# VIEW WIRELESS

## Connected devices



### EIKON

1-module interchangeable buttons for connected 2-way switch (lightable)



2-module interchangeable buttons for connected 2-way switch (lightable)



3-module interchangeable buttons for connected 2-way switch (lightable)



# VIEW WIRELESS

## Connected devices



### LINEA

Aligned 1-module interchangeable buttons for connected 2-way switch (lightable)



Axial 1-module interchangeable buttons for connected 2-way switch (lightable)



# VIEW WIRELESS

## Connected devices



### ARKÉ

1-module interchangeable buttons for connected 2-way switch (lightable)



2-module interchangeable buttons for connected 2-way switch (lightable)



3-module interchangeable buttons for connected 2-way switch (lightable)



# VIEW WIRELESS

## Connected devices



### PLANA

1-module interchangeable buttons for connected 2-way switch (lightable)



2-module interchangeable buttons for connected 2-way switch (lightable)



3-module interchangeable buttons for connected 2-way switch (lightable)



# VIEW WIRELESS

## Connected devices



EIKON	LINEA	ARKÉ	PLANA	NEVE UP
-------	-------	------	-------	---------

### Connected controls for roller shutters



 <p><b>20594.0</b> Control device for 1 roller shutter with slat orientation and change-over relay output for cosφ 0.6 motor 2 A 100-240 V~ 50/60 Hz, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, 1 input for external push button to recall a scenario. To be completed with two 1-module interchangeable half-button caps. Depth: 37.5 mm</p>	 <p><b>30804</b> Control device for 1 roller shutter with slat orientation and change-over relay output for cosφ 0.6 motor 2 A 100-240 V~ 50/60 Hz, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, 1 input for external push button to recall a scenario. To be completed with two 1-module interchangeable half-button caps. Depth: 33.8 mm</p>	 <p><b>19594.0</b> Control device for 1 roller shutter with slat orientation and change-over relay output for cosφ 0.6 motor 2 A 100-240 V~ 50/60 Hz, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, 1 input for external push button to recall a scenario. To be completed with two 1-module interchangeable half-button caps. Depth: 36.5 mm</p>	 <p><b>14594.0</b> Control device for 1 roller shutter with slat orientation and change-over relay output for cosφ 0.6 motor 2 A 100-240 V~ 50/60 Hz, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, 1 input for external push button to recall a scenario. To be completed with two 1-module interchangeable half-button caps. Depth: 36.5 mm</p>	 <p><b>09594.0</b> Control device for 1 roller shutter with slat orientation and change-over relay output for cosφ 0.6 motor 2 A 100-240 V~ 50/60 Hz, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, 1 input for external push button to recall a scenario. To be completed with two 1-module interchangeable half-button caps. Depth: 37.9 mm</p>
--	---	---	---	---

### 1-module interchangeable buttons and half-button caps for connected controls

 <p><b>20755.2</b> Arrows symbol, grey</p>	 <p><b>31000A.FG</b> Arrows symbol, black</p>	 <p><b>19755.2</b> Arrows symbol, grey</p>	 <p><b>14755.2</b> Arrows symbol, white</p>	 <p><b>09755.2</b> Arrows symbol, white</p>
 <p><b>20755.2.B</b> Arrows symbol, white</p>	 <p><b>31000A.FB</b> Arrows symbol, white</p>	 <p><b>19755.2.B</b> Arrows symbol, white</p>	 <p><b>09755.2.SL</b> Arrows symbol, Carbon Matt</p>	
 <p><b>20755.2.N</b> Arrows symbol, Next</p>	 <p><b>31000A.FC</b> Arrows symbol, canvas</p>	 <p><b>19755.2.M</b> Arrows symbol, Metal</p>		

# VIEW WIRELESS

## Connected devices



EIKON	LINEA	ARKÉ	PLANA	NEVE UP
-------	-------	------	-------	---------

### Connected dimmers



 <p><b>20595.0</b> Dimmer mechanism for 20-200 W incandescent lamps, 2-200 W LED lamps, 20-200 W electronic transformers, Bluetooth® wireless technology 5.0 for View Wireless and mesh system and Zigbee 3.0, 1 input for external push button for dimmer control or to recall a scenario. To be completed with two 1-module interchangeable half-button caps. Depth: 37.5 mm</p>	 <p><b>30805</b> Dimmer mechanism for 20-200 W incandescent lamps, 2-200 W LED lamps, 20-200 W electronic transformers, Bluetooth® wireless technology 5.0 for View Wireless and mesh system and Zigbee 3.0, 1 input for external push button for dimmer control or to recall a scenario. To be completed with two 1-module interchangeable buttons. Depth: 39 mm</p>	 <p><b>19595.0</b> Dimmer mechanism for 20-200 W incandescent lamps, 2-200 W LED lamps, 20-200 W electronic transformers, Bluetooth® wireless technology 5.0 for View Wireless and mesh system and Zigbee 3.0, 1 input for external push button for dimmer control or to recall a scenario. To be completed with two 1-module interchangeable half-button caps. Depth: 36.5 mm</p>	 <p><b>14595.0</b> Dimmer mechanism for 20-200 W incandescent lamps, 2-200 W LED lamps, 20-200 W electronic transformers, Bluetooth® wireless technology 5.0 for View Wireless and mesh system and Zigbee 3.0, 1 input for external push button for dimmer control or to recall a scenario. To be completed with two 1-module interchangeable half-button caps. Depth: 36.5 mm</p>	 <p><b>09595.0</b> Dimmer mechanism for 20-200 W incandescent lamps, 2-200 W LED lamps, 20-200 W electronic transformers, Bluetooth® wireless technology 5.0 for View Wireless and mesh system and Zigbee 3.0, 1 input for external push button for dimmer control or to recall a scenario. To be completed with two 1-module interchangeable half-button caps. Depth: 37.8 mm</p>
				 <p><b>09595.0.120</b> Dimmer mechanism for 20-200 W incandescent lamps, 2-200 W LED lamps, 20-200 W electronic transformers, Bluetooth® wireless technology 5.0 for View Wireless and mesh system and Zigbee 3.0, 1 input for external push button for dimmer control or to recall a scenario. To be completed with two 1-module interchangeable half-button caps. Depth: 37.8 mm</p>

### 1-module interchangeable buttons and half-button caps for connected dimmers

 <p><b>20755.3</b> Dimmer symbol, grey</p>	 <p><b>31000A.RG</b> Dimmer symbols, black</p>	 <p><b>19755.3</b> Dimmer symbol, grey</p>	 <p><b>14755.3</b> Dimmer symbol, white</p>	 <p><b>14755.3</b> Dimmer symbol, white</p>
 <p><b>20755.3.B</b> Dimmer symbol, white</p>	 <p><b>31000A.RB</b> Dimmer symbols, white</p>	 <p><b>19755.3.B</b> Dimmer symbol, white</p>		 <p><b>14755.3.CM</b> Dimmer symbol, Carbon Matt</p>
 <p><b>20755.3.N</b> Dimmer symbol, Next</p>	 <p><b>31000A.RC</b> Dimmer symbols, canvas</p>	 <p><b>19755.3.M</b> Dimmer symbol, Metal</p>		

# VIEW WIRELESS

## Connected devices



EIKON	LINEA	ARKÉ	PLANA	NEVE UP
-------	-------	------	-------	---------

### Connected electronic controls

<b>20591.0</b> Control mechanism, local control with push button or remote control, IoT technology on Bluetooth® wireless technology 5.0 standard for View Wireless mesh system. To be completed with two 1-module interchangeable half-button caps. Depth: 37.5 mm	<b>30801</b> Control mechanism, local control with push button or remote control, IoT technology on Bluetooth® wireless technology 5.0 standard for View Wireless mesh system. To be completed with 1-module interchangeable buttons. Depth: 33.8 mm	<b>19591.0</b> Control mechanism, local control with push button or remote control, IoT technology on Bluetooth® wireless technology 5.0 standard for View Wireless mesh system. To be completed with two 1-module interchangeable half-button caps. Depth: 36.5 mm	<b>14591.0</b> Control mechanism, local control with push button or remote control, IoT technology on Bluetooth® wireless technology 5.0 standard for View Wireless mesh system. To be completed with two 1-module interchangeable half-button caps. Depth: 36.5 mm	<b>09591.0</b> Control mechanism, local control with push button or remote control, IoT technology on Bluetooth® wireless technology 5.0 standard for View Wireless mesh system. To be completed with two 1-module interchangeable half-button caps. Depth: 37.8 mm

### 1-module interchangeable buttons and half-button caps for connected electronic controls

<b>20755</b> Neutral, grey	<b>31000A.G</b> Neutral, black	<b>19755</b> Neutral, grey	<b>14755</b> Neutral, white	<b>09755</b> Neutral, white
<b>20755.B</b> Neutral, white	<b>31000A.B</b> Neutral, white	<b>19755.B</b> Neutral, white		<b>09755.CM</b> Neutral, Carbon Matt
<b>20755.N</b> Neutral, Next	<b>31000A.C</b> Neutral, canvas	<b>19755.M</b> Neutral, Metal		

# VIEW WIRELESS

## Connected devices



EIKON	LINEA	ARKÉ	PLANA	NEVE UP
-------	-------	------	-------	---------

### 1-module interchangeable buttons and half-button caps for connected electronic controls

<b>20755.2</b> Arrows symbol, grey	<b>31000A.FG</b> Arrows symbol, black	<b>19755.2</b> Arrows symbol, grey	<b>14755.2</b> Arrows symbol, white	<b>09755.2</b> Arrows symbol, white
<b>20755.2.B</b> Arrows symbol, white	<b>31000A.FB</b> Arrows symbol, white	<b>19755.2.B</b> Arrows symbol, white		<b>09755.2.CM</b> Arrows symbol, Carbon Matt
<b>20755.2.N</b> Arrows symbol, Next	<b>31000A.FC</b> Arrows symbol, canvas	<b>19755.2.M</b> Arrows symbol, Metal		
<b>20755.3</b> Dimmer symbol, grey	<b>31000A.RG</b> Dimmer symbols, black	<b>19755.3</b> Dimmer symbol, grey	<b>14755.3</b> Dimmer symbol, white	<b>09755.3</b> Dimmer symbol, white
<b>20755.3.B</b> Dimmer symbol, white	<b>31000A.RB</b> Dimmer symbols, white	<b>19755.3.B</b> Dimmer symbol, white		<b>09755.3.CM</b> Dimmer symbol, Carbon Matt
<b>20755.3.N</b> Dimmer symbol, Next	<b>31000A.RC</b> Dimmer symbols, canvas	<b>19755.3.B</b> Dimmer symbol, Metal		

# VIEW WIRELESS

## Connected devices



EIKON    LINEA    ARKÉ    PLANA    NEVE UP

1-module interchangeable buttons and half-button caps for connected electronic controls



**20755.6**  
Scenarios symbol, grey



**31000A.SG**  
Scenarios symbols, black



**19755.6**  
Scenarios symbol, grey



**14755.6**  
Scenarios symbol, white



**09755.6**  
Scenarios symbol, white



**20755.6.B**  
Scenarios symbol, white



**31000A.SB**  
Scenarios symbols, white



**19755.6.B**  
Scenarios symbol, white



**09755.6.CM**  
Scenarios symbol, Carbon Matt



**20755.6.N**  
Scenarios symbol, Next



**31000A.SC**  
Scenarios symbols, canvas



**19755.6.M**  
Scenarios symbol, Metal

# VIEW WIRELESS

## Connected devices



EIKON    LINEA    ARKÉ    PLANA    NEVE UP

Radio frequency control



**03925**  
Flat control with 4 push buttons, RF transmitter, 2.4 GHz, Bluetooth® Low Energy wireless technology standard, energy harvesting power supply provided by built-in electro-dynamic generator, to be completed with Eikon 20506 or 20506.2, Arké 19506 and 19506.2, Idea 16526 or 16526.2, Plana 14506 or 14506.2 buttons - 2 modules

Connected socket outlet actuators



**20593**  
Control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, function for measuring instant power and load cut-off threshold, grey. Depth: 39.5 mm



**30803.G**  
Control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, function for measuring instant power and load cut-off threshold, black. Depth: 42.8 mm



**19593**  
Control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, function for measuring instant power and load cut-off threshold, grey. Depth: 39 mm



**14593**  
Control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, function for measuring instant power and load cut-off threshold, white. Depth: 38.5 mm



**09593**  
Control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, function for measuring instant power and load cut-off threshold, white. Depth: 40 mm



**20593.B**  
As above, white



**30803.B**  
As above, white



**19593.B**  
As above, white



**14593.B**  
As above, white



**09593.CM**  
As above, Carbon Matt



**20593.N**  
As above, Next



**30803.C**  
As above, canvas



**19593.M**  
As above, Metal

# VIEW WIRELESS

## Connected devices



EIKON	LINEA	ARKÉ	PLANA	NEVE UP
-------	-------	------	-------	---------

### Connected retrofit actuator



**03981**  
Control device, with NO relay output 100-240 V 50/60 Hz for 500 W incandescent lamps, 100 W LED lamps, 250 VA electronic transformers, 120 W fluorescent lamps, remote control, 1 input for wired control to recall a scenario, Bluetooth® wireless technology for View Wireless mesh system and Zigbee 3.0, flush mounting (retrofit)



**03982**  
Control device for 1 roller shutter with slat orientation and change-over relay output for cosφ 0.6 motor 2 A 100-240 V~ 50/60 Hz, remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, flush mounting (retrofit)

### Connected retrofit actuator



**03983**  
Electronic module with 3 programmable digital inputs for potential-free contacts, 1 programmable NO/NC relay output for SELV voltage-free contact, IoT technology on Bluetooth 5.0 standard for the creation of View Wireless mesh system, 100-240 V 50/60 Hz power supply, flush mounting (retrofit)

### DIN rail mounted actuators



**03985**  
Electronic control actuator with 4 relay outputs 16 A 240 V~, programmable NO/NC with function to control lights, roller shutters with slat orientation, fan coil, climate control, accesses, sprinkler system, push buttons for local control, IoT technology on Bluetooth 5.0 standard for the creation of View Wireless mesh system and on Zigbee 3.0 standard, 100-240 V 50/60 Hz power supply, installation on DIN rail (60715 TH35), occupies 4 modules size 17.5 mm



**03986**  
VIEW Wireless electronic control actuator with 1 proportional analogue 0/1-10 V output with re-scalable voltage, 1 10 AX relay output 100-240 V~ 50/60 Hz, programmable NO/NC with function to control lights, fan coil, climate control, accesses, sprinkler system, push button for local control, IoT technology on Bluetooth 5.0 standard for the creation of View Wireless mesh system and on Zigbee 3.0 standard, 100-240 V 50/60 Hz power supply, installation on DIN rail (60715 TH35), occupies 2 modules size 17.5 mm

# VIEW WIRELESS

## Connected devices



EIKON	LINEA	ARKÉ	PLANA	NEVE UP
-------	-------	------	-------	---------

### Connected thermostats



**▲02974**  
Dial thermostat with relay output NO 5(2) A 240 V~, 3-speed and proportional fan coil control, IoT technology on Bluetooth technology 5.0 standard for the creation of View Wireless mesh system, 1 input for external temperature sensor, heating and air conditioning in ON/OFF and PID mode, class I temperature control device (contribution 1%) in ON/OFF mode, class IV (contribution 2%) in PID mode, white LED backlighting with brightness control, 100-240 V 50/60 Hz power supply - 2 modules. To be completed with Eikon, Arké, Plana cover plates. For Idea, can be installed using the dedicated mounting frame 16723. Depth: 28.5 mm



**▲02974.B**  
Same as previous, white



**▲02974.N**  
Same as previous, Next



**▲02974.M**  
Same as previous, Metal



**▲30811.G**  
Dial thermostat with relay output NO 5(2) A 240 V~, 3-speed and proportional fan coil control, IoT technology on Bluetooth technology 5.0 standard for the creation of View Wireless mesh system, 1 input for external temperature sensor, heating and air conditioning in ON/OFF and PID mode, class I temperature control device (contribution 1%) in ON/OFF mode, class IV (contribution 2%) in PID mode, white LED backlighting with brightness control, 100-240 V 50/60 Hz power supply - 2 modules. Depth: 31.8 mm



**▲30811.B**  
Same as previous, white



**▲30811.C**  
Same as previous, canvas



**▲09474**  
Dial thermostat with relay output NO 5(2) A 240 V~, 3-speed and proportional fan coil control, IoT technology on Bluetooth technology 5.0 standard for the creation of View Wireless mesh system, 1 input for external temperature sensor, heating and air conditioning in ON/OFF and PID mode, class I temperature control device (contribution 1%) in ON/OFF mode, class IV (contribution 2%) in PID mode, white LED backlighting with brightness control, 100-240 V 50/60 Hz power supply - 2 modules. Depth: 28.5 mm



**▲09474.CM**  
Same as previous, Carbon Matt

# VIEW WIRELESS

## Connected devices



EIKON    LINEA    ARKÉ    PLANA    NEVE UP

### Connected energy meter



**02963**  
Device for consumption meter/production of instantaneous electricity and consumption logs (with hourly, daily, monthly, annual resolution), 1 input for toroidal current sensor supplied, detectable power 25 W-100 kW, single-phase power supply 100-240 V 50/60 Hz, Bluetooth® wireless technology for View Wireless mesh system, occupies 1 module measuring 17.5 mm

### Connected magnetic contact



**03980**  
Magnetic contact for doors and windows, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 input for voltage-free contact, powered by AA LR6 1.5 V batteries (not supplied), white. For use as an accessory of the connected thermostat or, in combination with the IoT gateway, as a sensor for magnetic contact or voltage-free contact input opening/closing notifications

### Connected thermostatic head



▲ **03989**  
Thermostatic head, IoT technology, Bluetooth technology 5.0 standard for the creation of View Wireless mesh system, heating in PI mode, class IV temperature control device (contribution 2%), display with white LED backlighting, AA alkaline batteries (not rechargeable), installation on radiators equipped with flow control valves. Mechanical adaptors supplied for compatibility with the main valves: RA Danfoss, RAV Danfoss, RAVL, Danfoss, Giacomini, Caleffi, M28x1.5, FAR.

# VIEW WIRELESS

## Connected devices



EIKON    LINEA    ARKÉ    PLANA    NEVE UP

### Connected radar sensors



**20179**  
UWB radar sensor, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 solid state output for extra low voltage controls (SELV and non SELV), 1 input for external push button for output activation or to recall a scenario, 100-240 V 50/60 Hz power supply, grey. Depth: 40 mm



**30179.G**  
UWB radar sensor, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 solid state output for extra low voltage controls (SELV and non SELV), 1 input for external push button for output activation or to recall a scenario, 100-240 V 50/60 Hz power supply, black. Depth: 43.3 mm



**19179**  
UWB radar sensor, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 solid state output for extra low voltage controls (SELV and non SELV), 1 input for external push button for output activation or to recall a scenario, 100-240 V 50/60 Hz power supply, grey. Depth: 39.5 mm



**14179**  
UWB radar sensor, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 solid state output for extra low voltage controls (SELV and non SELV), 1 input for external push button for output activation or to recall a scenario, 100-240 V 50/60 Hz power supply, white. Depth: 39 mm



**09179**  
UWB radar sensor, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 solid state output for extra low voltage controls (SELV and non SELV), 1 input for external push button for output activation or to recall a scenario, 100-240 V 50/60 Hz power supply, white. Depth: 39.9 mm



**20179.B**  
As above, white



**30179.B**  
As above, white



**19179.B**  
As above, white



**09179.CM**  
As above, Carbon Matt



**20179.N**  
As above, Next



**30179.C**  
As above, canvas



**19179.M**  
As above, Metal

### Connected radar sensors



**02692**  
UWB radar sensor, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 solid state output for extra low voltage controls (SELV and non SELV), 1 input for external push button for output activation or to recall a scenario, 100-240 V 50/60 Hz power supply, false ceiling installation



**02692.S.1**  
Round section adaptor for ceiling installation of the IoT connected radar sensor 02692

# VIEW WIRELESS

## Connected devices



EIKON    LINEA    ARKÉ    PLANA    NEVE UP

Connected access control



**20462**  
NFC/RFID smart card landing reader, card configuration using View Wireless App, Bluetooth technology standard, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 DND input, LED with brightness control, 100-240 V~ 50/60 Hz power supply, grey - 2 modules.  
Depth: 32 mm



**30812.G**  
NFC/RFID smart card landing reader, card configuration using View Wireless App, Bluetooth technology standard, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 DND input, LED with brightness control, 100-240 V~ 50/60 Hz power supply, black - 2 modules.  
Depth: 33.8 mm



**19462**  
NFC/RFID smart card landing reader, card configuration using View Wireless App, Bluetooth technology standard, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 DND input, LED with brightness control, 100-240 V~ 50/60 Hz power supply, grey - 2 modules.  
Depth: 31.7 mm



**14462**  
NFC/RFID smart card landing reader, card configuration using View Wireless App, Bluetooth technology standard, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 DND input, LED with brightness control, 100-240 V~ 50/60 Hz power supply, white - 2 modules.  
Depth: 31 mm



**09462**  
NFC/RFID smart card landing reader, card configuration using View Wireless App, Bluetooth technology standard, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 DND input, LED with brightness control, 100-240 V~ 50/60 Hz power supply, white - 2 modules.  
Depth: 32.5 mm



**20462.B**  
As above, white



**30812.B**  
As above, white



**19462.B**  
As above, white



**09462.CM**  
As above, Carbon Matt



**20462.N**  
As above, Next



**30812.C**  
As above, canvas



**19462.M**  
As above, Metal



**20467**  
NFC/RFID smart card reader pocket for installation inside the room, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 configurable input, 100-240 V~ 50/60 Hz power supply, grey - 2 modules.  
Depth: 31 mm



**30813.G**  
NFC/RFID smart card reader pocket for installation inside the room, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 configurable input, 100-240 V~ 50/60 Hz power supply, black - 2 modules.  
Depth: 34.3 mm



**19467**  
NFC/RFID smart card reader pocket for installation inside the room, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 configurable input, 100-240 V~ 50/60 Hz power supply, grey - 2 modules.  
Depth: 31 mm




**14467**  
NFC/RFID smart card reader pocket for installation inside the room, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 configurable input, 100-240 V~ 50/60 Hz power supply, white - 2 modules.  
Depth: 31 mm



**09467**  
NFC/RFID smart card reader pocket for installation inside the room, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 configurable input, 100-240 V~ 50/60 Hz power supply, white - 2 modules.  
Depth: 32.5 mm



**20467.B**  
As above, white



**30813.B**  
As above, white



**19467.B**  
As above, white



**09467.CM**  
As above, Carbon Matt



**20467.N**  
As above, Next



**30813.C**  
As above, canvas



**19467.M**  
As above, Metal

# VIEW WIRELESS

## Connected devices



EIKON    LINEA    ARKÉ    PLANA    NEVE UP

Connected access control



**20467.C**  
Card holder cover for NFC/RFID reader pocket and badge switch, grey - 2 modules



**19467.C**  
Card holder cover for NFC/RFID reader pocket and badge switch, grey - 2 modules



**14467.C**  
Card holder cover for NFC/RFID reader pocket and badge switch, white - 2 modules



**09467.C**  
Card holder cover for NFC/RFID reader pocket and badge switch, white - 2 modules



**20467.C.B**  
As above, white



**19467.C.B**  
As above, white




**09467.C.CM**  
As above, Carbon Matt



**20467.C.N**  
As above, Next



**19467.C.M**  
As above, Metal



**01817**  
Mifare transponder card

# Opportunities for you

**We are a team of professionals** who provide expert support and customized global solutions for automating, connecting and monitoring the entire building while assuring total aesthetic coordination of all visible devices.


**vimar.com** - our on-line service platform, available 24/7. Vimar's know-how at your fingertips.

**Navigate the on-line catalogue**, a detailed database of all our codes with technical drawings, instruction sheets, and product photos.

Go to the **download section** and choose your language:

- **Dedicated catalogues** and **brochures** of our product range, systems and solutions.
- **Video** tutorial section, also available on You Tube channel.

From the homepage go to the **News** to keep yourself updated and to **References** to see our latest **Projects**.

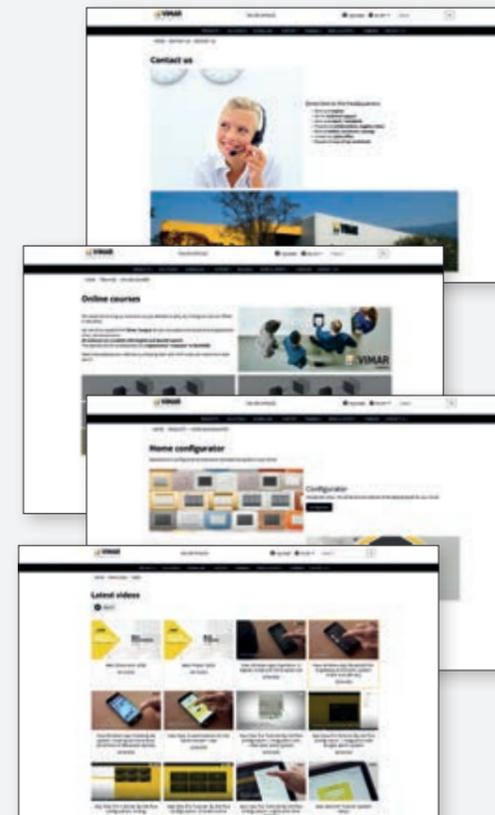

**Energia Positiva.** Insieme

