



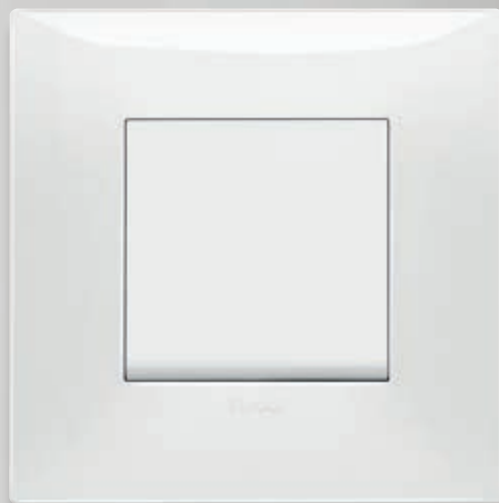

NEVE UP



**The smart choice.
It's now connected**

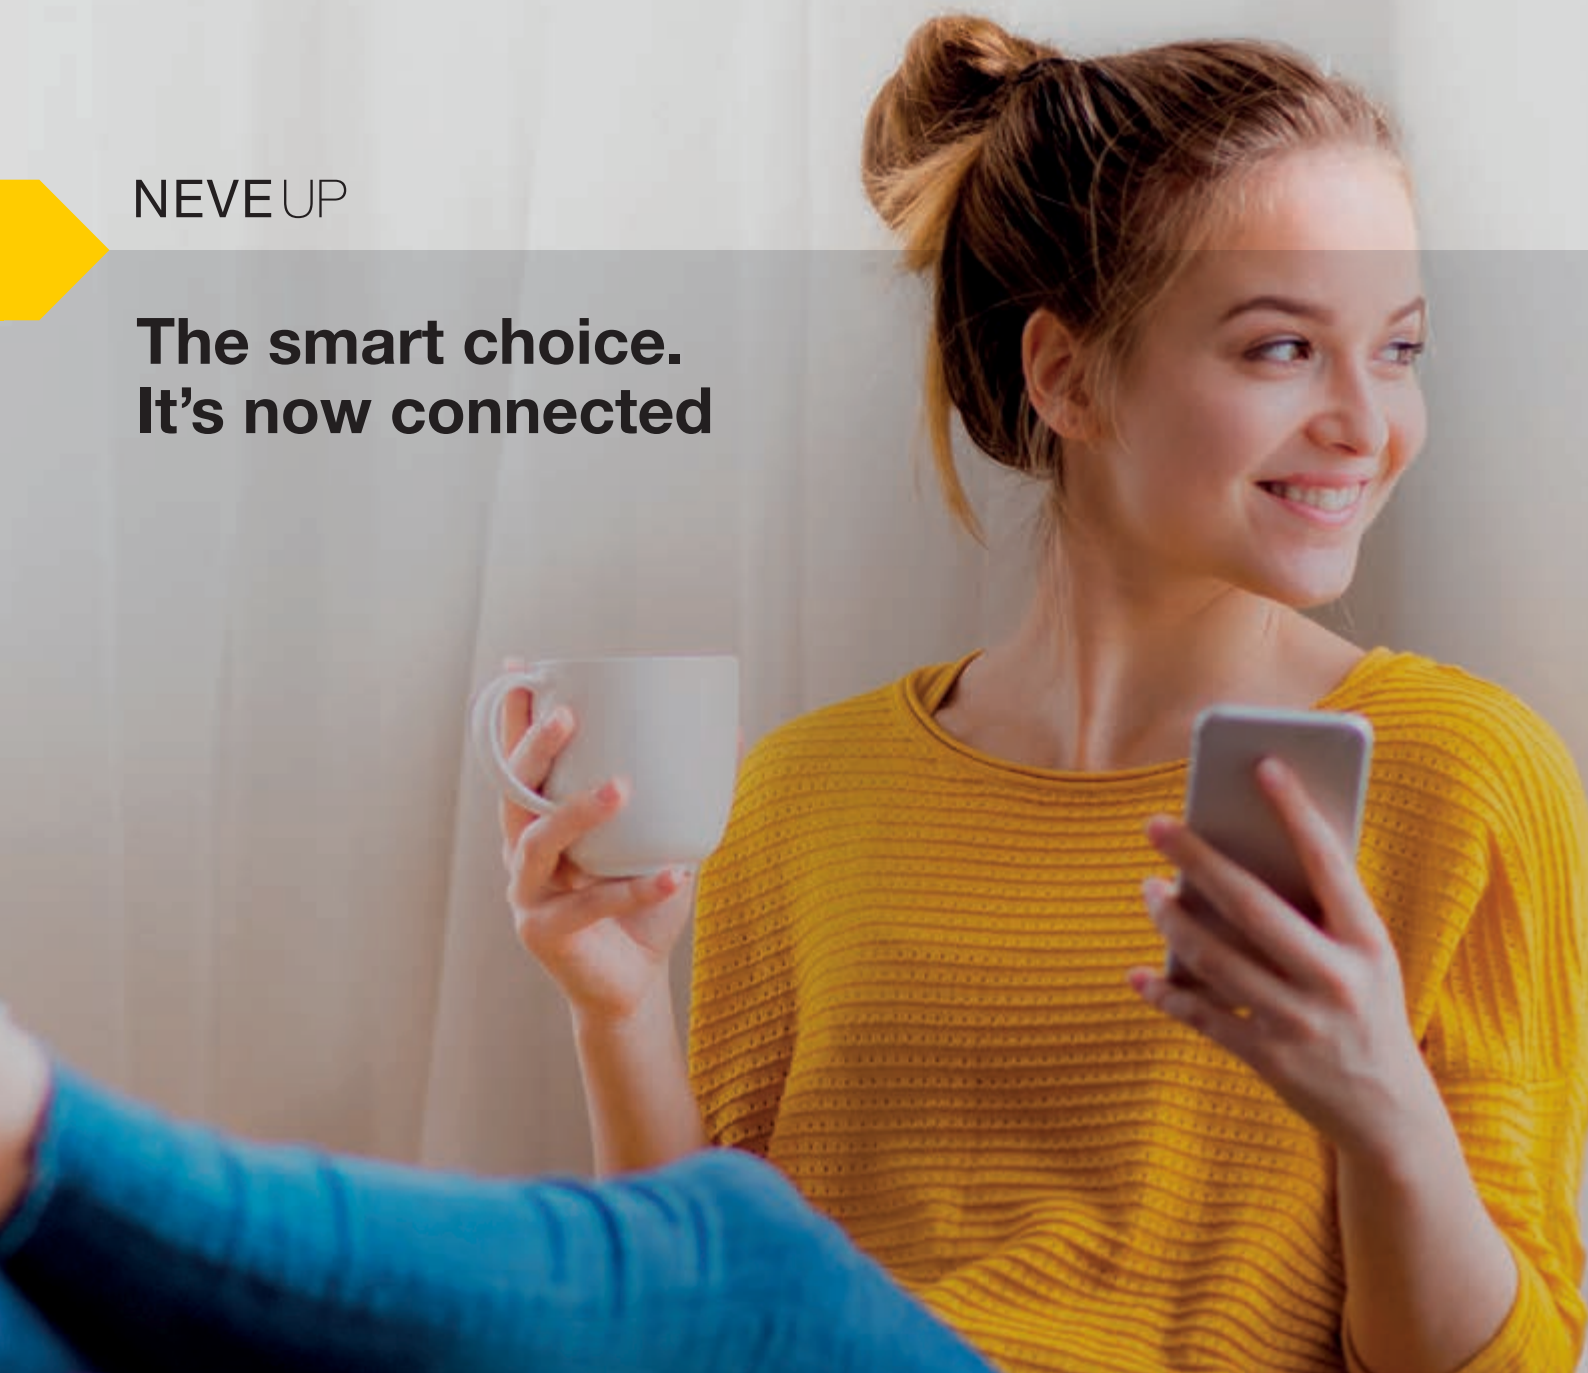

It's a
smart
choice!

NEVE UP.

A great choice for
any residential, hospitality
and office space.

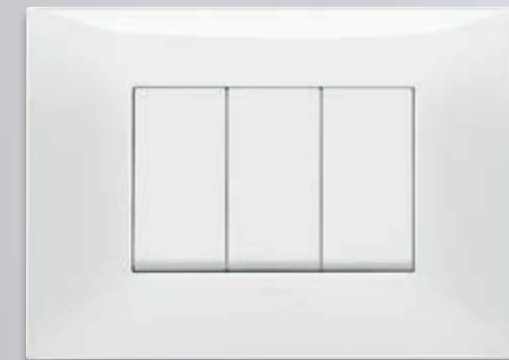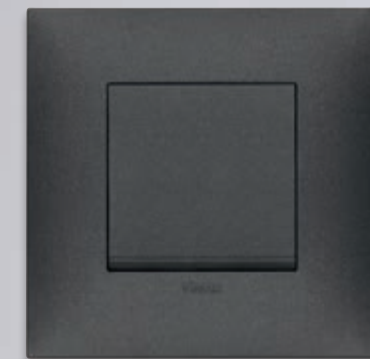


- > **Smart and connected.** Ideal for renovations, upgrades and new buildings 
- > Simple silhouettes, modern shape
- > Versatile and modular range
- > Easy and convenient solutions
- > Wide range of applications with new **IP55** and **IP40 mounting boxes** 
- > New opportunities. It's up to you!



NEVE UP. Smart and connected.

The View Wireless System.

The View Wireless system, thanks also to the **connected dimmers**, allows you to **manage room lighting, roller shutters or curtains** and **access control**, and does so more easily and safely with the **new presence detectors**. It also allows you to control **the temperature, monitor energy consumption, manage loads and set scenarios** with maximum simplicity **via the classic 1-way switches**, the **View app** or **directly with your voice**. View Wireless is **ideal in the event of renovations** or **to enhance the functions of an existing system**. It is also a **useful support means for the elderly** and for **people with restricted mobility**, thanks also to the **Assisted Living** function enabled by the radar sensors.

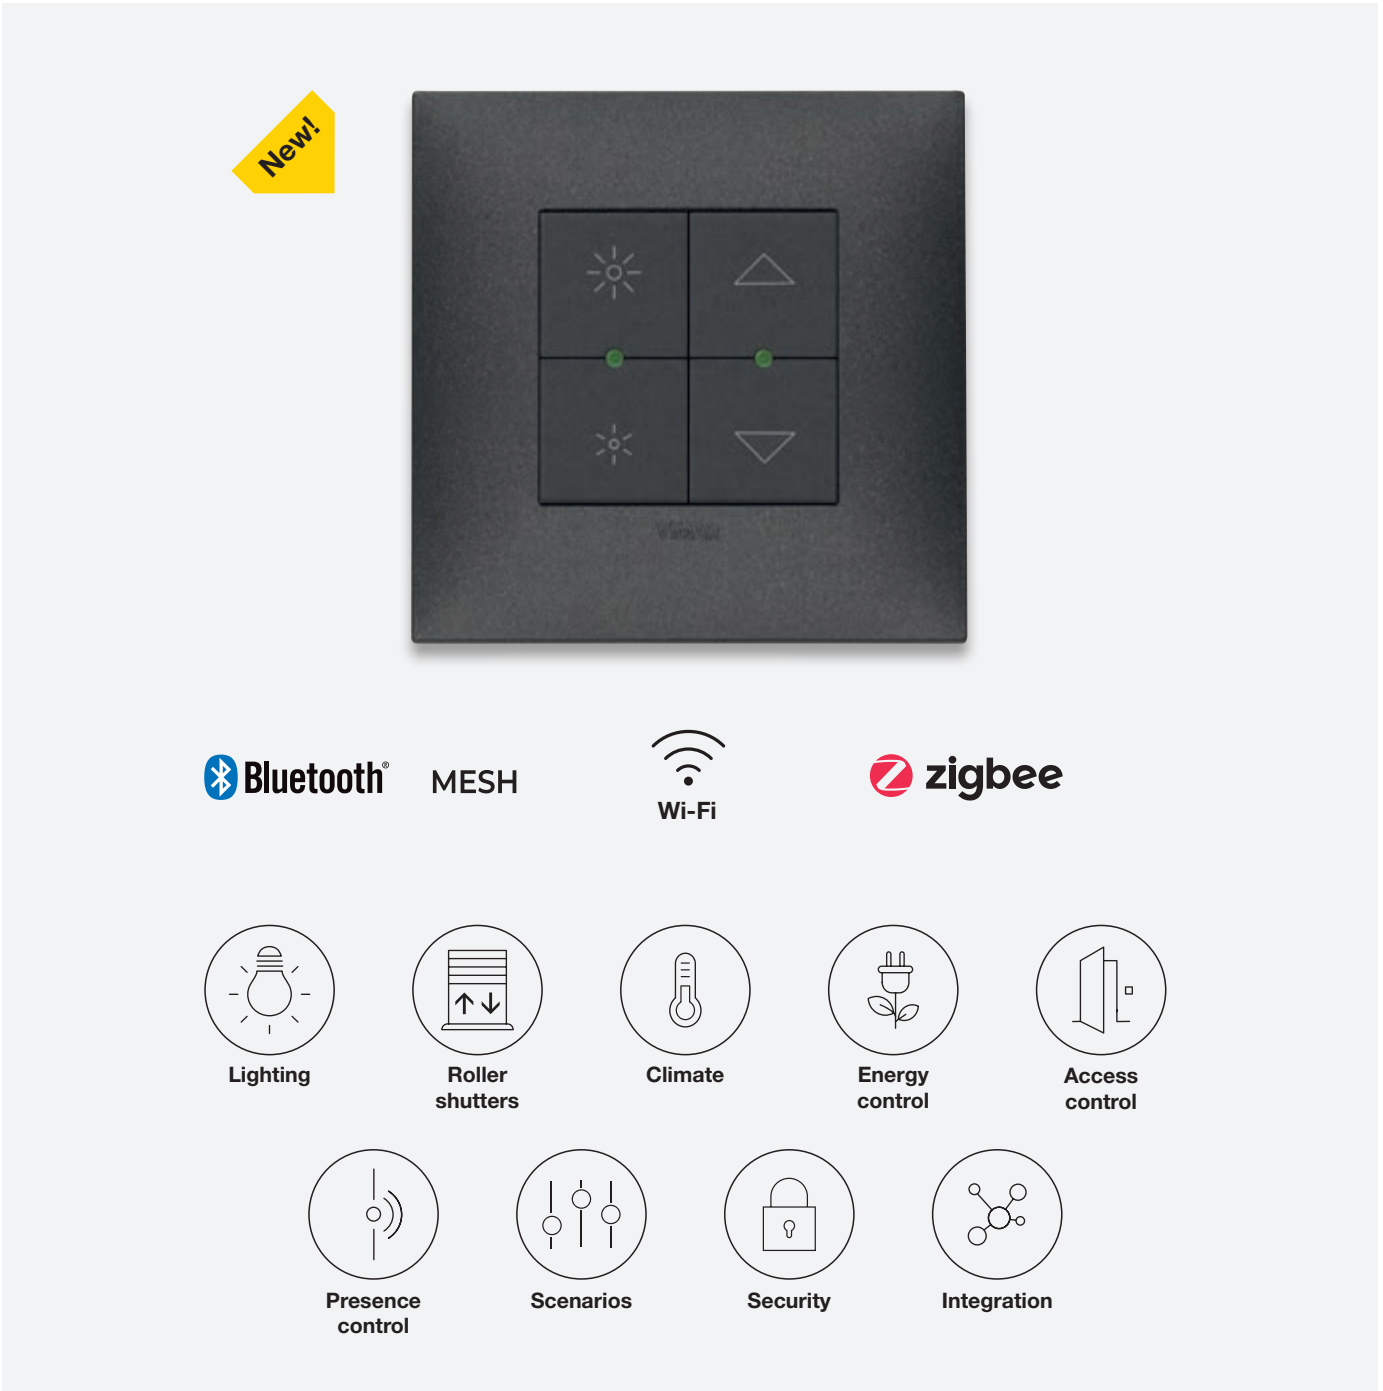

NEVE UP. It's now connected.

Easier and more functional.

Compared to a traditional system, the connected system makes it possible to have more functions **at hand**, or **vocally controllable**. A connected home thus guarantees **greater comfort**, **more efficiency** and **security** both when you are inside the environments as well as when you are out of doors, enhancing the value of the property and **improving life for its inhabitants**


THE CONVENIENCE OF CONTROL VIA APP.

To control the status of lights, the position of curtains and motorised roller shutters, as well as temperature, accesses and energy loads, wherever you may be.




THE OPPORTUNITY OF VOICE CONTROL.

Controlling your home with your voice makes technology accessible to everyone, including the elderly or the disabled.

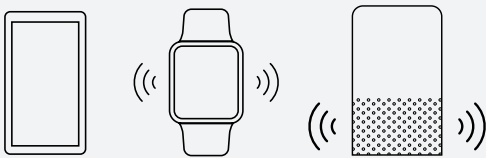


THE RELIABILITY OF A PHYSICAL DEVICE COMBINED WITH THE FREEDOM OF A WIRELESS ONE.

Pressing a 1-way switch expands your freedom thanks to the battery-free and wireless digital controls, which can be positioned and inserted in any environment and surface according to personal preference.

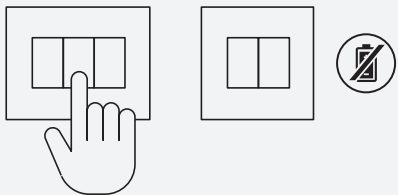


THE PERFECT SCENARIOS, WITH JUST ONE TOUCH.

The scenarios can be recalled through various devices: physical switch, via the View App and also via the Tab 5S Up and Tab 7S Up video entryphones.

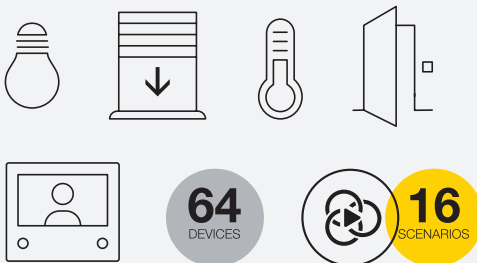

TEMPERATURE CONTROL, COMFORT AND ENERGY SAVING.

Smart thermostats to manage the heating and air conditioning for the maximum comfort of the entire home but also to avoid energy waste.




NEVE UP. It's now connected.

Smarter and easier control.

It's versatile to update, extend or replace the wiring system over time into a connected system, suitable for any architectural context. View Wireless is the ideal solution when **renovating** an area of the home or an entire dwelling, store, restaurant, office and in those situations where **masonry work** and repainting tasks **need to be kept to a minimum**.

SMART SYSTEM FOR ACCESS CONTROL.

Ideal for small and medium-sized facilities such as small hotels or B&Bs, it offers guests the best in terms of comfort and safety, guaranteeing the manager high management performance and energy efficiency. With the new View Key App, the smartphone can become a key ring to access restricted areas.

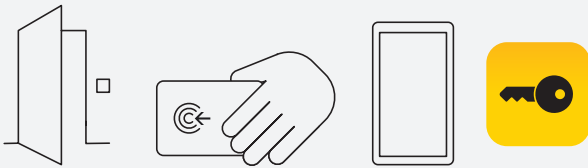


MONITORING CONSUMPTION TO PREVENT POWER OUTAGES.

Checking the electricity consumption of your entire home or of individual appliances from your smartphone, monitoring the production of the photovoltaic system. It's easy to control the single load thanks to the smart actuator for measuring the instant power and load cut-off threshold.



ALWAYS THE RIGHT SETTING LIGHTING TO AVOID ENERGY WASTAGE.

Thanks to the connected dimmers, installed at home, in the office or a hotel, you can manage your lighting in a smarter way: you obtain the appropriate degree of lighting depending on the circumstances, avoid energy wastage and make lighting management of all settings simpler and more convenient, while being aware of correct energy usage.



EASIER TO MANAGE ACCOMMODATION FACILITY FOR THE GUESTS IN HOTELS AND OFFICES.

Thanks to the mounting sensor with Ultra Wide Band radar technology, it's possible to measure micro-movements of the body with the utmost precision to detect the presence of a person in a room and match scenarios: turn on the light or activate the temperature control.



ASSISTED LIVING.


The ceiling radar sensor is able to measure an accidental fall within the detection range and send a notification alert to the smartphone of a person capable of providing assistance or activate a scenario.




NEVE UP. Discover View Wireless.

Update your living spaces with ease.

View Wireless is the ideal solution for turning a traditional system into a connected one. **Reduce masonry and repainting.** Full control of the home is possible.

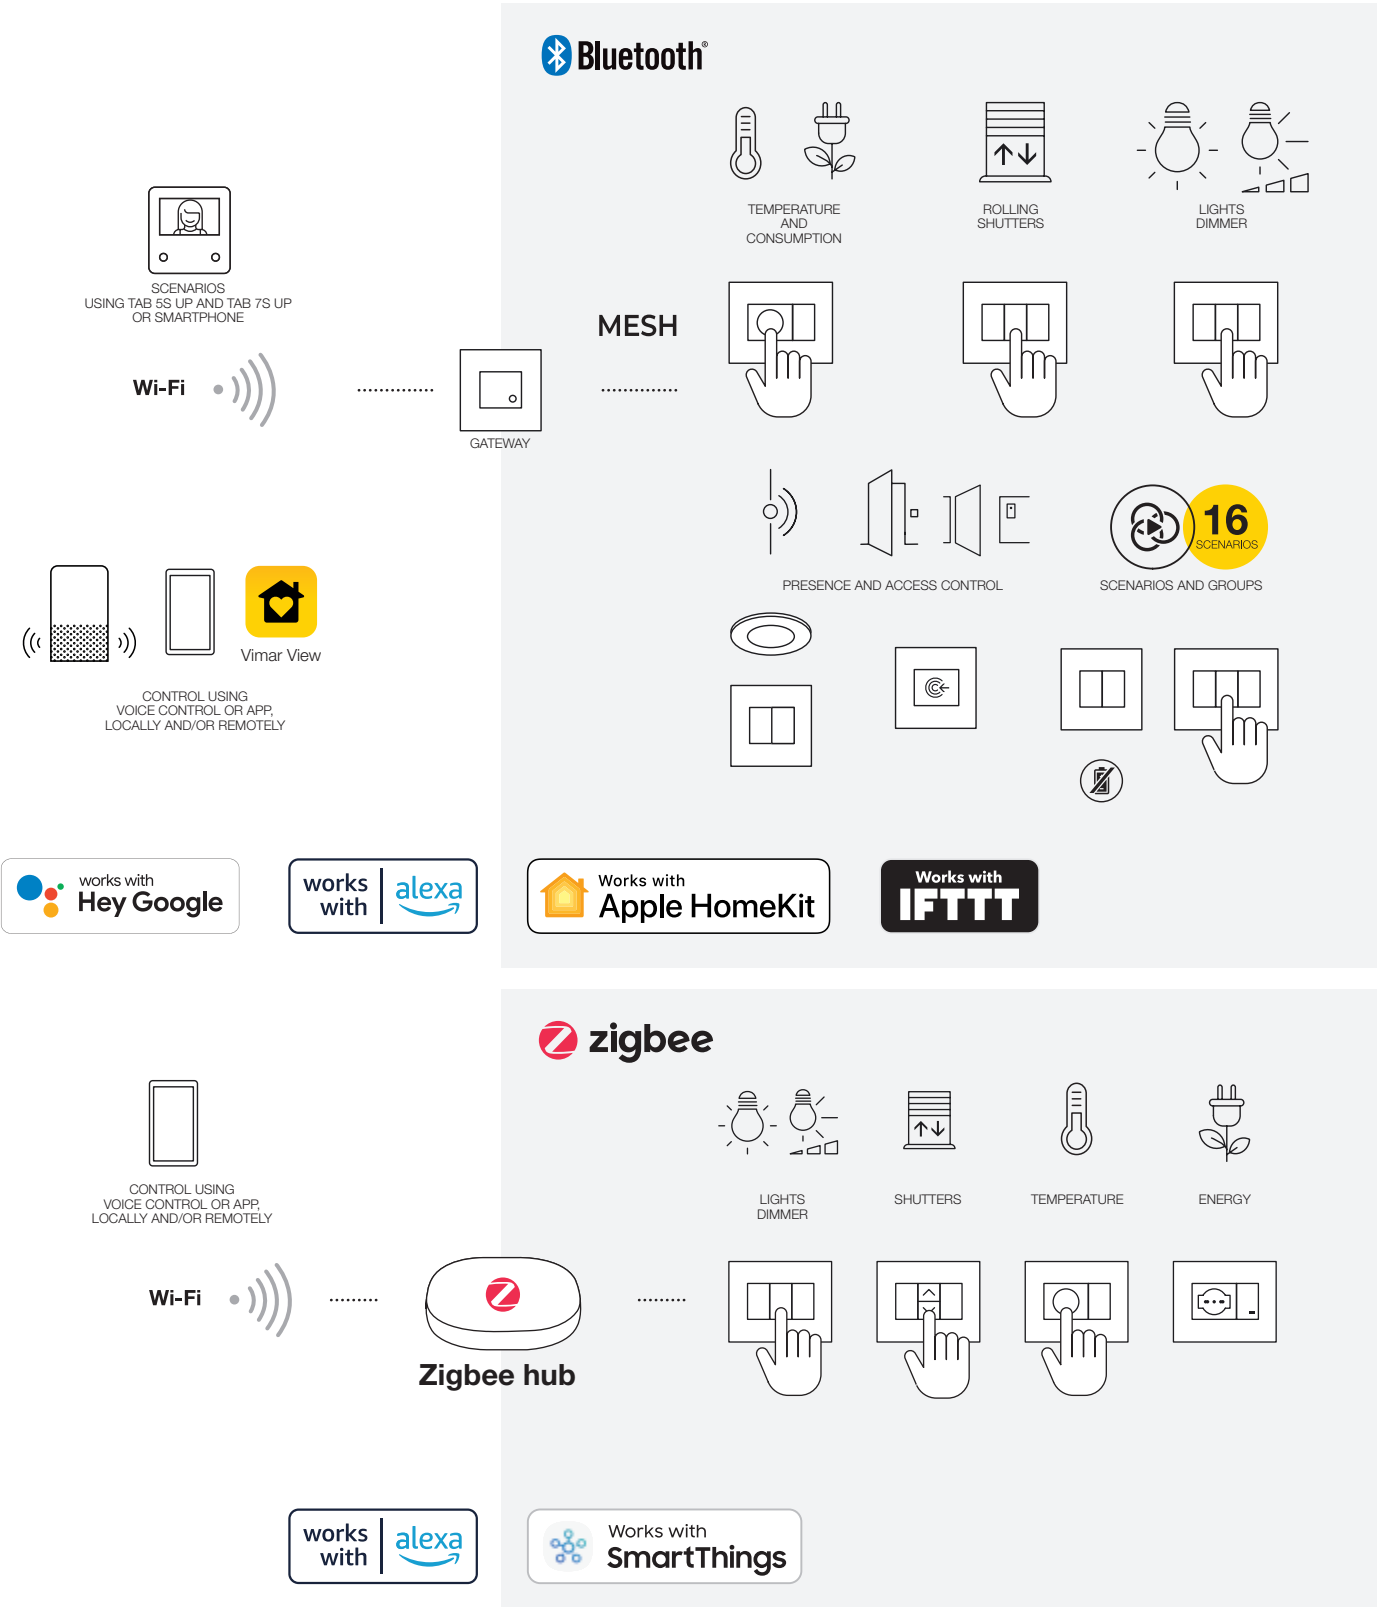


Your installation is easy to fit. Simply replace the traditional devices in the existing system with the connected devices and power them: switches, actuators for roller shutters and curtains, actuators for connected socket outlets, equipped with Bluetooth® and Zigbee® technology.

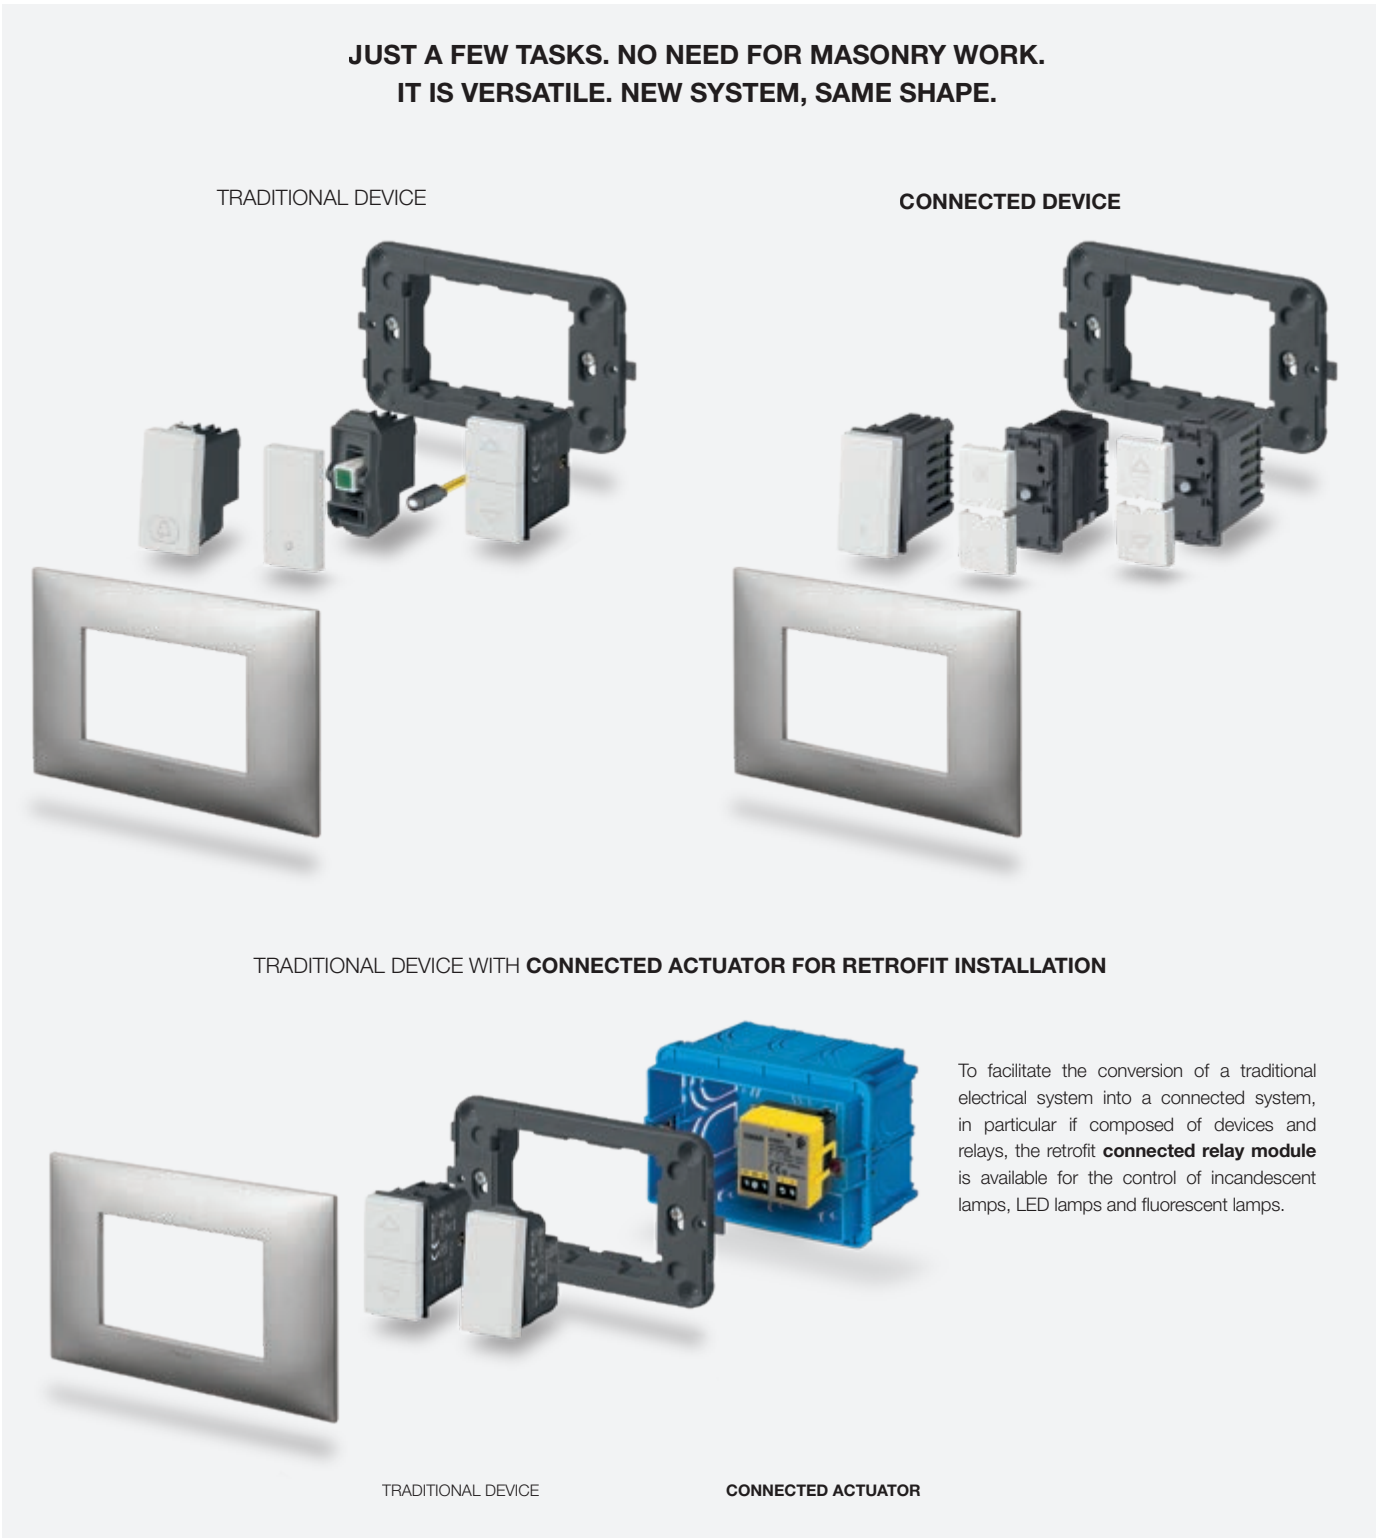



NEVE UP. A new recognizable design
to guarantee full functionality, quality, security
and easy installation.

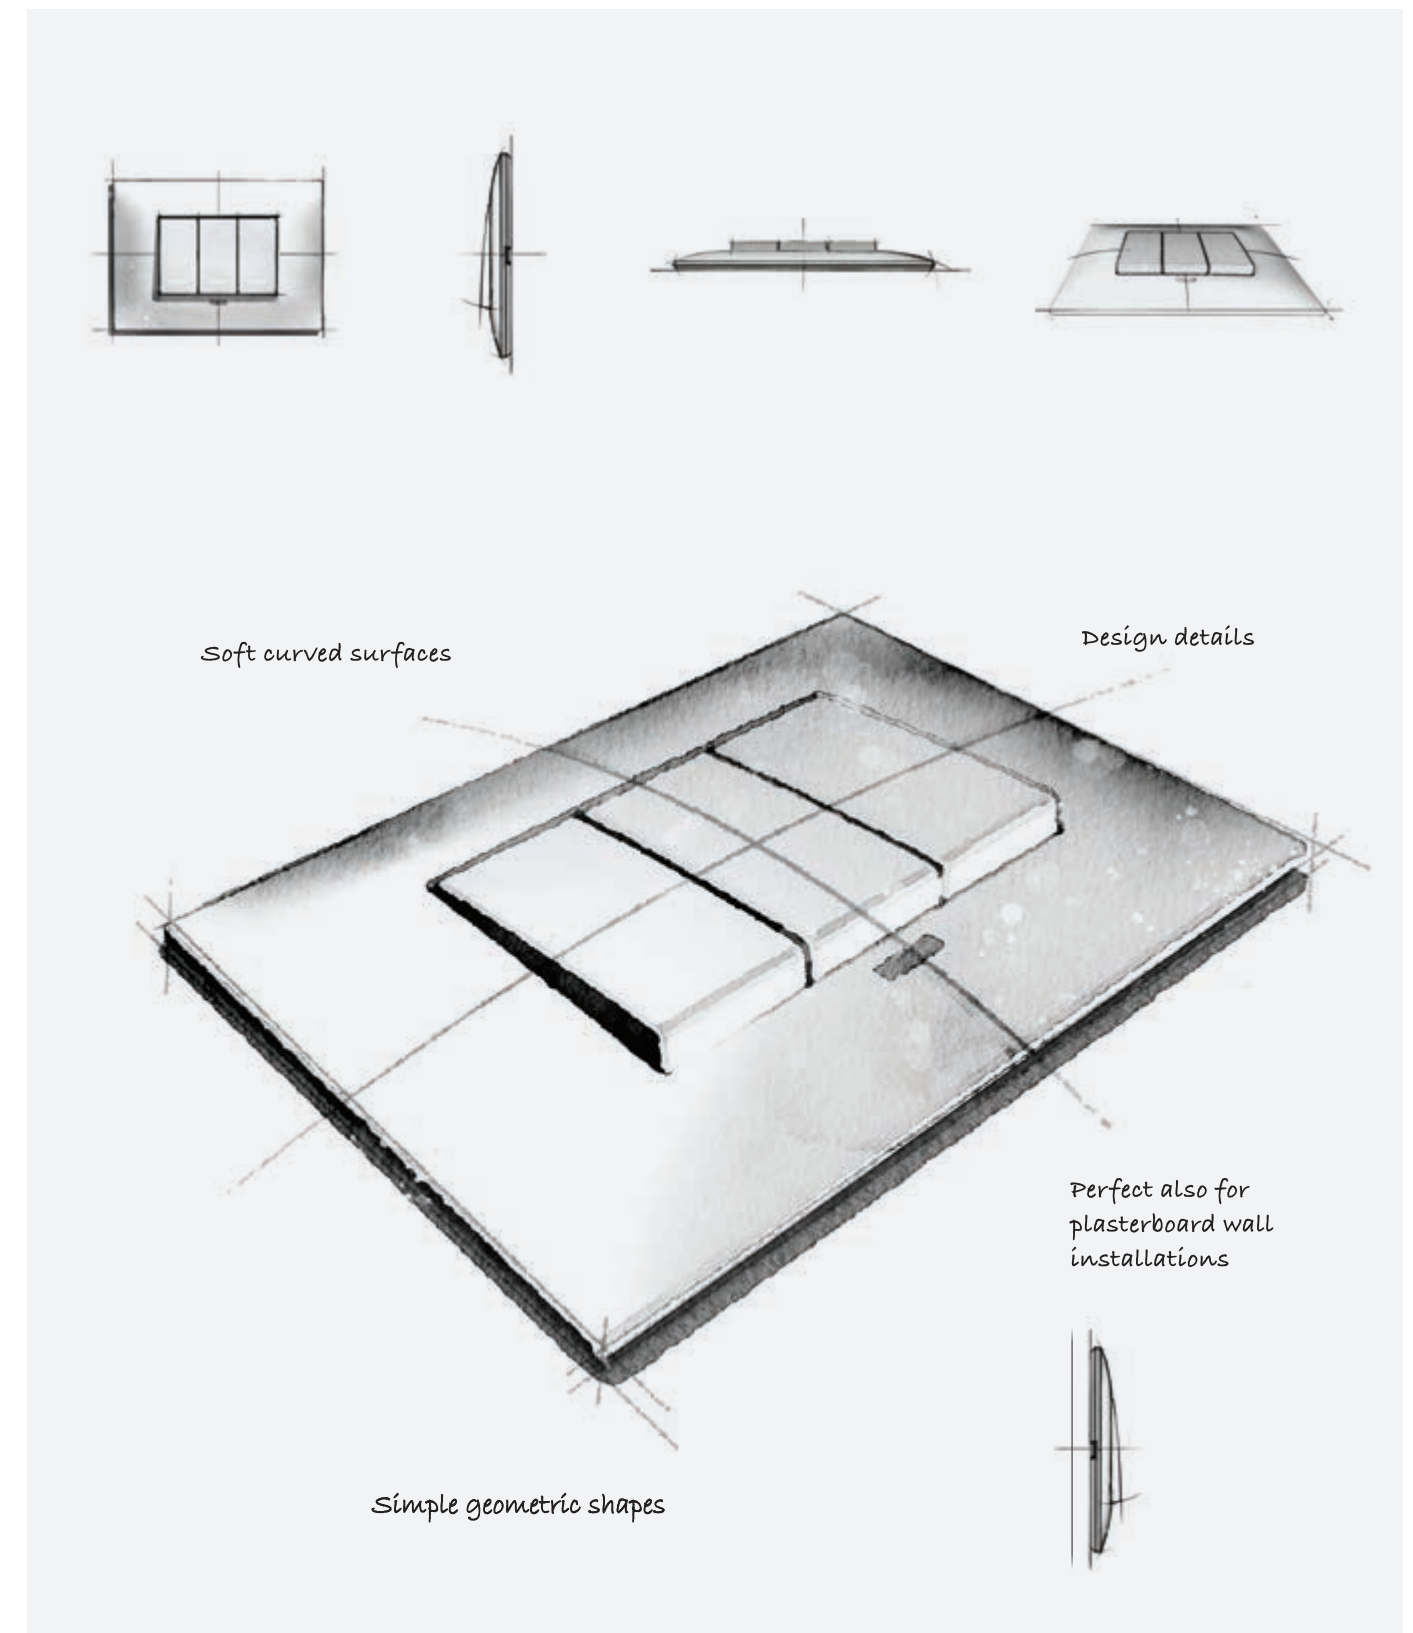

NEVE UP

NEVE UP. Black or white?



We have designed a comprehensive system that allows you, with the flexibility of its modular system, to have more opportunities to create or upgrade your existing electrical installation.

Choose the
Total Look style.



Total Look - White
Total Look - Carbon matt

A unique style, total look in black or white, or carbon matt, all perfectly coordinated. Same colour for cover plates and switches.





NEVE UP is bright white but not just white!

NEVE UP has **many finishes**: from **glossy** basics to **matt** and **metal**. **12 finishes** to combine with the white and carbon matt devices.

Glossy technopolymer

White - Total Look

Ivory

Slate grey

Black

Matt painted technopolymer

Matt white

Matt dove grey

Matt clay

Carbon matt - Total Look

Metal metallic painted technopolymer



Matt silver



Matt nickel

Matt titanium

Matt copper



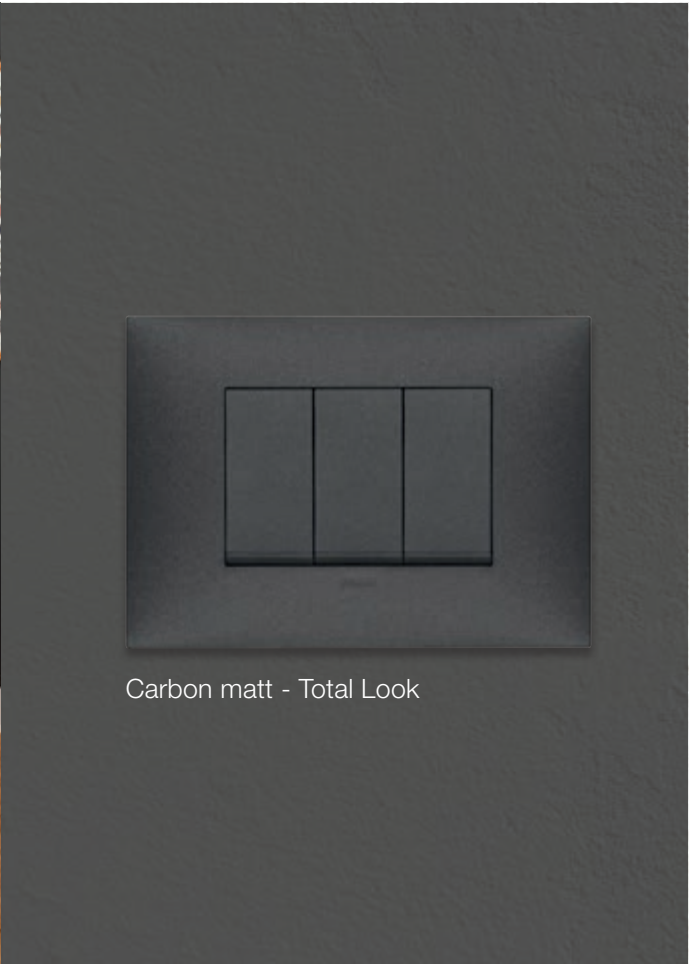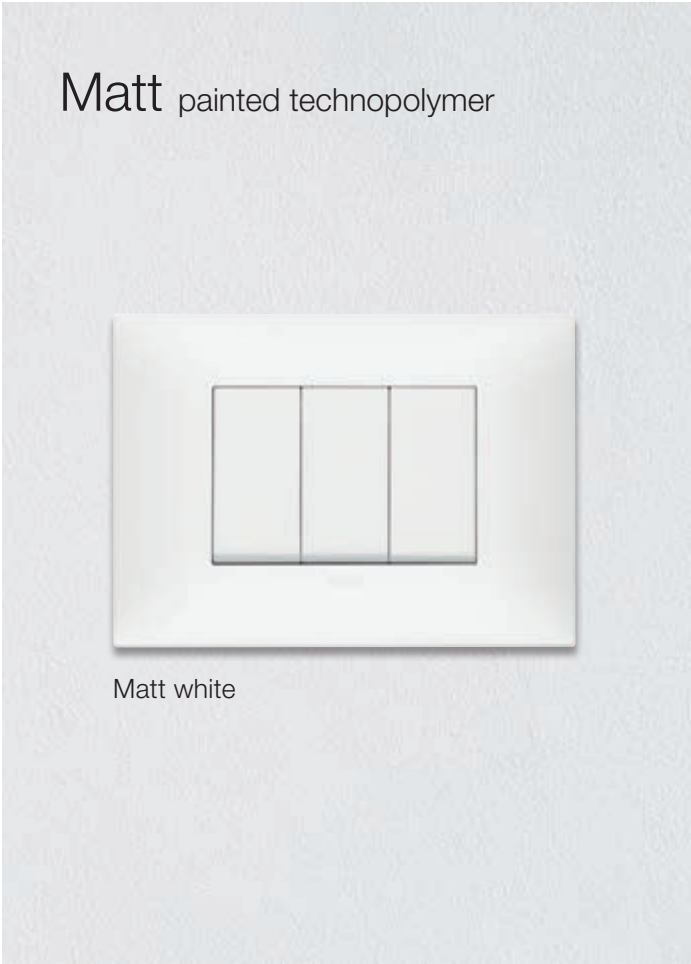

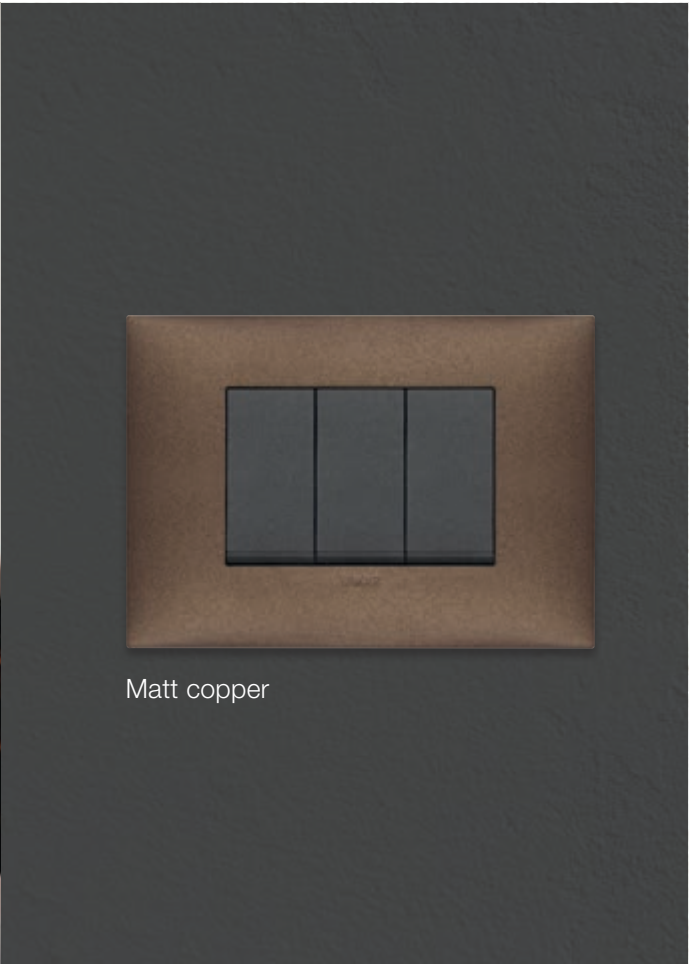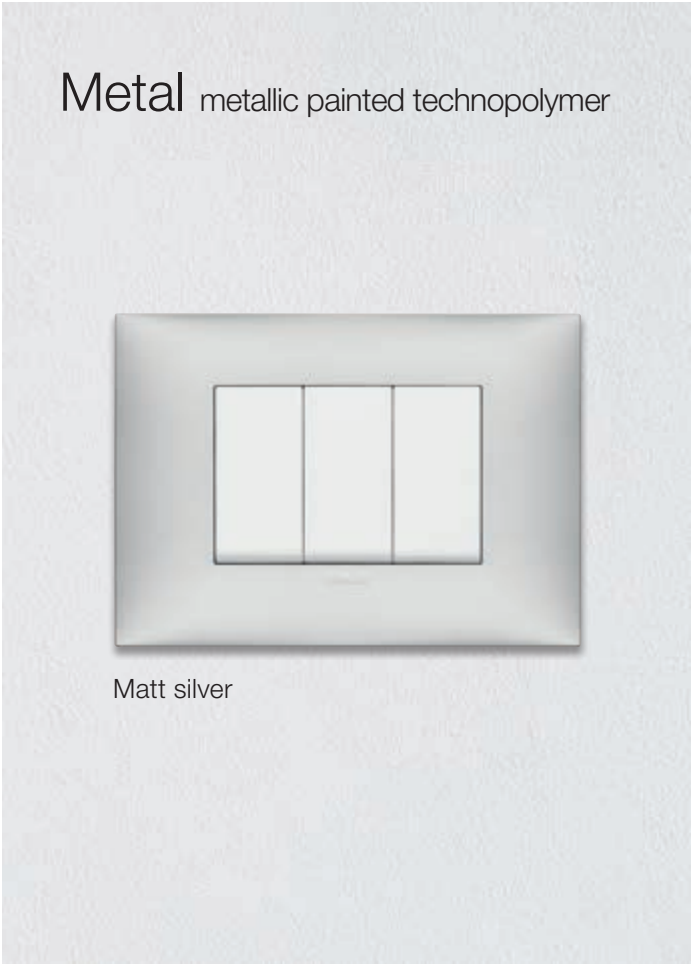




NEVE UP. New, extensive, versatile and multistandard range.


We have redesigned NEVE UP to accommodate the various requirements in different countries: an extensive and versatile range of devices in **all international standards**, available for both Italian/US and French/German standards.

MODULAR & MULTI-MODULAR SOLUTIONS (Italian/US standard)


Thanks to the modularity of the devices:
for cover plates with 1, 2, 3 and up to 7 modules.




3 blank modules




1 central module




2 separate modules




2 central modules



3 modules




4 modules

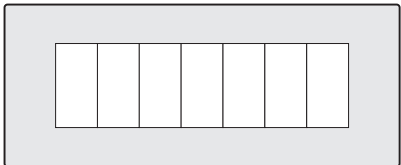


7 modules

MULTIGANG SOLUTIONS (French/German standard)


Multigang cover plates are available for the French-German standard up to four gangs, to cover any modularity requirement.




1 central module




2 modules



2+2 modules

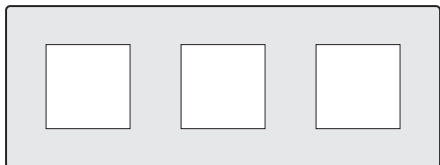

2+2+2 modules

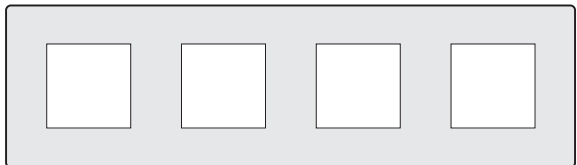

2+2+2+2 modules

NEVE UP. Easy and convenient stand-alone solutions **for the home and office.**

STAND ALONE THERMOSTAT.

Dial operated thermostat, a sleek design in a super-easy-to-use thermostat. A dial to adjust the temperature, 4 preset buttons for ON/OFF selection, °C/°F setting, summer/winter mode selection and display brightness adjustment.



USB SOCKET OUTLETS.

The type A USB charger has now been supplemented with the type A+C and C+C one, the new technological standard used to power and charge latest-generation devices. Ideal in hotel rooms and offices.



ALWAYS THE RIGHT LIGHTING TO AVOID ENERGY WASTAGE.

Thanks to the connected dimmers, installed at home, in office or hotel, you manage your lighting in a smarter way: you obtain the appropriate degree of lighting depending on the circumstances, avoid energy wastage and make lighting management of all settings simpler and more convenient, being aware of correct energy usage.



EMERGENCY LAMP.

The emergency lamp comes on in the event of a power outage to guide you safely in the dark.



INFRARED 1-WAY SWITCH.

Without touching the switch, the infrared motion sensor turns the lights on and off only at night when someone passes by. Ideal for optimising electricity consumption levels and to avoid contact with the lighting device.



NEVE UP. Easy and convenient stand-alone solutions for hospitality.


THE BEST TEMPERATURE EVERYWHERE.

The optimum climate control by means the programming of the 7 days per week temperature, it is very easy and the clear display helps you to change the setting at any time and even from smartphone and tablet.



SMART SYSTEM FOR ACCESS CONTROL.

Ideal for small and medium-sized facilities such as small hotels or B&Bs, it offers guests the best in terms of comfort and safety, guaranteeing the manager high management performance and energy efficiency. With the new View Key App the smartphone can become a key to access restricted areas.

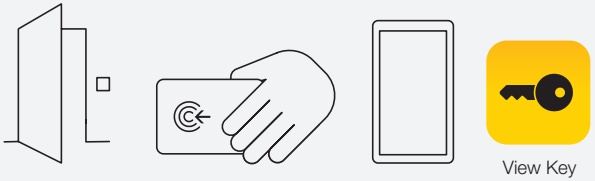

SHAVER SOCKET OUTLET AND CORD-OPERATED PUSH BUTTON.

For use in B&Bs and small hotels, the shaver socket outlet has a 20 VA isolating transformer with a power supply of 230 V and 120 V. There is also a cord-operated push button for installation in the bathroom for the safety of guests.



SPECIAL PUSH BUTTONS.

The Do Not Disturb and Please Clean push buttons facilitate communication between guests and service staff of the hotel, for enhanced guest comfort and quiet.



A FULL RANGE OF DATA AND POWER SOCKET OUTLETS.

Wide range of power socket outlets, from German to French standard, from Italian to American ones. Data, USB and TV-Radio-SAT socket outlets all guarantee fast and safe connection to a high quality standard.



NEVE UP. New watertight boxes.

Protected from dust and humidity.

IP55

IP40

The new enclosures extend their field of action to environments where IP40 and IP55 degrees of protection are required: warehouses, basements and boiler rooms, construction sites, terraces, gardens and sports facilities. Wall mounted for 3 and 4 modules with transparent anti-UV membrane. For wall installation with IP55 protection against dust and water splashes. **Suitable for use in different contexts** thanks to the **glossy white and black finishes** with a central part made of a soft membrane for activating the 1-way switches without opening the door of the enclosure.



NEVE UP. Protection first and foremost.
Co-ordinated, versatile and hard-wearing range.

- **Easy installation** of devices thanks to the **160° opening of the door**.
- Easy use thanks to the **system that blocks the door open at 120°**.
- **Easy access** to the devices thanks to the **large opening** and **accessible door release**.

Soft membrane for operating the switch without opening the door of the enclosure

Easy opening thanks to large door release

160°

120°

Opening of door up to 160°

Possibility of blocking the door at 120°

IP55 surface mounting covers Glossy black

IP55 surface mounting covers white

IP55

2 modules

3 modules

4 modules

Range	Models / Colours	Modularity	Specifications
IP55		 2M 3M 4M	• 160° door opening • 120° door lock • Installation/removal of devices from the front (insertion of screwdriver from rear)
IP55		 2M 3M 4M	• 160° door opening • 120° door lock • Installation/removal of devices from the front (insertion of screwdriver from rear) • Pre-drill walls • 1 hole already present + cable gland
IP40		 2M 3M 4M	• Installation/removal of devices from the front (insertion of screwdriver from rear) • Pre-drill walls • 1 hole already present + cable gland

NEVE UP.

Opportunities for you

We are a team of professionals who provide expert support and customized global solutions for automating, connecting and monitoring the entire building while assuring totally matching styling of all visible devices.



vimar.com - our on-line service platform, available 24/7. Vimar's know-how at your fingertips.

Navigate the on-line catalogue, a detailed database of all our codes with technical drawings, instruction sheets, and product photos.

- Go to the **download section** and choose your language:
- **Dedicated catalogues** and **brochures** of our product range, systems and solutions.
 - **Video** tutorial section, also available on You Tube channel.

From the homepage go to the **News** to stay up-to-date and to **References** to see our latest **Projects**.



We design with a sustainable approach.

Our commitment to the future

Products assessed according to the LCA approach

The painting process only uses water-based or UV-reticulating paints for an extremely low solvent emission into the atmosphere. We assess the environmental performance of Vimar's high-turnover products according to the LCA (Life Cycle Assessment) approach, with respect to the international reference standards ISO 14040 and 14044.

Headquarters with renewable energy.

For the supervision and analysis of energy consumption levels in our plants, we have adopted the logic of smart metering. Our new logistics and production pole has been fitted with an open-circuit geothermal system, 3000 square metres of biodynamic cement panels, while the roof of the building has been planted with Sedum green affording greater thermal insulation and covered with 2,442 photovoltaic modules. These design choices show sustainability, architectural value and occupational comfort expressed to the full.

Eco-packaging

The cardboard cases and containers for the products and the cardboard boxes for transport are made from recycled material, printed with water-based ink and use exclusively ecological glues. We use paper with the FSC mark which certifies the origin of responsibly managed forests, as well as allowing its traceability. We have reduced the weight of the packaging and discarded the mixed ones to facilitate sorting.



Catalogue section

Control devices	44
Power and signal socket outlets	48
Signalling	52
Climate control	52
Hotel solutions	53
View Wireless Smart home	54
Range of cover plates	62
Installation types	66


NEVE UP Free to change.

Flexible modular system installations.

Thanks to the many mounting frames available, ranging from 1 up to a maximum of 7 or 2+2+2+2 modules, devices with 1, 2, 3 modules, an extensive range of solutions can be found for all installation needs. The lighting switch can be completed with the cover plate in the colour and material of your choice.



2 modules

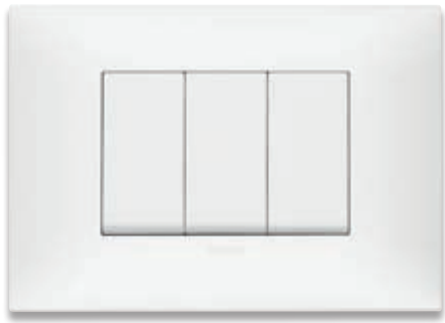


3 modules

Customization and backlighting.
Backlit and customized devices are available both in white and carbon matt colours, to easily locate the switch and immediately know its function.



Modular devices.
Combinations with 1, 2 and 3 module devices on 3 module mounting frames.

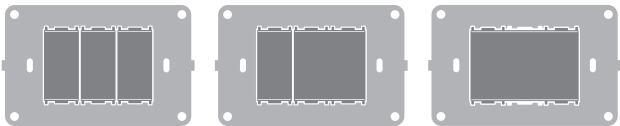

3 x 1

1 x 1 and 1 x 2

1 x 3


COVER PLATES + INTERCHANGEABLE DEVICES + MOUNTING FRAME



Add and change functions over time, depending on your specific living needs.




2+2 modules

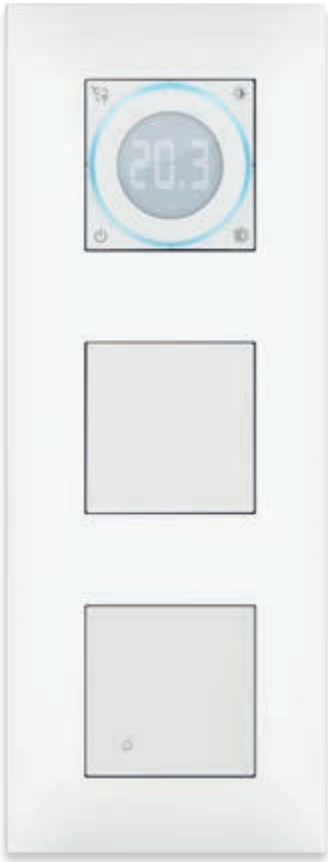


2+2+2 modules, vertical use

2+2+2 modules, horizontal use

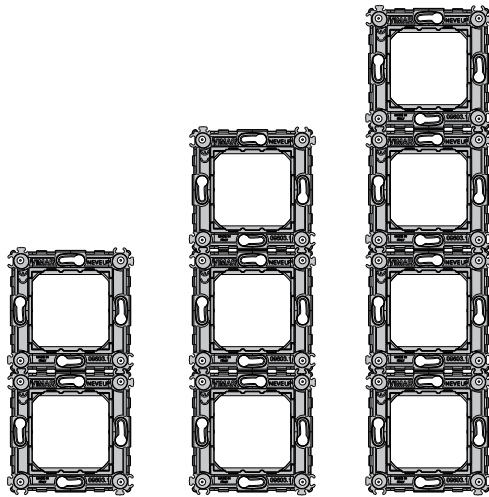

90°
Multigang switches can be used horizontally or vertically depending on the specific needs of the setting.

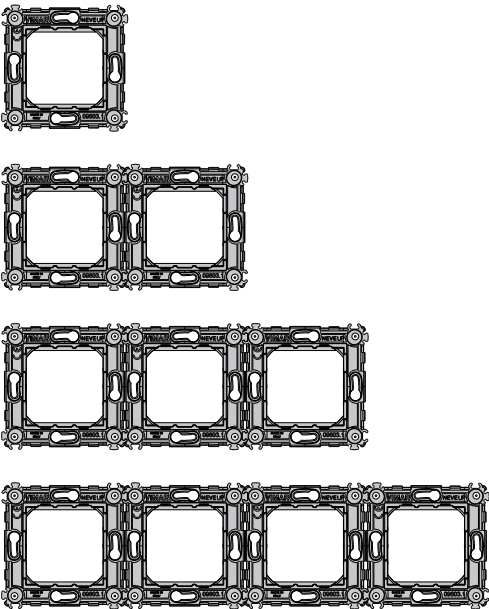

NEVE UP is quality for quick and easy installation. We take care of every detail

Your installation is easy to fit.

Installation is made easier thanks to the mounting frame with interlocking teeth that provide strong and reliable fixing for each single device and allows perfect alignment between devices to create a tidy and delightful stylistic effect. The devices are fixed front-on to the mounting frame, allowing work on the installation at any time without having to remove the mounting frame from the box.



Improved electrical load transmission.

The use of noble metals such as silver for the terminal contacts makes the conduction of the electrical load easier, thereby lowering the operating temperature of the contacts making the device last longer.

Screw terminals.

The metal plate in the terminals is curved: a Vimar refinement allowing different cross section wires to be held in place when clamped even at the same time. Secure fastening is assured for both signal circuit cables with cross-section 0.5-2.5 mm² and power circuit cables with cross-section 1.5-2.5 mm².

It's easy and flexible to upgrade over time

- Front clamping system for an easy mechanism installation when the support frame is already installed on the wall
- Specially designed terminal blocks prevent the mechanism from being subjected to strain when the screw is overloosened, allowing a power drill to be used for tightening and loosening the screws without damaging the mechanism




Perfect alignment of buttons on the mounting frame.

The stiffness of the mounting frame along with the small production tolerances provide the required dimensional accuracy to guarantee perfect aligned rocker switches. The special structure also makes it possible to compensate for the thickness of the mounting box for plasterboard, guaranteeing the perfect fit of the cover plate with the wall.


Perfect styling result, even on plasterboard walls

NEVE UP is the ideal on plasterboard.

The special structure of the mounting frame affords an attractive flush-fit effect, where the cover plate blends in seamlessly with the wall. In installations on plasterboard walls, it also covers the protrusion of the mounting box perfectly.

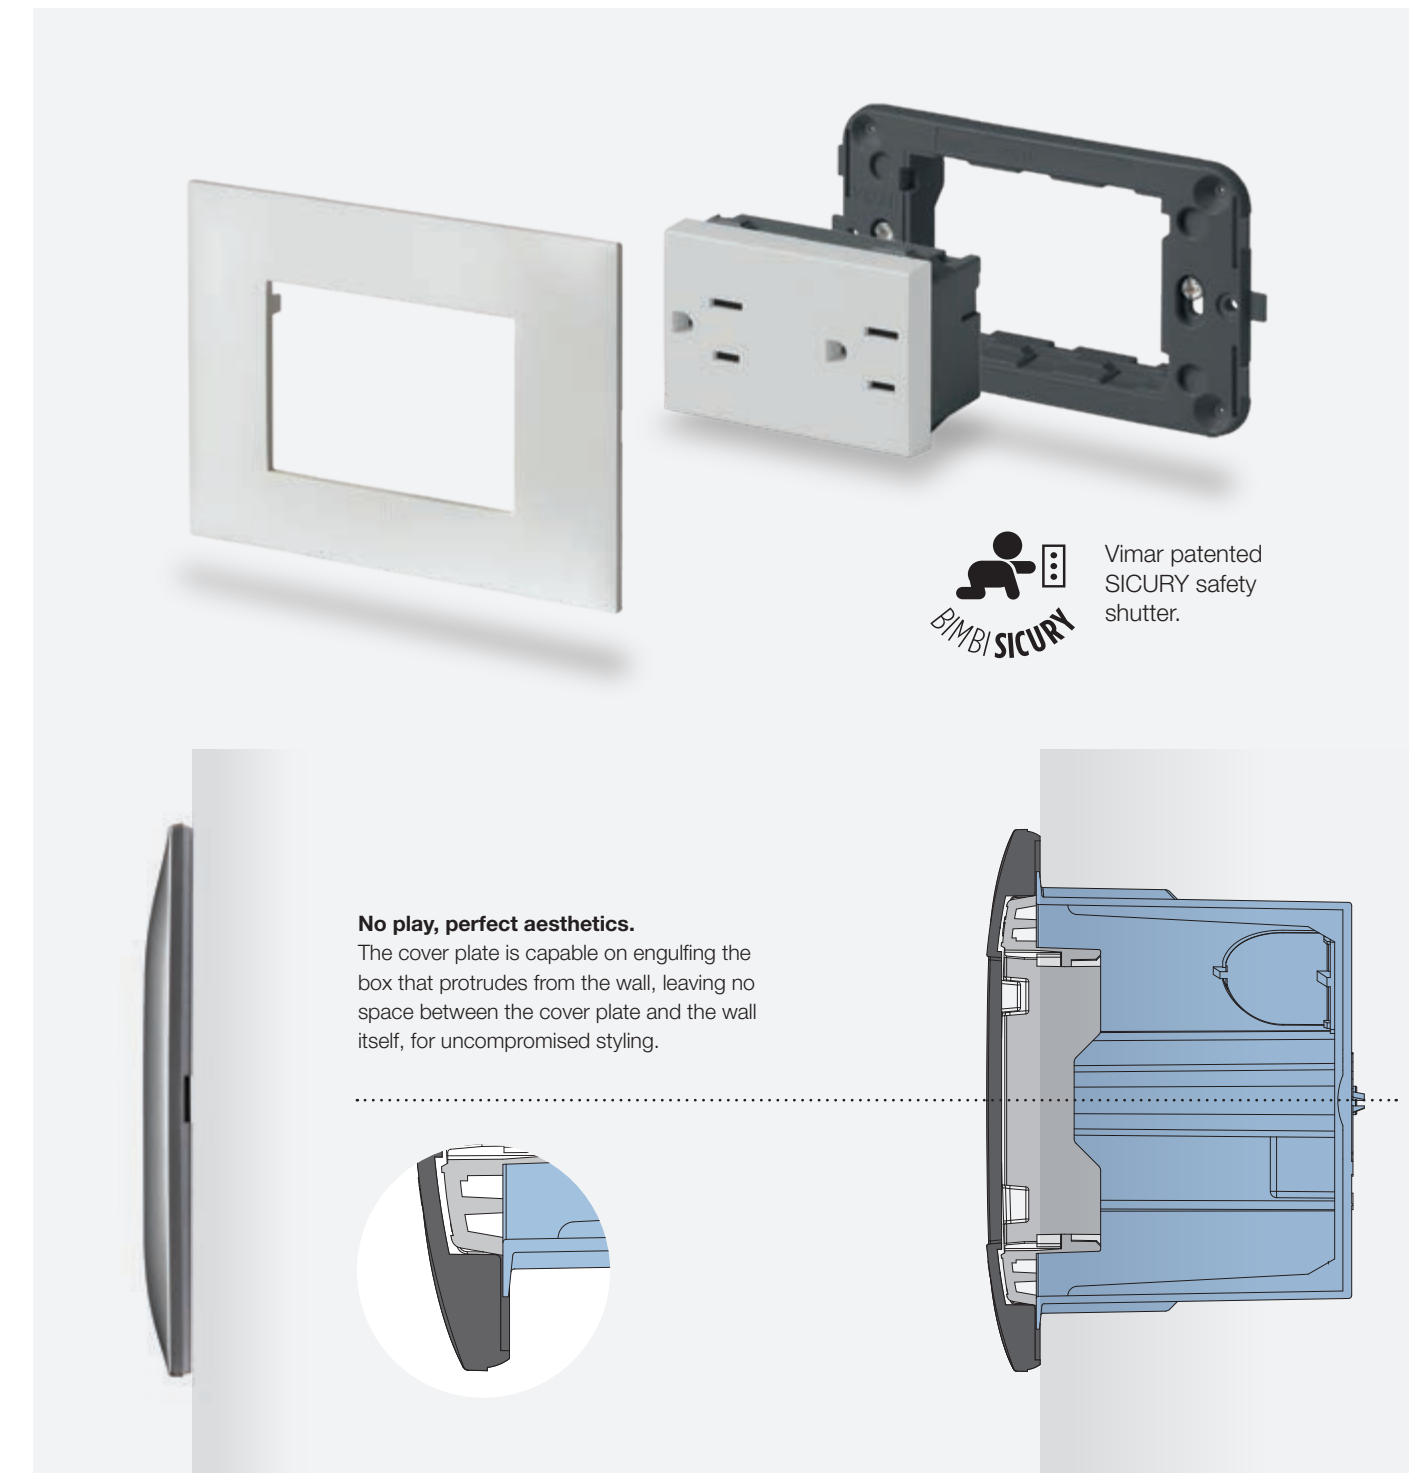


Mounting features
Italian and American standard








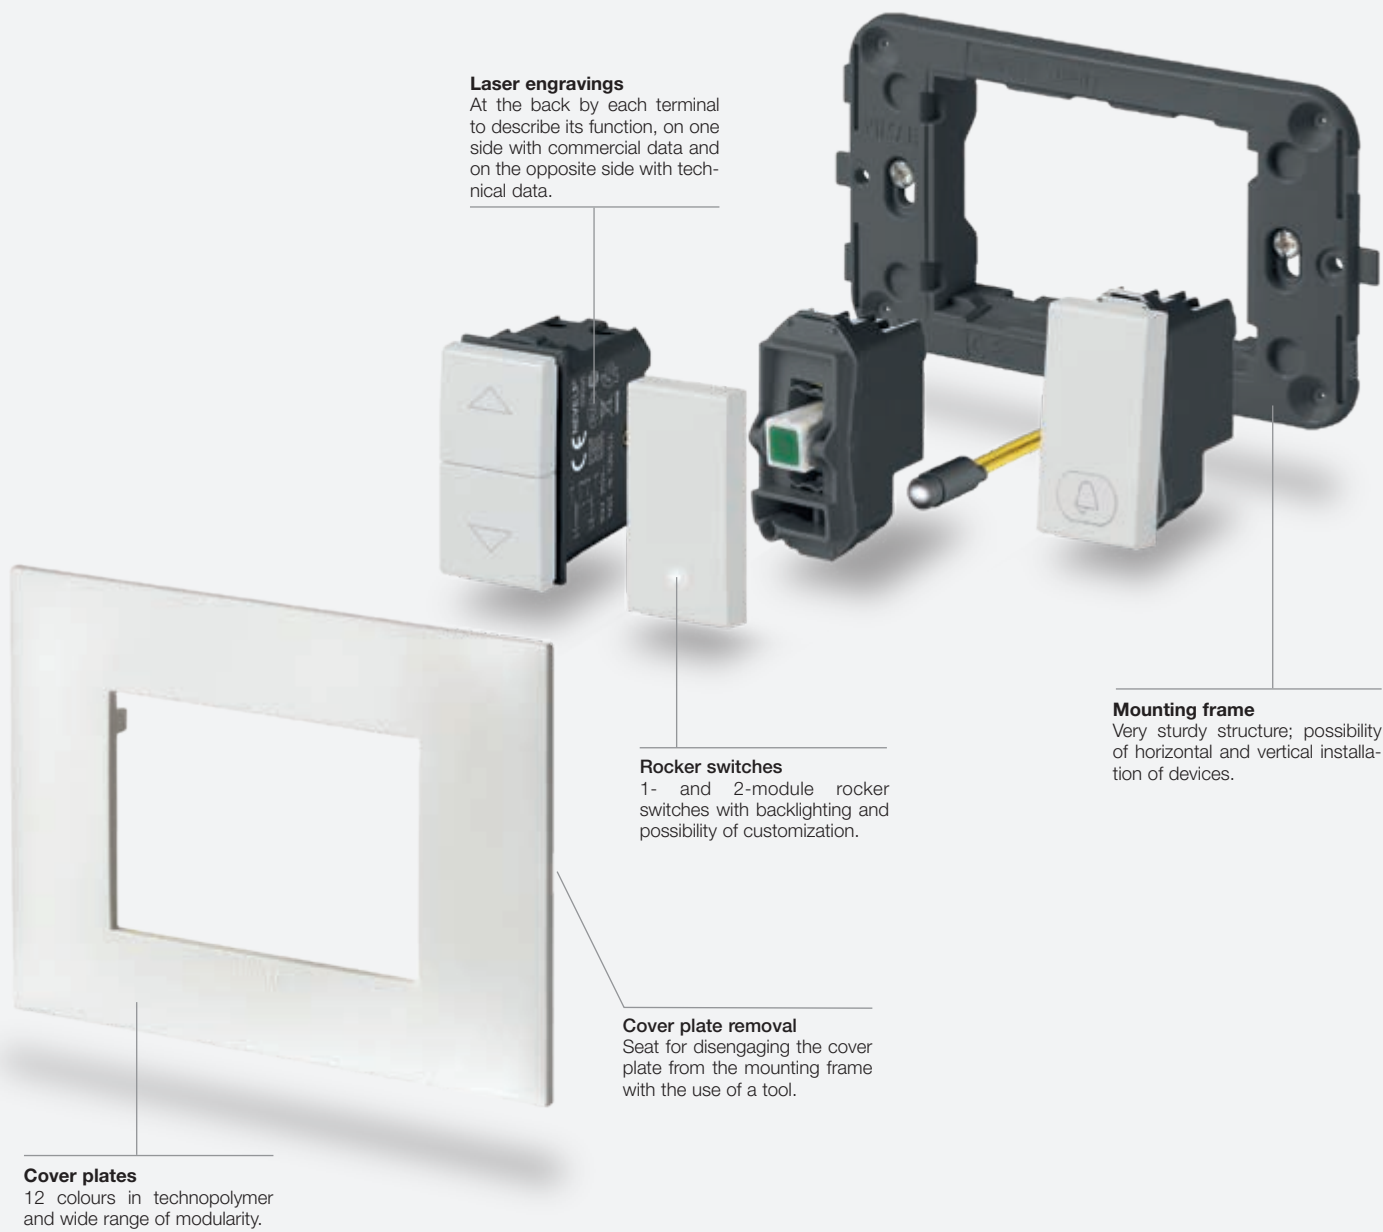


Composition	Boxes	Frames	Devices	Cover plates
 1-central module, round box  2 modules, round box	 Flush mounting	 With/without screws or with claws	 1 module  1 x 2 modules  2 x 1 module	 1-central module*  2 modules*
 2-central modules, for round or 3-module box	 Flush mounting  Flush mounting	 With screws  With screws	 2 modules  2 x 1 module	 2-central modules*, vertical  2-central modules*, horizontal
 From 1-central to 2-separate modules, for 3-module box  From 3 to 7 modules	 Flush mounting	 With screws  With screws  With screws	 1 module  2 x 1 module  1 and 2 modules  3 x 1 module  3 modules	 1-central module*  2-separate modules*  From 3 to 7 modules*  Blank module*
Installation of Plana devices				
 3 modules with Plana devices	 Flush mounting	 Mounting frame for Plana devices, with screws	 3 x 1 module, Plana devices	 Neve Up cover plate, 3 modules*


* For other combinations, see the installation types from page 66

Mounting features
German and French standard

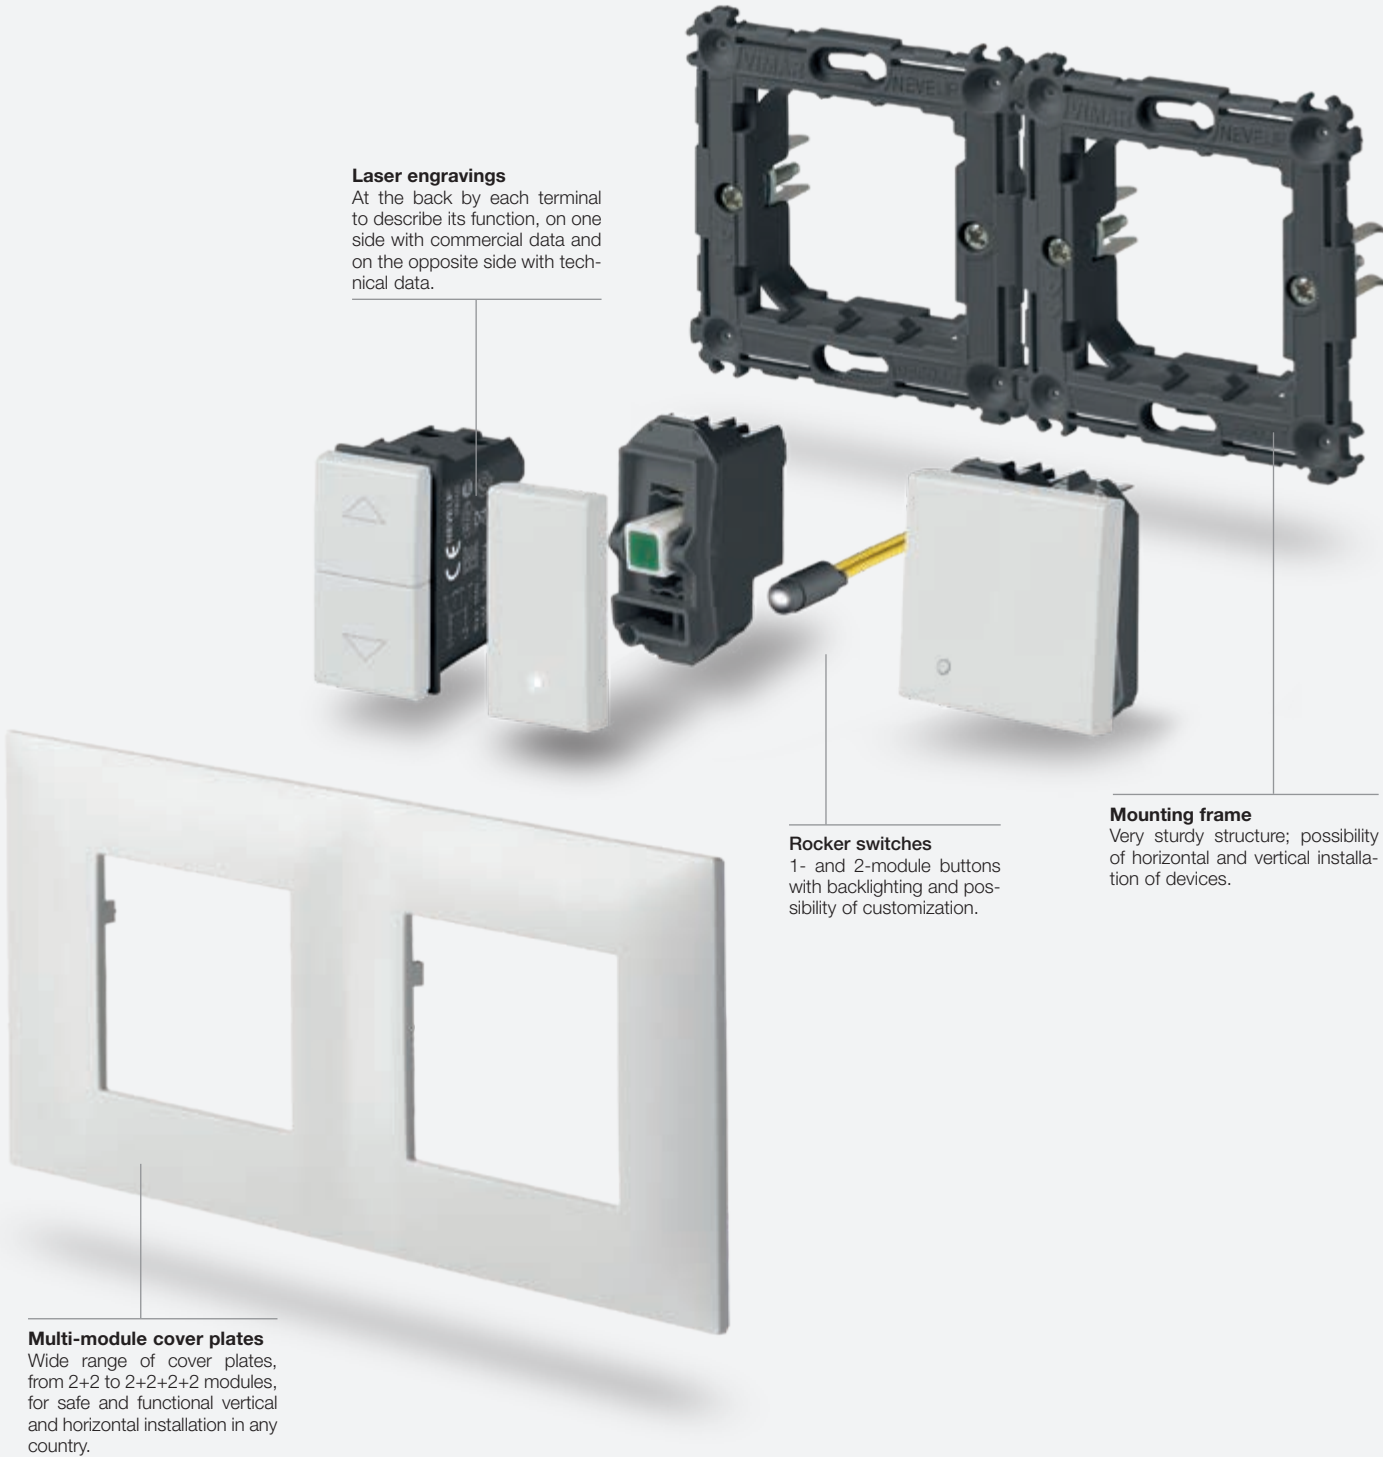

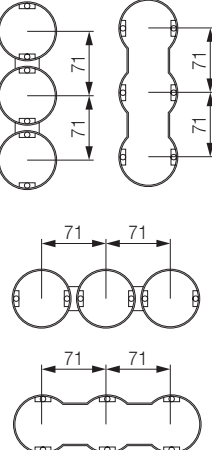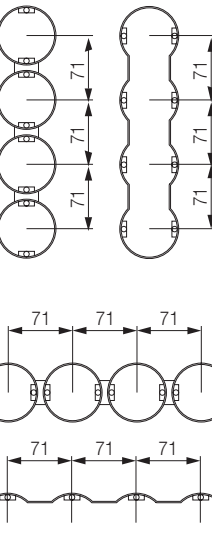Composition	Box	Frame	Device	Cover plate
 2 modules, ø 60 and 65 mm mounting box			 1-gang switch, 2 modules	 2 modules*
 2+2 modules, 71 mm distance between centres		 	 2 x 2 modules vertical  2 x 2 modules horizontal	 vertical  horizontal
 2+2+2 modules, 71 mm distance between centres		 	 3 x 2 modules vertical  3 x 2 modules horizontal	 vertical  horizontal
 2+2+2+2 modules, 71 mm distance between centres		 	 4 x 2 modules vertical  4 x 2 modules horizontal	 vertical  horizontal

* For other combinations, see the installation types from page 68

White				Carbon Matt				
Blank modules and cable outlets								
								
09041 Blank module. Depth: 9 mm		09044 Cable outlet. Depth: 11,1 mm		09041.CM Blank module. Depth: 9 mm		09044.CM Cable outlet. Depth: 11,1 mm		
1P 1-way switches 250 V~								
								
09001 16 AX. Depth: 23,1 mm		09001.2 16 AX, - 2 modules. Depth: 23,1 mm		09001.CM 16 AX. Depth: 23,1 mm		09001.2.CM 16 AX, - 2 modules. Depth: 23,1 mm		
2P 1-way switches 250 V~ (lightable°)								
								
09015 16 AX. Depth: 32,7 mm		09016 20 AX. Depth: 25,4 mm	09016.G 20 AX. Depth: 25,4 mm	09016.2.G 20 AX, - 2 modules. Depth: 25,4 mm	09015.CM 16 AX. Depth: 32,7 mm	09016.CM 20 AX. Depth: 25,4 mm	09016.G.CM 20 AX. Depth: 25,4 mm	09016.2.G.CM 20 AX, - 2 modules. Depth: 25,4 mm
								
09020 32 A, - 2 modules. Depth: 30,5 mm					09020.CM 32 A, - 2 modules. Depth: 30,5 mm			

Connected actuators - backside installation



03981
Control device with NO 100-240 V 50/60 Hz relay output for 500 W incandescent lamps, 100 W LED lamps, 250 VA electronic transformers, 120 W fluorescent lamps, remote control, 1 input for wired control to recall a scenario, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0



VIEW
IoT smart life



Bluetooth®



zigbee

1P 2-way switches 250 V~							
							
09005 16 AX. Depth: 23,1 mm	09005.2 16 AX, - 2 modules. Depth: 23,1 mm	09005.CM 16 AX. Depth: 23,1 mm	09005.2.CM 16 AX, - 2 modules. Depth: 23,1 mm				

White		Carbon Matt					
1P reversing switches 250 V~							
							
09013 16 AX. Depth: 26,7 mm	09013.2 16 AX, - 2 modules. Depth: 26,7 mm	09013.CM 16 AX. Depth: 26,7 mm	09013.2.CM 16 AX, - 2 modules. Depth: 26,7 mm				
1P NO push buttons 250 V~							
							
09008 10 A. Depth: 23,1 mm	09008.2 10 A - 2 modules. Depth: 23,1 mm	09008.CM 10 A. Depth: 23,1 mm	09008.2.CM 10 A - 2 modules. Depth: 23,1 mm				
Quid - Magnetic relay modules for lighting - backside installation							
							
03991 ON/OFF sequence pulse relay module, 1 input for NO push button, 1 NO 10 A 220-240 V~ 50/60 Hz relay output	03992 ON/OFF sequence pulse relay module, 1 input for NO push button, 1 input for reset push button, 1 NO 10 A 220-240 V~ 50/60 Hz relay output, luminous signalling of load status	03993 ON/OFF sequence pulse relay module, 1 input for NO push button, 2 NO 10 A 220-240 V~ 50/60 Hz sequence relay outputs					
Backlit mechanisms° (to be combined with white or carbon matt rockers)							
							
09001.0.250¹ 1P 16 AX 250 V~ 1-way switch. Depth: 23,1 mm	09005.0.250¹ 1P 16 AX 250 V~ 2-way switch. Depth: 23,1 mm	09008.0.12¹ 1P NO 10 A 12 V push button. Depth: 23,1 mm	09008.0.250¹ 1P NO 10 A 250 V~ push button. Depth: 23,1 mm				
1-module interchangeable rockers							
							
09021 Not lightable	09021.N Neutral, lightable	09021.G Customizable	09026.DND Do Not Disturb, with diffuser, lightable	09021.CM Not lightable	09021.N.CM Neutral, lightable	09021.G.CM Customizable	09026.DND.CM Do Not Disturb, with diffuser, lightable
							
09026.PLS Please Clean, with diffuser, lightable	09021.C Bell symbol, lightable	09021.L Light symbol, lightable	09021.P Key symbol, lightable	09026.PLS.CM Please Clean, with diffuser, lightable	09021.C.CM Bell symbol, lightable	09021.L.CM Light symbol, lightable	09021.P.CM Key symbol, lightable
							
09021.F Fan symbol, lightable	09021.H Flame symbol, lightable	09021.S Switch ON symbol, lightable		09021.F.CM Fan symbol, lightable	09021.H.CM Flame symbol, lightable	09021.S.CM Switch ON symbol, lightable	

White

Carbon Matt

2-module interchangeable buttons



09022
Not lightable



09022.N
Neutral, lightable



09022.CM
Not lightable



09022.N.CM
Neutral, lightable

1P special switches 250 V~



09052
NO 10 A,
cord-operated.
Depth: 24,7 mm



09050
NO 10 A, with
lightable name-plate
- 2 modules.
Depth: 25,2 mm



09052.CM
NO 10 A,
cord-operated.
Depth: 24,7 mm

1P push buttons 250 V~



09066
Two independent
NO 10 A
Depth: 29 mm



09066.CM
Two independent
NO 10 A
Depth: 29 mm

Switches for roller blind control 250 V~



09060
2P 10 AX 2-way
switch,
OFF-central.
Depth: 33,5 mm



09062
1P NO 10 A
2-interlocked
push buttons.
Depth: 29 mm



09060.CM
2P 10 AX 2-way
switch,
OFF-central.
Depth: 33,5 mm



09062.CM
1P NO 10 A
2-interlocked
push buttons.
Depth: 29 mm

Quid - Electronic relay modules and control unit modules for roller shutters



03996
Centralizable relay module, slat orientation,
with relay outputs for cosφ 0,6 motor 2 A
220-240 V~ 50/60 Hz, position saving, for
backside or junction boxes installation



03997
Control unit module, 2 inputs for NO push
button, 6 outputs for Quid roller shutter
relay module (03996), 220-240 V~ 50/60 Hz
power supply, for backside or junction boxes
installation

Dimmers**



09135.1
MASTER,
universal
09135.1.120
As above,
120 V~.
Depth: 41,5 mm



09153
100-500 W
push-push +
potentiometer,
230 V~.
Depth: 40 mm



***09146**
60-900 W
60-300 VA,
potentiometer,
230 V~.
Depth: 40 mm



09147
30-500 W
30-300 VA,
potentiometer,
120 V~.
Depth: 40 mm



09135.1.CM
MASTER,
universal
09135.1.120.CM
As above,
120 V~.
Depth: 41,5 mm



09153.CM
100-500 W
push-push +
potentiometer,
230 V~.
Depth: 40 mm



***09146.CM**
60-900 W
60-300 VA,
potentiometer,
230 V~.
Depth: 40 mm



09147.CM
30-500 W
30-300 VA,
potentiometer,
120 V~.
Depth: 40 mm

White

Carbon Matt

Dimmer - controllable loads

Type	UNIVERSAL							
LOADS	09135.1				09135.1.120			
	2-wire connection		3-wire connection		2-wire connection		3-wire connection	
	LE	TE	LE	TE	LE	TE	LE	TE
Incandescence	40 ÷ 400 W	40 ÷ 300 W	40 ÷ 400 W	40 ÷ 300 W	40 ÷ 400 W	40 ÷ 300 W	40 ÷ 400 W	40 ÷ 300 W
Compact fluorescent lamps (CFL)	10 ÷ 100 W max 5 lamps	10 ÷ 200 W max 10 lamps	10 ÷ 100 W max 5 lamps	10 ÷ 200 W max 10 lamps	10 ÷ 100 W max 5 lamps	10 ÷ 200 W max 10 lamps	10 ÷ 100 W max 5 lamps	10 ÷ 200 W max 10 lamps
LED	5 ÷ 100 W max 10 lamps	5 ÷ 200 W max 20 lamps	3 ÷ 100 W max 10 lamps	3 ÷ 200 W max 20 lamps	5 ÷ 100 W max 10 lamps	5 ÷ 200 W max 20 lamps	3 ÷ 100 W max 8 lamps	3 ÷ 200 W max 16 lamps
Electronic transformers for halogen lamps	40 ÷ 300 VA max 3 transformers type 	40 ÷ 300 VA max 5 transformers type 	40 ÷ 300 VA max 3 transformers type 	40 ÷ 300 VA max 5 transformers type 	40 ÷ 300 VA max 3 transformers type 	40 ÷ 300 VA max 5 transformers type 	40 ÷ 300 VA max 3 transformers type 	40 ÷ 300 VA max 5 transformers type 

Dimmer - controllable loads

Type	STANDARD		
LOADS	09153 (with push-push switch and rotary potentiometer control)	09146 (with rotary potentiometer)	09147 (with rotary potentiometer)
	Incandescence 100 - 500 W	60 - 900 W	30 - 500 W
Ferromagnetic transformers for halogen lamps		60 - 300 VA 230 V~, 50/60 Hz	30 - 300 VA 120 V~, 50/60 Hz

Infrared switches



09181
Lighting switch, NO 6 A 230 V~
relay output, 50/60 Hz.
Depth: 37 mm



09181.CM
Lighting switch, NO 6 A 230 V~
relay output, 50/60 Hz.
Depth: 37 mm

Smart radio frequency devices



03955
Flat control with four push buttons with
868 MHz radio frequency transmitter,
EnOcean standard, energy harvesting
power supply provided by the built-in
electro-dynamic generator, 2 modules.



03925
Flat control with four push buttons with
2.4 GHz radio frequency transmitter,
Bluetooth Low Energy standard, energy
harvesting power supply provided by
the built-in electro-dynamic generator,
2 modules.




03905
Flat control with four push buttons with
2.4 GHz radio frequency transmitter,
ZigBee Green Power standard without
batteries, power supply provided by
the built-in electro-dynamic generator,
2 modules.




03906
Flat control with four push buttons with
2.4 GHz radio frequency transmitter,
ZigBee Green Power and Friends of
Hue standard, energy harvesting power
supply provided by the built-in electro-
dynamic generator, 2 modules.



09507
Mounting frame for surface mounting of EnOcean,
Bluetooth, ZigBee radio controls to be completed
with Neve UP 2-module cover plates



09506
1-module interchangeable button
for EnOcean, Bluetooth, ZigBee
radio control - 2 pieces



09506.2
2-module interchangeable button
for EnOcean, Bluetooth, ZigBee
radio control



09507.CM
Mounting frame for surface mounting of EnOcean,
Bluetooth, ZigBee radio controls to be completed
with Neve UP 2-module cover plates



09506.CM
1-module interchangeable button
for EnOcean, Bluetooth, ZigBee
radio control - 2 pieces



09506.2.CM
2-module interchangeable button
for EnOcean, Bluetooth, ZigBee
radio control

White

Carbon Matt

SICURY 2P+E Italian standard socket outlets 250 V~



09201
10 A,
P11.
Depth:
23,2 mm



09203
Bpresa 16 A,
P17/11.
Depth:
23,2 mm



09209
16 A. P30
- 2 modules.
Depth: 29,3 mm



09210
16 A, universal
- 2 modules.
Depth: 26,4 mm



09201.CM
10 A,
P11.
Depth:
23,2 mm



09203.CM
Bpresa 16 A,
P17/11.
Depth:
23,2 mm



09209.CM
16 A. P30
- 2 modules.
Depth: 29,3 mm



09210.CM
16 A, universal
- 2 modules.
Depth: 26,4 mm

SICURY 2P+E socket outlets 250 V~ - German standard



09208
16 A, German
- 2 modules.
Depth:
29,5 mm



09208.C
16 A, German,
with cover
- 2 modules.
Depth: 29,5 mm



09208.CM
16 A, German
- 2 modules.
Depth:
29,5 mm



09208.C.CM
16 A, German,
with cover
- 2 modules.
Depth: 29,5 mm

SICURY 2P+E socket outlets 250 V~ - French standard



09212
16 A, French
- 2 modules.
Depth: 26,4 mm



09212.CM
16 A, French
- 2 modules.
Depth: 26,4 mm

Socket outlets 250 V~ - Euro-American standard



09233
2P 16 A,
Euro-American
(ø 4,8 mm).
Depth:
30 mm



09234
SICURY
2P 16 A,
Euro-American.
Depth:
30 mm



09248
SICURY 2P+E 16 A,
Euro-American
- 2 modules.
Depth: 26,5 mm



09249
Two SICURY 2P+E
16 A, Euro-American
- 3 modules.
Depth: 24,5 mm



09233.CM
2P 16 A,
Euro-American
(ø 4,8 mm).
Depth:
30 mm



09234.CM
SICURY
2P 16 A,
Euro-American.
Depth:
30 mm



09248.CM
SICURY 2P+E 16 A,
Euro-American
- 2 modules.
Depth: 26,5 mm



09249.CM
Two SICURY 2P+E
16 A, Euro-American
- 3 modules.
Depth: 24,5 mm

Socket outlets 127 V~ - USA and Arabian standard




09242
SICURY 2P+E
15 A, USA and
Arabian



09243
Two SICURY 2P+E
15 A, USA and Arabian
- 3 modules



09245
2P+E 15 A,
USA and
Arabian.
Depth:
27 mm



09246
Two 2P+E 15 A,
USA and Arabian
- 3 modules.
Depth: 26 mm




09242.CM
SICURY 2P+E
15 A, USA and
Arabian



09243.CM
Two SICURY 2P+E
15 A, USA and Arabian
- 3 modules



09245.CM
2P+E 15 A,
USA and
Arabian.
Depth:
27 mm



09246.CM
Two 2P+E 15 A,
USA and Arabian
- 3 modules.
Depth: 26 mm

▲ New article

* Not to be used in EU countries

NEVE UP

Socket outlets



White

Carbon Matt

SICURY 2P+E socket outlets 250 V~ - Israeli standard



09240
16 A, Israeli
- 2 modules.
Depth: 29,7 mm



09240.CM
16 A, Israeli
- 2 modules.
Depth: 29,7 mm

SICURY 2P+E socket outlets 250 V~ - Multistandard



***09257**
13 A, multistandard
- 2 modules.
Depth: 18,7 mm



***09257.CM**
13 A, multistandard
- 2 modules.
Depth: 18,7 mm

Socket outlets 2P+E 15 A 125 V~ 60 Hz - American standard



00296
Double American
standard with GFCI
- 3 modules.
Depth: 30,1 mm



00296.CM
Double American
standard with GFCI
- 3 modules.
Depth: 30,1 mm

Possible matches between plugs and sockets according to different national standards

PLUG \ SOCKET OUTLET	German					Italian					French					Euroamerican				American Saudi Arabian				Israeli	Multistandard
	09208..	09201..	09203..	09209..	09210..	09212..	09233	09234	09248	09249	09242	09245	09243	09246	09240	09257									
S10 Italian standard	•	•	•	•	•	•	•	•	•	•					•	•									
S11 Italian standard		•	•	•	•																				
S17 Italian standard			•		•																				
2P 2,5 A Europlug	•	•	•	•	•	•	•	•	•	•					•	•								•	•
2P+E 16 A 250 V~ German standard	•			•	•		○	○	○	○					○	○								○	○
2P+E 16 A 250 V~ German and French standards	•			•	•	•	○	○	○	○					○									○	
2P 16 A 250 V~ German and French standards	•			•	•	•	•	•	•	•					•									•	
2P+E 16 A 250 V~ French standard			○	○	○	•	○	○	○	○					○									○	
2P+E 10 A 250 V~ Swiss standard																									•
2P+E 16 A 250 V~ Israeli standard															•									•	
2P+E 5 A 250 V~ English standard																									•
2P+E 13 A 250 V~ English standard																									•
2P+E 15 A 125 V~ American standard									•	•	•	•	•	•											
2P 15 A 127 V~ American and Saudi Arabian standards											•	•	•	•											
2P+E 10 A 250 V~ Brazilian standard																									•
2P+E 10 A 250 V~ Chinese standard																									•
2P+E 10 A 250 V~ Australian standard																									•

• Plug standard matches socket outlet; ○ Plug standard matches the socket outlet without earth connection.

° Lamps and signalling units, page 59

48

49

Socket outlets • Signal reception socket outlets

White		Carbon Matt					
Shaver supply units							
							
09290 230 V~ 50/60 Hz, with 20 VA isolating transformer, 230 V~ and 120 V~ outputs - 3 modules. Depth: 42 mm		09290.CM 230 V~ 50/60 Hz, with 20 VA isolating transformer, 230 V~ and 120 V~ outputs - 3 modules. Depth: 42 mm					
SICURY 2P+E socket outlets 250 V~ (for dedicated supply lines)							
							
09203.R Bpresa 16 A P17/11, red. Depth: 23,2 mm	09210.R 16 A, universal, red - 2 modules. Depth: 26,4 mm	09208.A 16 A, German, orange - 2 modules. Depth: 29,5 mm	09208.R 16 A, German, red - 2 modules. Depth: 29,5 mm	09208.V 16 A, German, green - 2 modules. Depth: 29,5 mm	09240.R 16 A, Israeli, red - 2 modules. Depth: 29,7 mm		
USB supply unit							
							
09292 7,5 W 1,5 A, 1 USB-A, 120-240 V~ 50/60 Hz. Depth: 37 mm	09292.C 7,5 W 1,5 A, 1 USB-C, 120-240 V~ 50/60 Hz. Depth: 37 mm	09292.AC 12 W 2,4 A, USB A+C, 120-240 V ~ 50/60 Hz. Depth: 37 mm	09292.CC 15 W 3 A, USB C+C, 120-240 V ~ 50/60 Hz. Depth: 37 mm	09292.CM 7,5 W 1,5 A, 1 USB-A, 120-240 V~ 50/60 Hz. Depth: 37 mm	09292.C.CM 7,5 W 1,5 A, 1 USB-C, 120-240 V~ 50/60 Hz. Depth: 37 mm	09292.AC.CM 12 W 2,4 A, USB A+C, 120-240 V ~ 50/60 Hz. Depth: 37 mm	09292.CC.CM 15 W 3 A, USB C+C, 120-240 V ~ 50/60 Hz. Depth: 37 mm
Special socket outlets							
							
09330 2P 6 A 24 V (SELV), for 01620 plug. Depth: 25 mm				09330.CM 2P 6 A 24 V (SELV), for 01620 plug. Depth: 25 mm			
Phone socket outlets							
							
09320 RJ11, 6-position 4-contact (6/4). Depth: 33,6 mm				09320.CM RJ11, 6-position 4-contact (6/4). Depth: 33,6 mm			
							
09324 Israeli stan- dard, screw terminals. Depth: 33,4 mm				09324.CM Israeli stan- dard, screw terminals. Depth: 33,4 mm			

Signal reception socket

White			Carbon Matt						
Coaxial TV-RD-SAT 5-2400 MHz socket outlets (output Ø 9,5 mm male and F-type female)									
									
09300.01 Male, single connection 1 dB. Depth: 26,1 mm	09300.10 Male, through-line 10 dB. Depth: 26,1 mm	09302.01 Demix, male and F-type, single connection 1 dB - 2 modules. Depth: 22,1 mm	09300.01.CM Male, single connection 1 dB. Depth: 26,1 mm	09300.10.CM Male, through-line 10 dB. Depth: 26,1 mm	09302.01.CM Demix, male and F-type, single connection 1 dB - 2 modules. Depth: 22,1 mm				
Coaxial TV-FM-SAT 5-2400 MHz socket outlets (3 outputs: Ø 9,5 mm male and female + F-type)									
									
09303 Single connection 1 dB - 2 modules. Depth: 22 mm			09303.CM Single connection 1 dB - 2 modules. Depth: 22 mm						
Coaxial TV 40-862 MHz socket outlets (1 output: Ø 9,5 mm female) and F-type socket outlets									
									
*09313 Single connection. Depth: 29 mm	09318 With F-type female connector. Depth: 9 mm		*09313.CM Single connection. Depth: 29 mm	09318.CM With F-type female connector. Depth: 9 mm					
Terminal resistors and coaxial TV-RD-SAT 2400 MHz connectors									
									
16330 Z 75 Ω, for frequencies up to 2400 MHz	01644 Male, axial cable entry	01645 Female, axial cable entry	01634 Male, 90°-cable entry	01635 Female, 90°-cable entry	01654 Male, F-type, for RG59 cable				
RJ45 data ports									
									
09338.9 Netsafe, Cat. 5e, UTP. Depth: 26 mm	09339.6 Netsafe, Cat. 6, UTP 110. Depth: 34,2 mm	09339.14 Netsafe, Cat. 6, FTP. Depth: 39,7 mm	09339.16 Netsafe, Cat. 6a, FTP. Depth: 39,7 mm	Δ 09338.C Adaptor, RJ45 Cat. 5/6 AMP, Keystone, Lucent T. Depth: 9 mm	09338.9.CM Netsafe, Cat. 5e, UTP. Depth: 26 mm	09339.6.CM Netsafe, Cat. 6, UTP 110. Depth: 34,2 mm	09339.14.CM Netsafe, Cat. 6, FTP. Depth: 39,7 mm	09339.16.CM Netsafe, Cat. 6a, FTP. Depth: 39,7 mm	Δ 09338.C.CM Adaptor, RJ45 Cat. 5/6 AMP, Keystone, Lucent T. Depth: 9 mm

White	Carbon Matt
Keystone universal adaptors	
 ▲09339.C Adaptor, Keystone. Depth: 9 mm	 ▲09339.C.CM Adaptor, Keystone. Depth: 9 mm
Electromechanical bells - Buzzers	
 ▲ 09372.SR Ringtone/buzzer 120 V~ 50-60 Hz. Depth: 31.8 mm	 ▲ 09372.SR.CM Ringtone/buzzer 120 V~ 50-60 Hz. Depth: 31.8 mm
 ▲ 09373.SR Ringtone/buzzer 230 V~ 50-60 Hz. Depth: 31.8 mm	 ▲ 09373.SR.CM Ringtone/buzzer 230 V~ 50-60 Hz. Depth: 31.8 mm
Double pilot lights (for signalling unit)	
 09388 Dual indicator light for 2 signalling units, neutral diffusers Depth: 23 mm	 09388.CM Dual indicator light for 2 signalling units, neutral diffusers Depth: 23 mm
TORCIA, electronic hand-lamps (with automatic emergency device)	
 09395 With high-efficiency LED, 230 V~ 50/60 Hz - 2 modules. Depth: 41,3 mm	 09395.CM With high-efficiency LED, 230 V~ 50/60 Hz - 2 modules. Depth: 41,3 mm
	 00910 Ni-MH 4,8 V 80 mAh battery, spare part for TORCIA
Thermostats and timer-thermostats (heating and air-conditioning)	
 09470 Rotary dial thermostat for ambient temperature control, 5(2) A 240 V~ relay output, heating and air-conditioning ON/OFF, class I temperature control device (contribution 1%) in ON/OFF mode, white LED backlighting and brightness regulation, 100-240 V 50/60 Hz - 2 modules. Depth: 28,5 mm	 09470.CM Rotary dial thermostat for ambient temperature control, 5(2) A 240 V~ relay output, heating and air-conditioning ON/OFF, class I temperature control device (contribution 1%) in ON/OFF mode, white LED backlighting and brightness regulation, 100-240 V 50/60 Hz - 2 modules. Depth: 28,5 mm
 02900.1 Electronic thermostat for ON/OFF ambient temperature control (heating and air-conditioning), class I temperature control device (contribution 1%), change-over relay output 5(2) A 240 V~, AA LR6 1,5 V battery-powered (not supplied), surface mounting, white	 01910 Electronic timer-thermostat for ON/OFF ambient temperature control (heating and air-conditioning), daily/weekly programming, class I temperature control device (contribution 1%), change-over relay output 5(2) A 250 V~, AA LR6 1,5 V battery-powered (not supplied), surface mounting, white

White	Carbon Matt
Switches for can coil speed adjustment	
 09063 2P 10 AX 250 V~ switch for fan coil	 09063.CM 2P 10 AX 250 V~ switch for fan coil
Hotel solutions	
 09026.DND 1-module interchangeable button, Do Not Disturb, with diffuser, lightable	 09026.DND.CM 1-module interchangeable button, Do Not Disturb, with diffuser, lightable
 09026.PLS 1-module interchangeable button, Please Clean, with diffuser, lightable	 09026.PLS.CM 1-module interchangeable button, Please Clean, with diffuser, lightable
 09388.SC Double room status indicator for 2 signalling units: do not disturb and make up room	 09388.SC.CM Double room status indicator for 2 signalling units: do not disturb and make up room
 09097 1P NO 10 A 230 V~ push button, for hotel "Do Not Disturb" and "Please Clean" lighttable - 2 modules. Depth: 27,2 mm	
 *09257 2P+E 13 A 250 V~ SUCURY socket outlet, multistandard - 2 modules. Depth: 18,7 mm	 *09257.CM 2P+E 13 A 250 V~ SUCURY socket outlet, multistandard - 2 modules. Depth: 18,7 mm
 09290 Shaver supply unit with 20 VA isolating transformer, 230 V~ 50/60 Hz, 230 V~ and 120 V~ outputs - 3 modules. Depth: 42 mm	 09290.CM Shaver supply unit with 20 VA isolating transformer, 230 V~ 50/60 Hz, 230 V~ and 120 V~ outputs - 3 modules. Depth: 42 mm
 09463 Electronic switch, vertical pocket, 120-230 V~ 50/60 Hz - 2 modules. Depth: 24,7 mm	 09463.CM Electronic switch, vertical pocket, 120-230 V~ 50/60 Hz - 2 modules. Depth: 24,7 mm
 09465 Electronic switch, vertical pocket, 230 V~ 50/60 Hz, 24 V~/24 Vdc (SELV) - 3 modules. Depth: 37 mm	 09465.CM Electronic switch, vertical pocket, 230 V~ 50/60 Hz, 24 V~/24 Vdc (SELV) - 3 modules. Depth: 37 mm

NEVE UP

View Wireless Smart home



White	Carbon Matt
-------	-------------

Gateway



09597
IoT Bluetooth Wi-Fi Gateway for integration, configuration, supervision of VIEW Wireless, via Cloud and App for smartphone, tablet, 100-240 V 50/60 Hz power supply - 2 modules
Depth: 37.2 mm



09597.CM
IoT Bluetooth Wi-Fi Gateway for integration, configuration, supervision of VIEW Wireless, via Cloud and App for smartphone, tablet, 100-240 V 50/60 Hz power supply - 2 modules
Depth: 37.2 mm



OK14597.01
Wi-Fi Bluetooth wireless technology gateway for integration, configuration and supervising of View Wireless system by Cloud and app for smartphone and tablet, supply voltage 100-240 V 50/60 Hz, on DIN (60715 TH35) rail installation, occupies 2 17,5 mm modules

Connected 2-way switch for lights



09592
VIEW Wireless electronic 2-way switch with 100-240 V 50/60 Hz relay output for 500 W incandescent lamps, 100W LED lamps, 250 VA electronic transformers, 120 W fluorescent lamps, local or remote control, double IoT technology on Bluetooth 5.0 standard for the creation of VIEW Wireless mesh system and on Zigbee 3.0 standard, 1 input for external button for actuator control or to recall a scenario, RGB LED visible in darkness with brightness control, 100-240 V 50/60 Hz power supply
Depth: 37.9 mm



09592.2
As for 09592, 2 modules
Depth: 37.9 mm



09592.CM
VIEW Wireless electronic 2-way switch with 100-240 V 50/60 Hz relay output for 500 W incandescent lamps, 100W LED lamps, 250 VA electronic transformers, 120 W fluorescent lamps, local or remote control, double IoT technology on Bluetooth 5.0 standard for the creation of VIEW Wireless mesh system and on Zigbee 3.0 standard, 1 input for external button for actuator control or to recall a scenario, RGB LED visible in darkness with brightness control, 100-240 V 50/60 Hz power supply
Depth: 37.9 mm



09592.2.CM
As for 09592.CM, 2 modules
Depth: 37.9 mm



NEVE UP

View Wireless Smart home



White	Carbon Matt
-------	-------------

Connected controls for roller shutters



09594.0
VIEW Wireless electronic control device for 1 roller shutter with slat orientation and change-over relay output for cosφ 0.6 motor 2 A 100-240 V~ 50/60 Hz, local control with push button or remote control, double IoT technology on Bluetooth® technology 5.0 standard for the creation of VIEW Wireless mesh system and on Zigbee 3.0 standard, 1 input for external push button to recall a scenario, favourite position recall function, RGB LED visible in darkness with brightness control, 100-240 V 50/60 Hz power supply, to be completed with two interchangeable half-button caps, 1 Neve UP module.
Depth: 37.9 mm



09755.2
Two 1-module interchangeable arrow symbol half-button caps, 1 module



09755.2.CM
Two 1-module interchangeable arrow symbol half-button caps, 1 module

Connected actuator for roller shutters



03982
Actuator for 1 roller shutter with slat orientation and change-over relay output for cosφ 0,6 motor 2 A 100-240 V~ 50/60 Hz, remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0

Connected dimmers



09595.0
VIEW Wireless electronic dimmer mechanism for 20-200 W incandescent lamps, 2-200 W LED lamps, 20-200 W electronic transformers, double IoT technology on Bluetooth 5.0 standard for the creation of VIEW Wireless mesh system and on Zigbee 3.0 standard, 1 input for external push button for dimmer control or to recall a scenario, dimmer off operation, RGB LED visible in darkness with brightness control, 220-240 V 50/60 Hz power supply, to be completed with Neve UP 1-module interchangeable buttons
Depth: 37.8 mm



09595.0.120
VIEW Wireless electronic dimmer mechanism for 20-200 W incandescent lamps, 2-200 W LED lamps, 20-200 W electronic transformers, double IoT technology on Bluetooth 5.0 standard for the creation of VIEW Wireless mesh system and on Zigbee 3.0 standard, 1 input for external push button for dimmer control or to recall a scenario, RGB LED visible in darkness with brightness control, 120 V 50/60 Hz power supply, to be completed with Neve UP 1-module interchangeable buttons
Depth: 37.8 mm

NEVE UP

View Wireless Smart home



White	Carbon Matt
-------	-------------

Connected electronic control

Bluetooth



09591.0
VIEW Wireless electronic control mechanism, local control with push button or remote control, double IoT technology on Bluetooth 5.0 standard for the creation of VIEW Wireless mesh system and on Zigbee 3.0 standard, RGB LED visible in darkness with brightness control, 100-240 V 50/60 Hz power supply, to be completed with Neve UP 1-module interchangeable buttons.
Depth: 37.9 mm

 09755 Two interchangeable half-button caps, neutral, 1 module	 09755.2 Two interchangeable half-button caps, arrow symbol, 1 module	 09755.3 Two interchangeable half-button caps, dimmer symbols, 1 module	 09755.6 Two interchangeable half-button caps, scenario symbols, 1 module
 09755.CM Two interchangeable half-button caps, neutral, 1 module	 09755.2.CM Two interchangeable half-button caps, arrow symbol, 1 module	 09755.3.CM Two interchangeable half-button caps, dimmer symbols, 1 module	 09755.6.CM Two interchangeable half-button caps, scenario symbols, 1 module

Connected socket outlet actuators

Bluetooth Zigbee



09593
VIEW Wireless electronic control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, double IoT technology on Bluetooth 5.0 standard for the creation of VIEW Wireless mesh system and on Zigbee 3.0 standard, function for measuring the instant power and energy consumed and load cut-off threshold, RGB LED visible in darkness with brightness control, 100-240 V 50/60 Hz power supply. Depth: 37.8 mm



09593.CM
VIEW Wireless electronic control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, double IoT technology on Bluetooth 5.0 standard for the creation of VIEW Wireless mesh system and on Zigbee 3.0 standard, function for measuring the instant power and energy consumed and load cut-off threshold, RGB LED visible in darkness with brightness control, 100-240 V 50/60 Hz power supply. Depth: 37.8 mm

Connected actuator

Bluetooth Zigbee



03981
Control device with NO 100-240 V 50/60 Hz relay output for 500 W incandescent lamps, 100 W LED lamps, 250 VA electronic transformers, 120 W fluorescent lamps, remote control, 1 input for wired control to recall a scenario, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0

NEVE UP

View Wireless Smart home



White	Carbon Matt
-------	-------------

Connected Energy meter

Bluetooth



02963
IoT device for consumption meter/production of instantaneous electricity and consumption logs (with hourly, daily, monthly, annual resolution), load control function (max 8 loads), 1 input for toroidal current sensor supplied, detectable power 25 W-10 kW, single-phase power supply 100-240 V 50/60 Hz, IoT technology on Bluetooth technology 5.0 standard for the creation of VIEW Wireless mesh system, installation on DIN rail (60715 TH35), occupies 1 module measuring 17.5 mm.

Connected thermostats

Bluetooth



09473
Rotary dial thermostat for ambient temperature control, 5(2) A 240 V~ relay output, IoT technology on Bluetooth® wireless technology 5.0 for mesh View Wireless system realization, 1 input for outer temperature sensor, heating and air-conditioning ON/OFF and PID, class I temperature control device (contribution 1%) in ON/OFF mode, class IV (contribution 2%) in PID mode, white LED backlighting and brightness regulation, supply voltage 100-240 V~ 50/60 Hz - 2 modules. Depth: 28,5 mm



09473.CM
Rotary dial thermostat for ambient temperature control, 5(2) A 240 V~ relay output, IoT technology on Bluetooth® wireless technology 5.0 for mesh View Wireless system realization, 1 input for outer temperature sensor, heating and air-conditioning ON/OFF and PID, class I temperature control device (contribution 1%) in ON/OFF mode, class IV (contribution 2%) in PID mode, white LED backlighting and brightness regulation, supply voltage 100-240 V~ 50/60 Hz - 2 modules. Depth: 28,5 mm

Connected sensors

Bluetooth



03980
Magnetic contact for doors and windows, IoT technology on Bluetooth technology 5.0 standard for the creation of View Wireless mesh system, 1 input for voltage-free contact, powered by AA LR6 1.5 V batteries (not supplied), white. For use as an accessory of the connected thermostat or, in combination with the IoT gateway, as a sensor for magnetic contact or voltage-free contact input opening/closing notifications.

NEVE UP

View Wireless Smart home



White	Carbon Matt
-------	-------------

Connected radar sensor



09179
UWB radar sensor, IoT technology on Bluetooth 5.0 standard for the creation of VIEW Wireless mesh system, 1 solid state output for extra low voltage controls (SELV and non SELV), 1 input for external push button for output activation or to recall a scenario, 100-240 V 50/60 Hz power supply
Depth: 39.9 mm



09179.CM
UWB radar sensor, IoT technology on Bluetooth 5.0 standard for the creation of VIEW Wireless mesh system, 1 solid state output for extra low voltage controls (SELV and non SELV), 1 input for external push button for output activation or to recall a scenario, 100-240 V 50/60 Hz power supply
Depth: 39.9 mm



02692
UWB radar sensor, IoT technology on Bluetooth 5.0 standard for the creation of VIEW Wireless mesh system, 1 solid state output for extra low voltage controls (SELV and non SELV), 1 input for external push button for output activation or to recall a scenario, 100-240 V 50/60 Hz power supply, false ceiling installation.



02692.S.1
Round section adaptor for ceiling installation of the IoT connected radar sensor 02692.

Connected access control



09462
NFC/RFID smart card landing reader, card configuration using View Wireless App, Bluetooth technology standard, IoT technology on Bluetooth technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 DND input, LED with brightness control, 100-240 V~ 50/60 Hz power supply - 2 modules. Depth: 32.5 mm



09462.CM
NFC/RFID smart card landing reader, card configuration using View Wireless App, Bluetooth technology standard, IoT technology on Bluetooth technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 DND input, LED with brightness control, 100-240 V~ 50/60 Hz power supply - 2 modules. Depth: 32.5 mm



09467
NFC/RFID smart card reader pocket for installation inside the room, IoT technology on Bluetooth technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 configurable input, LED visible in darkness with brightness control, 100-240 V~ 50/60 Hz power supply, Next - 2 modules. Depth: 32.5 mm



09467.C
Card holder cover for NFC/RFID reader pocket and badge switch, 2 modules.



09467.CM
NFC/RFID smart card reader pocket for installation inside the room, IoT technology on Bluetooth technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 configurable input, LED visible in darkness with brightness control, 100-240 V~ 50/60 Hz power supply, Next - 2 modules. Depth: 32.5 mm



09467.C.CM
Card holder cover for NFC/RFID reader pocket and badge switch, 2 modules.

NEVE UP

Accessori



White	Carbon Matt
-------	-------------

LED signalling units



12-24 V~ - 0,1 W

00935.A: amber
00935.G: green
00935.R: red
00935.B: blue
00935.W: white

120 V~ 50/60 Hz - 0,2 W

00936.120.A: amber
00936.120.G: green
00936.120.R: red
00936.120.B: blue
00936.120.W: white

250 V~ 50/60 Hz - 0,35 W

00936.250.A: amber
00936.250.G: green
00936.250.R: red
00936.250.B: blue
00936.250.W: white

Accessories for floor mounting



V54303
Floor mount turret for Neve Up devices installation in V54903 box.
Supplied with 3-module mounting frame




V54903
Flush box for floor mount turret V54303

IP40 enclosures




▲ 09802
2 modules



▲ 09802




▲ 09803
3 modules



▲ 09803



▲ 09804
4 modules




▲ 09804

IP55 enclosures




▲ 09902
2 modules



▲ 09902




▲ 09903
3 modules



▲ 09903



▲ 09904
4 modules



▲ 09904


IP55 covers



▲ 09911.01
with claws, for ø 60 mm boxes, white - 2 modules



▲ 09911.04
with claws, for ø 60 mm boxes, black - 2 modules




▲ 09911..



▲ 09912.01
with screws, for mounting boxes with 60 mm distance between centres, white - 2 modules



▲ 09912.04
with screws, for mounting boxes with 60 mm distance between centres, black - 2 modules




▲ 09912..



09913.01
with screws, for mounting boxes 3 modules, white - 3 modules




09913.04
with screws, for mounting boxes 3 modules, black - 3 modules




09913..



09914.01
with screws, for mounting boxes 4 modules, white - 4 modules



09914.04
with screws, for mounting boxes 4 modules, black - 4 modules



09914..

Glossy
(Technopolymer)



01 White (Total Look)



02 Ivory




03 Slate grey



04 Black

Matt
(Matt painted technopolymer)

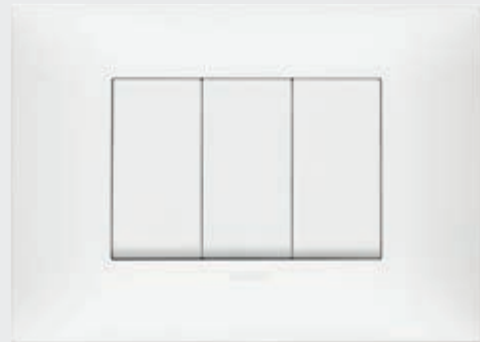


11 Matt white



12 Matt dove grey




13 Matt clay

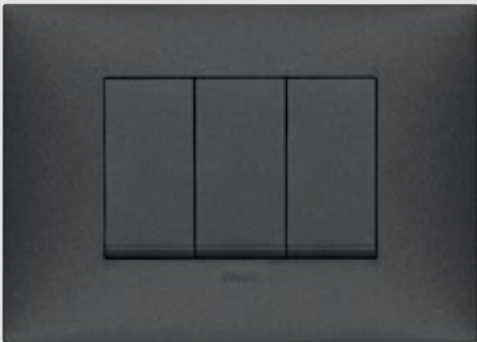

14 Carbon matt (Total Look)

Metal
(Metallic painted technopolymer)

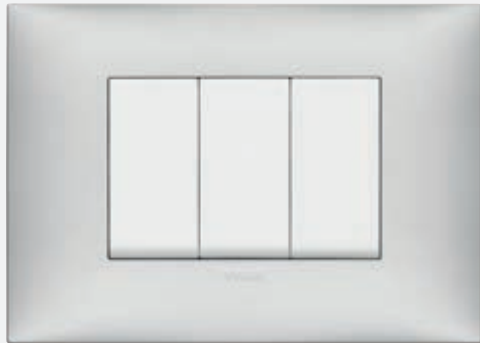

21 Matt silver



22 Matt nickel






23 Matt titanium





24 Matt copper

	1-central-module	2-module	1-central-module	2-separate-module	2-central-module	3-module
						
Glossy (Technopolymer)						
 White (Total Look)	09661.01	09662.01	09671.01	09679.01	09672.01	09673.01
 Ivory	09661.02	09662.02	09671.02	09679.02	09672.02	09673.02
 Slate grey	09661.03	09662.03	09671.03	09679.03	09672.03	09673.03
 Black	09661.04	09662.04	09671.04	09679.04	09672.04	09673.04
Matt (Matt painted technopolymer)						
 Matt white	09661.11	09662.11	09671.11	09679.11	09672.11	09673.11
 Matt dove grey	09661.12	09662.12	09671.12	09679.12	09672.12	09673.12
 Matt clay	09661.13	09662.13	09671.13	09679.13	09672.13	09673.13
 Carbon matt (Total Look)	09661.14	09662.14	09671.14	09679.14	09672.14	09673.14
Metal (Metallic painted technopolymer)						
 Matt silver	09661.21	09662.21	09671.21	09679.21	09672.21	09673.21
 Matt nickel	09661.22	09662.22	09671.22	09679.22	09672.22	09673.22
 Matt titanium	09661.23	09662.23	09671.23	09679.23	09672.23	09673.23
 Matt copper	09661.24	09662.24	09671.24	09679.24	09672.24	09673.24



















3-blank-module	4-module	7-module	2+2-module (between centres 71 mm)	2+2+2-module (between centres 71 mm)	2+2+2+2-module (between centres 71 mm)
					
09670.01	09674.01	09677.01	09664.01	09666.01	09668.01
09670.02	09674.02	09677.02	09664.02	09666.02	09668.02
09670.03	09674.03	09677.03	09664.03	09666.03	09668.03
09670.04	09674.04	09677.04	09664.04	09666.04	09668.04
09670.11	09674.11	09677.11	09664.11	09666.11	09668.11
09670.12	09674.12	09677.12	09664.12	09666.12	09668.12
09670.13	09674.13	09677.13	09664.13	09666.13	09668.13
09670.14	09674.14	09677.14	09664.14	09666.14	09668.14
09670.21	09674.21	09677.21	09664.21	09666.21	09668.21
09670.22	09674.22	09677.22	09664.22	09666.22	09668.22
09670.23	09674.23	09677.23	09664.23	09666.23	09668.23
09670.24	09674.24	09677.24	09664.24	09666.24	09668.24

Module	Box	Frame	Cover plate*
2-central for ø 60 mm and 3-module mounting box	 V71001 For masonry GW 650 °C, light blue V71001.AU GW 960 °C, black	 V71701 For hollow walls, for frame without claws, GW 850 °C, light blue	 09606 2-central module, for horizontal installation
	 V71303 For masonry GW 650 °C, light blue V71303.AU GW 960 °C, black	 V71703 For hollow walls, GW 850 °C, light blue	 09607 2-central module, for vertical installation
	 4x2" mounting box		 09672... 2-central-module, for horizontal and vertical installation. Dimensions: 120x86x8,5 mm
3	 4x2" mounting box	 09613 3-module	 09671... 1-central-module. Dimensions: 120x86x8,9 mm
	 V71303 For masonry GW 650 °C, light blue V71303.AU GW 960 °C, black	 V71703 For hollow walls, GW 850 °C, light blue	 09623 3-module, to use for installation of Plana devices
			 09679... 2-separate-module. Dimensions: 120x86x9 mm

Module	Box	Frame	Cover plate*
3	 4x2" mounting box	 09613 3-module	 09673... 3-module. Dimensions: 120x86x8,5 mm
	 V71303 For masonry GW 650 °C, light blue V71303.AU GW 960 °C, black	 V71703 For hollow walls, GW 850 °C, light blue	 09623 3-module, to use for installation of Plana devices
			 09670... Blank module. Dimensions: 120x86x9,8 mm
4	 V71304 For masonry GW 650 °C, light blue V71304.AU GW 960 °C, black	 V71704 For hollow walls, GW 850 °C, light blue	 09614 4-module
			 09674... 4-module. Dimensions: 142,4x86x8,4 mm
7	 V71306 For masonry GW 650 °C, light blue V71306.AU GW 960 °C, black	 V71706 For hollow walls, GW 850 °C, light blue	 09617 7-module
			 09677... 7-module. Dimensions: 210x86x8,4 mm

* Cover plates range, page 64


Types of mounting: German/French standard

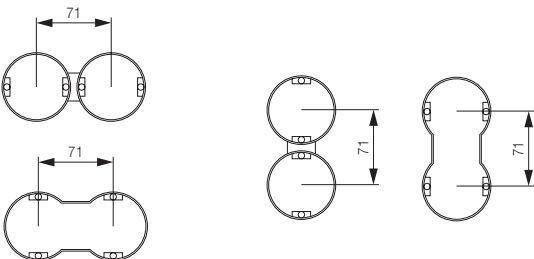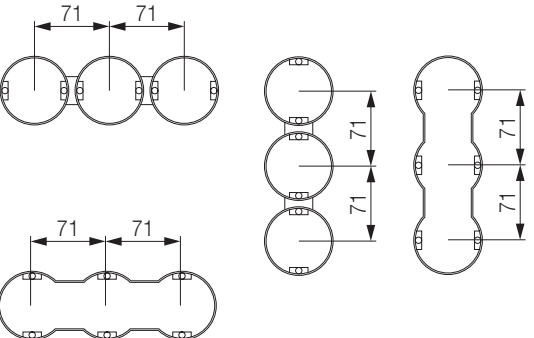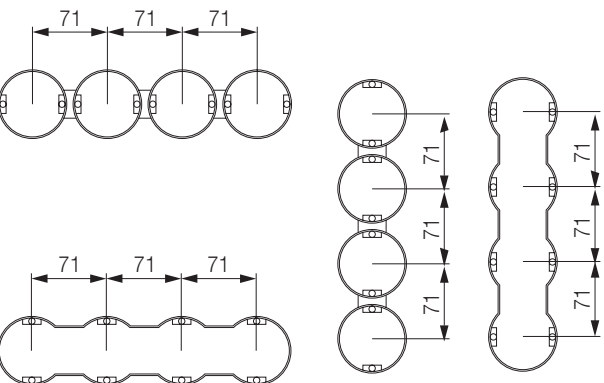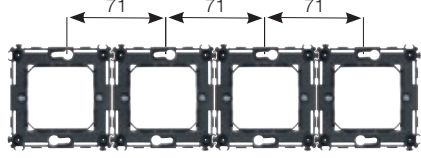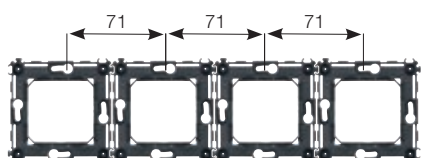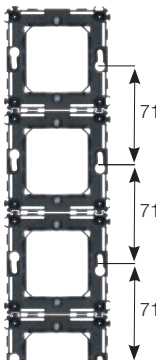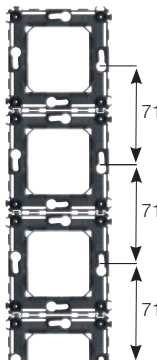Module	Box	Frame	Cover plate*
1 for ø 60 mm mounting box	 V71001 For masonry GW 650 °C, light blue V71001.AU GW 960 °C, black	 09602.1 2-module, with claws  09603.1 2-module, without screws	 09661... 1-central-module. Dimensions: 86x86x8,8 mm
2 for ø 60 mm mounting box	V71701 For hollow walls, for frame without claws, GW 850 °C, light blue	 09602.1 2-module, with claws  09603.1 2-module, without screws	 09662... 2-module. Dimensions: 86x86x8,5 mm
2+2 71 mm between centres		 2 x 09602.1 2-module, with claws  2 x 09603.1 2-module, without screws  2 x 09602.1 2-module, with claws  2 x 09603.1 2-module, without screws	 09664... 4-module (2+2), for horizontal and vertical installation. Dimensions: 157x86x8,5 mm 
2+2+2 71 mm between centres		 3 x 09602.1 2-module, with claws  3 x 09603.1 2-module, without screws  3 x 09602.1 2-module, with claws  3 x 09603.1 2-module, without screws	 09666... 6-module (2+2+2), for horizontal and vertical installation. Dimensions: 228x86x8,5 mm 
2+2+2+2 71 mm between centres		 4 x 09602.1 2-module, with claws  4 x 09603.1 2-module, without screws  4 x 09602.1 2-module, with claws  4 x 09603.1 2-module, without screws	 09668... 8-module (2+2+2+2), for horizontal and vertical installation. Dimensions: 299x86x8,5 mm 

Cover plates and devices customisation

Cover plates: customisation positions

(see area in grey)



Example of customised cover plate



Controls and buttons: positions and features

Type	Customisation position*	Backlit customisation	Not backlit customisation
1-module controls and interchangeable buttons		NO	The entire button area can be customised
Lightable 1-module controls and interchangeable buttons 09021.N and 09021.N.CM		NO	positions 1 and 2
Lightable 1-module controls and interchangeable buttons 09021.G and 09021.G.CM		position 3	positions 1 and 2
2-module controls and interchangeable buttons		NO	The entire button area can be customised
Lightable 2-module controls and interchangeable buttons 09022.N and 09022.N.CM		NO	positions 1, 2 and 3

* when position is not indicated, the customization is possible in the whole area of the button/control

Indications for customisation

- all devices, buttons and cover plates are customized depending on conditions described below;
- if the required customisation is including in the 'Library of standard symbols and wording', indicate the item code + symbol/wording code, **if the customisation is not included in the table check its feasibility with the sales network.**
- the **visible in darkness** customization is possible only in symbol engraved buttons and with diffuser (e. g. 09021.G and 09021.G.CM).

The few limits of technology

- it is not possible to reproduce coloured images.

What to supply

- an image in EPS or DXF format of the subject to be reproduced, minimum line width and minimum distance between lines: 0.5 mm.

How to proceed

- deliver all the documentation to your area wholesaler/distributor, who will then forward it to Vimar.

Example of customised controls and buttons



Neve Up - White: backlighting controls and interchangeable buttons



Neve Up - Carbon matt: backlighting controls and interchangeable buttons

Library of standard symbols and wording (♦ symbols already on product catalogue visible in darkness)

ACCESSES	 ♦ S14.001	 S14.002	 S14.003	 ♦ S14.117	 S14.094	 S14.095	 S14.096	 S14.097	 S14.098	 S14.099	 S14.100			
LIGHTING	 S14.004	 S14.005	 S14.006	 S14.007	 S14.008	 S14.009	 S14.010	 S14.011	 S14.012	 S14.013	 S14.014	 S14.015	 S14.016	 S14.017
	 S14.018	 S14.019	 S14.020	 S14.021	 S14.022	 S14.023	 S14.024	 S14.025	 S14.026	 S14.027	 S14.028	♦ S14.029	 S14.030	 S14.031
	 S14.032	 S14.033	 S14.034	 S14.035	 S14.036	 S14.037	 S14.038	 S14.039	 S14.040	 S14.041	 S14.042	 S14.043	 S14.044	 S14.045
	 S14.046	 S14.047	 S14.048	 S14.049	 S14.050	 S14.051	 S14.052	 S14.053	 S14.054	 S14.055	 S14.056			
ROLLER SHUTTERS	 S14.057	 S14.058	♦ S14.059	♦ S14.060	 S14.061	 S14.062	 S14.063	 S14.064	 S14.065	 S14.066	 S14.067	 S14.068	 S14.069	 S14.070
	 S14.071	 S14.072	 S14.073	 S14.074	 S14.075	 S14.076	 S14.077	 S14.078	 S14.079	 S14.080	 S14.081	 S14.082	 S14.083	 S14.084
	 S14.085	 S14.086	 S14.087	 S14.088	 S14.089	 S14.090	 S14.091	 S14.092	 S14.093	 S14.101	 S14.102	 S14.103	 S14.104	
	 S14.105	 S14.106	 S14.107	 S14.108	 S14.109	 S14.110	 S14.111	 S14.112						
CLIMATE	 ♦ S14.125	 S14.126	♦ S14.126B	 S14.127	 S14.162	IRRIGATION			 S14.119	 S14.120	 S14.121	 S14.122	 S14.123	 S14.124
SCENARIOS	 S14.128	 S14.129	 S14.130	 S14.131	 S14.132	 S14.133	 S14.134	 S14.135	 S14.136	 S14.137	 S14.138	 S14.139	 S14.140	
	 S14.141	 S14.142	 S14.143	 S14.144	 S14.145	 S14.146	 S14.147	 S14.148						
MUSIC AND AUDIO	 S14.149	 S14.150	 S14.151	 S14.152	 S14.153	 S14.154	 S14.155	 S14.156	 S14.157	 S14.158	 S14.159	 S14.160	 S14.161	
NUMBERS AND TEXTS	0 S14.176	1 S14.177	2 S14.178	3 S14.179	4 S14.180	5 S14.181	6 S14.182	7 S14.183	8 S14.184	9 S14.185	make up room S14.186	do not disturb S14.187	light S14.188.EN	
	open S14.189.EN	close S14.190.EN	alarm S14.191.EN	come in S14.192.EN	back S14.193.EN	stairs S14.194.EN	bathroom S14.195.EN	cellar S14.196.EN	storeroom S14.197.EN	attic S14.198.EN	terrace S14.199.EN	outside S14.200.EN	garden S14.201.EN	
	garage S14.202	general S14.203.EN												
HOTEL	 S14.163	 S14.164	 S14.165	 S14.166	 S14.167	 S14.168	 S14.169	 S14.170	 S14.171	 S14.172	 S14.173	 S14.174	 S14.175	

Smart card customization

The rear of the card can be customised on request, by providing a digital image of the subject in eps, tiff or jpg format.





Beauty. Energy. Life


Since 1945 our energy is driven by passion and are engaged in supporting the evolution of living styles. The heart of our company, where we create, design, manufacture and test all our products, is in the North East of Italy. We continue manufacturing here at Marostica: from materials to shapes, colour combinations to electronic processes, we are distinguished by quality, style and technology that speak our language all over the world. A long tradition and history of success, a culture based on solid and true values.

Research. Technology. Simplicity

To ensure the best of technology and design, 6% of our annual turnover is invested in R&D. This has allowed us over the years to lodge more than 180 patents worldwide, reflecting the attention of the great innovation like the little details that make every day life more simple and comfortable. We firmly believe that new ideas are created to be shared.


Taking care of the process

Our manufacturing cycle is characterized by low environmental impact. We recycle 60% of the plastic material waste and most of the metal. We only use water-based paints or UV curing. We are replacing the electroplating bath with the innovative and more environmentally friendly MSD process that eliminates any type of harmful emissions.

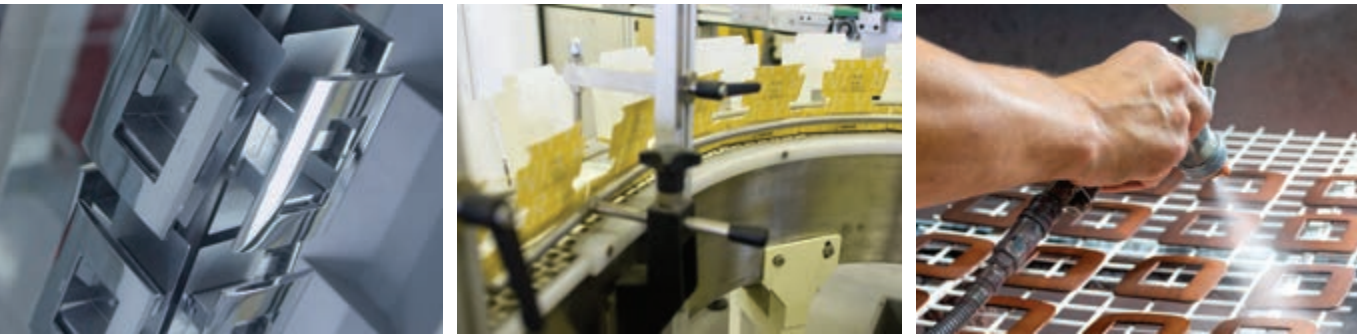

SICURY patent

On 15 March 1968 we patented our idea for the SICURY shutter, an essential device for ensuring the safety of electrical systems and protecting sockets, by preventing users from making involuntary contact with live parts. And since we firmly believe that new ideas are created to be shared, we decided to grant all the operators in the industry the right to use our patent free of charge, making SICURY a market standard that has been making the lives of children and their parents a little safer for the past 50 years.

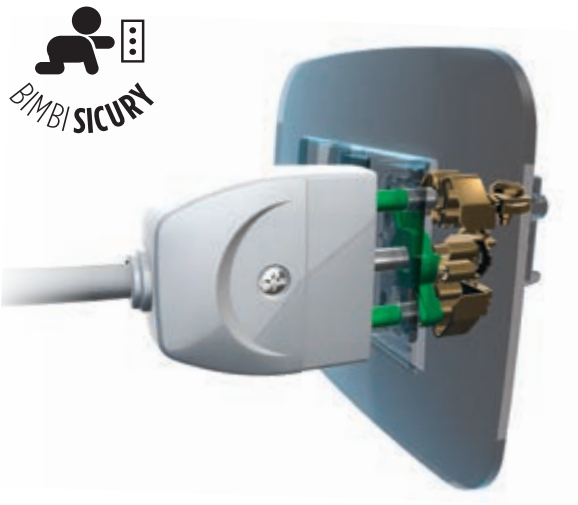

Energia Positiva. Insieme



VIMAR