




Shared components: Device 4inputs/outs KNX

01522.1

Smart systems&products / KNX / Shared components / DIN devices

Device 4inputs/outs KNX

Device with 4 inputs/outputs, 4 NO relay outputs 16 A 250 V~, programmable with control function for lights, roller shutters with slat orientation, push buttons for local control, 4 programmable digital inputs for potential-free contacts, KNX standard, installation on DIN rail (60715 TH35), occupies 4 modules size 17.5 mm


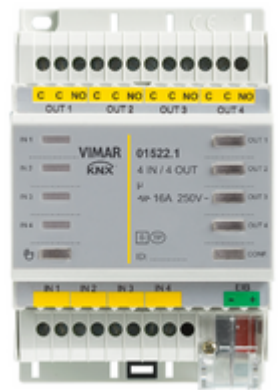


3 - Active

1 NR

- [Multilanguage instructions sheet \(928 kb\)](#)
- [Manuale installatore \(3360 kb\)](#)
- [Manuale installatore \(3307 kb\)](#)

- [DB_ComponentiAutomazione_KNX_01.16_20210920.zip](#)
- [DB_ComponentiAutomazione_KNX_01.19_20230331.zip](#)



3D

- **Class group:** Installation bus systems
- **Class:** I/O device for bus system
- **Bus system KNX:** Yes
- **Bus system KNX-RF (Radio Frequent):** No
- **Bus system radio frequent:** No
- **Bus system LON:** No
- **Bus system Powernet:** No
- **Width in number of modular spacings:** 4
- **With bus connection:** Yes

- **LED controlling:** Yes
- **With LED indication:** Yes
- **Local operation/hand operation:** Yes
- **Suitable for C-load:** No
- **With switch function:** Yes
- **Rated current:** 16,00 A
- **External signal voltage necessary:** No
- **Different phases connectable:** Yes

- 00. CE Marking - EU
- 27. KNX ([download](#))
- 43. UKCA mark - Great Britain

- 92. RoHS UAE
- 99. WEEE Directive ([download](#))



8007352644342
 1 NR
 11.7x10.8x7.1 [cm]
 283 [g]