




EIKON: LED emergency lamp 120V Eikon Evo 7M

02661.120

Wiring devices / Traditional wiring devices / EIKON / Devices

LED emergency lamp 120V Eikon Evo 7M




Emergency lighting device with high-efficiency LED, supply voltage 120 V~ 50-60 Hz, rechargeable Ni-Cd battery, built-in mounting frame for 6/7-module flush mounting boxes. To complete with Eikon Evo cover plate

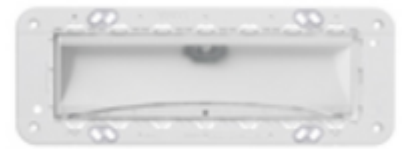

2 - Will be discontinued

1 NR

- [FI - Foglio istruzioni ZIS_49400440B0 \(977 kb\)](#)



3D

- **Class group:** Luminaires
- **Class:** Emergency luminaire
- **Monitoring equipment:** None
- **With remote switch connection:** Yes
- **Power supply system:** Peripheral (individual battery)
- **Battery quality:** NiCd
- **Lamp type:** LED not exchangeable
- **With light source:** Yes
- **Housing colour:** White
- **Voltage type:** AC

- **Nominal voltage:** 120,00 - 120,01 V
- **Degree of protection (IP):** IP40
- **Protection class:** II
- **Max. system power:** 5,00 W
- **Rated luminous flux according to IEC 62722-2-1:** 75
- **Width:** 206,00 mm
- **Height/depth:** 70,60 mm
- **Length:** 73,00 mm
- **Built-in width:** 197,00 mm
- **Built-in height/depth:** 43,00 mm

- 00. CE Marking - EU
- 37. Marking - Morocco

- 43. UKCA mark - Great Britain
- 99. WEEE Directive ([download](#))



8007352424166
 1 NR
 22.5x9.7x10 [cm]
 396.6 [g]

Vimar