PLANA: 1P+N C10 RCBO 120-230V 10mA white

14411.10

Wiring devices / Traditional wiring devices / PLANA / Devices

1P+N C10 RCBO 120-230V 10mA white

1P+N C 10 residual current breaker with overcurrent protection, supply voltage 120-230 V~ 50-60 Hz, IΔn 10 mA, breaking capacity 3000 A, white - 2 modules

3 - Active

5 NR

, ,

- Multilanguage instructions sheet (688 kb)







3D

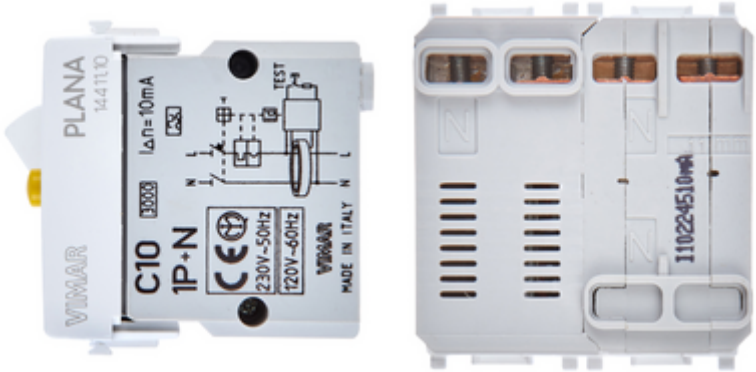

- **Class group**: Circuit breakers and fuses
- **Class**: Earth leakage circuit breaker
- **Number of poles (total)**: 2
- **Number of protected poles**: 1
- **Rated voltage**: 230 V
- **Rated current**: 10 A
- **Rated fault current**: 10 A
- **Leakage current type**: A
- **Current limiting class**: 1
- **Rated short-circuit breaking capacity Icn according to EN 61009-1**: 3.000,00 kA
- **Surge current capacity**: 3,00 kA
- **Voltage type**: AC
- **Frequency**: 50/60 Hz
- **Release characteristic**: C
- **Concurrently switching neutral conductor**: Yes
- **Over voltage category**: 3
- **Built-in depth**: 38,00 mm
- **Flush-mounted installation**: Yes
- **Anti-nuisance tripping version**: No
- **Degree of protection (IP)**: IP40

- 00. CE Marking - EU
- 01. IMQ - Italy (download)
- 37. Marking - Morocco
- 96. Electrotechnical expert (download)
- 99. WEEE Directive (download)

8 007352 107939

8007352107939
1 NR
6x5.4x5.3 [cm]
98.4 [g]

8 007352 107946

8007352107946
5 NR
17.2x13.1x6 [cm]
551.87 [g]

Vimar