



IDEA: 1P 16AX 2-way switch luminous grey

16025

Wiring devices / Traditional wiring devices / IDEA / Devices

1P 16AX 2-way switch luminous grey

1P 16 AX 250 V~ 2-way switch, luminous, for signalling unit, grey.





Provided without signalling unit. Max 200 W for self-ballasted lamps (IEC 60669-1:2017)



3 - Active



20 NR

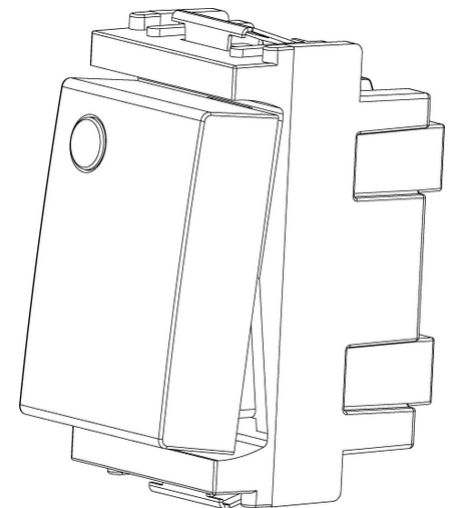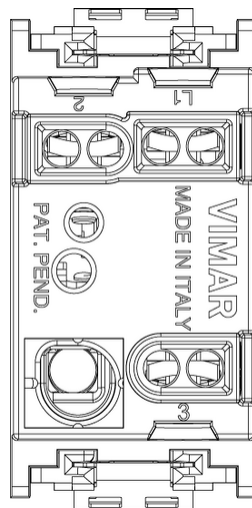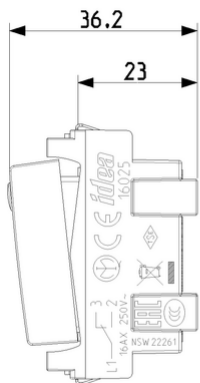

3D



- **00. CE Marking - EU**
- **01. IMQ - Italy**
- **14. TSE - Turkey ([download](#))**
- **15. CCC - China ([download](#))**
- **19. NOM - Mexico**
- **20. IQC - Argentina**
- **35. RCM - Australia**
- **37. Marking - Morocco**
- **96. Electrotechnical expert ([download](#))**
- **99. WEEE Directive ([download](#))**



Class group: Domestic switching devices

Class: Installation switch

Wiring system: Two-way switch

Operating method: Rocker/button

Assembly arrangement: Modular device for domestic switching devices

Number of modules (module system): 1

Push button switch: Yes

Number of rockers: 1

Mounting method: Flush-mounted

Type of fastening: Engage (snap)

With mounting plate: No

Material: Plastic

Material quality: Thermoplastic

Halogen free: Yes

Surface protection: Untreated

Surface finishing: Matt

Colour: Grey

RAL-number (similar): 7015

Label space/information surface: Yes

Lighting: Optional

Function lighting: Control and orientation

Type of lighting: LED exchangeable

Suitable for degree of protection (IP): IP40

Nominal voltage: 250 V

Rated current: 16,00 A

Monitoring contact: No

Connection type: Screwed terminal

Washing machine switch: No

Device width: 24,80 mm

Device height: 50,10 mm

Device depth: 36,50 mm

Built-in depth: 23,30 mm



8 007352 078246

8007352078246

Qtà 1 NR
 4.1x2.8x5.3 [cm]
 30 [g]



8 007352 078253

8007352078253

Qtà 20 NR
 21.4x11.6x6 [cm]
 657.33 [g]



8 007352 641136

8007352641136

Qtà 200 NR
 30.5x25.5x22.5 [cm]
 7,240 [g]



Vimar