




IDEA: Emergency lighting fitting 230V

16440

Wiring devices / Traditional wiring devices / IDEA / Devices

Emergency lighting fitting 230V

Emergency lighting fitting, 230 V~ 50-60 Hz, Ni-Cd rechargeable battery, provided with FD 4W G5 fluorescent lamp and mounting frame for 6/7-module flush mounting boxes. To complete with 6-module Classica or Rondò cover plates

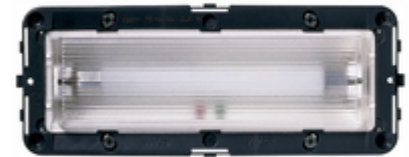

2 - Will be discontinued

1 NR

- [Multilanguage instructions sheet \(135 kb\)](#)

- **Class group:** Luminaires
- **Class:** Emergency luminaire
- **Mounting method:** Built-in
- **Monitoring equipment:** None
- **With remote switch connection:** No
- **Power supply system:** Peripheral (individual battery)
- **Battery quality:** NiCd
- **Lamp type:** Fluorescent lamp
- **With light source:** Yes
- **Housing material:** Plastic
- **Housing colour:** Grey
- **Material cover:** Without cover
- **Voltage type:** AC
- **Nominal voltage:** 230,00 - 230,01 V
- **Degree of protection (IP):** IP40
- **Protection class:** II
- **Max. system power:** 4,00 W
- **Rated luminous flux according to IEC 62722-2-1:** 26
- **Width:** 192,40 mm
- **Height/depth:** 57,70 mm
- **Built-in width:** 192,40 mm
- **Built-in height/depth:** 46,50 mm

- 00. CE Marking - EU
- 10. EAC Eurasian Customs Union
- 17. ENEC 03 (IMQ) ([download](#))
- 37. Marking - Morocco
- 43. UKCA mark - Great Britain
- 96. Electrotechnical expert ([download](#))
- 99. WEEE Directive ([download](#))



8007352099302
1 NR
21.4x6.6x9.3 [cm]
464.47 [g]

Vimar