



## ARKÉ: 2P+E 13A English outlet Metal

**19219.M**


Wiring devices / Traditional wiring devices / ARKÉ / Devices

### 2P+E 13A English outlet Metal

2P+E 13 A 250 V~ SICURY socket outlet, English standard, Metal - 2 modules




3 - Active

20 NR

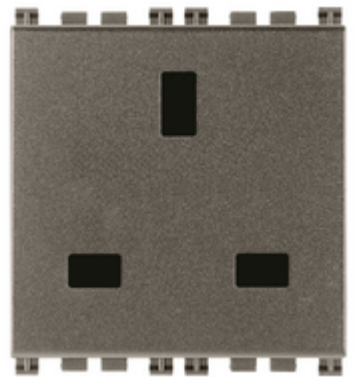

- [Multilanguage instructions sheet \(588 kb\)](#)

- [Arké lives in your time](#)



3D

- **Class group:** Domestic switching devices
- **Class:** Socket outlet
- **Model:** British Standard
- **Number of units:** 1
- **Number of modules (module system):** 2
- **Number of socket outlets switchable:** 0
- **Imprint/indication:** None
- **Connection type:** Screwed terminal
- **With hinged lid:** No
- **With enhanced contact protection:** Yes
- **Label space/information surface:** Yes
- **Colour:** Aluminium
- **RAL-number (similar):** 9007
- **Metallic colour:** No
- **Transparent:** No
- **Lockable:** No
- **Eject-mechanism:** No
- **Insulated mounting:** No
- **With function lighting:** No
- **With orientation lighting:** No

- 00. CE Marking - EU
- 08. ASTA - UK
- 30. G-Mark - Gulf Countries ([download](#))
- 37. Marking - Morocco

- **Over voltage protection:** No
- **Fault current protection:** No
- **Mounting method:** Flush-mounted
- **Material:** Plastic
- **Material quality:** Thermoplastic
- **Halogen free:** Yes
- **Surface protection:** Lacquered
- **Surface finishing:** Matt
- **With loop through function:** No
- **With on/off switch:** No
- **Rotated central insert:** No
- **Nominal current:** 13 A
- **Nominal voltage:** 250 V
- **Frequency:** 50,00 - 60,00 HZ
- **Suitable for degree of protection (IP):** IP20
- **Impact strength:** Other
- **Device width:** 44,80 mm
- **Device height:** 49,00 mm
- **Device depth:** 27,70 mm

- 43. UKCA mark - Great Britain
- 92. RoHS UAE
- 96. Electrotechnical expert ([download](#))
- 99. WEEE Directive ([download](#))



8007352596610  
1 NR  
5.1x2.8x5.3 [cm]  
44 [g]



8007352596627  
20 NR  
27x11.6x9 [cm]  
948.1 [g]