



EIKON: LED-emergency lamp 3M 120-230V grey


20384

Wiring devices / Traditional wiring devices / EIKON / Devices

LED-emergency lamp 3M 120-230V grey

Lamp with high-efficiency LED, supply voltage 120-230 V~ 50-60 Hz, automatic emergency device, 3 rechargeable AAA 1,2 V batteries, 1 hour of operating time, grey - 3 modules




- The battery is charged continuously when powered
- Battery charging time of 15 h, operating time after charging approximately 1 h
- Supply voltage: 120-230 V~ $\pm 10\%$, 50-60 Hz. Luminous flux: 22 lumen. Absorption: 0.5 W
- The lamp with LED provides auxiliary lighting in the event of a power failure; when the power returns, the lamp automatically switches off and the green LED is lit

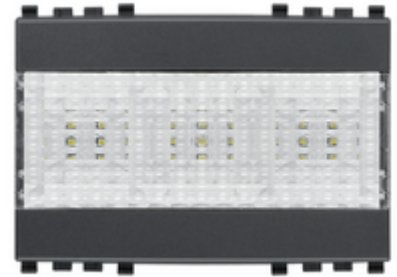

3 - Active

1 NR

- [Multilanguage instructions sheet \(992 kb\)](#)



3D



- **Class group:** Luminaires
- **Class:** Emergency luminaire
- **Mounting method:** Built-in
- **Monitoring equipment:** None
- **With remote switch connection:** No
- **Power supply system:** Peripheral (individual battery)
- **Battery quality:** NiMH
- **Lamp type:** LED not exchangeable
- **With light source:** Yes
- **Housing material:** Plastic
- **Housing colour:** Grey
- **Material cover:** Without cover
- **Voltage type:** AC
- **Nominal voltage:** 120,00 - 230,00 V
- **Degree of protection (IP):** IP40
- **Protection class:** II
- **Max. system power:** 0,50 W
- **Rated luminous flux according to IEC 62722-2-1:** 22
- **Width:** 67,30 mm
- **Height/depth:** 46,70 mm
- **Built-in width:** 67,30 mm
- **Built-in height/depth:** 36,50 mm
- 00. CE Marking - EU
- 37. Marking - Morocco
- 43. UKCA mark - Great Britain
- 96. Electrotechnical expert ([download](#))
- 99. WEEE Directive ([download](#))



8007352269699
1 NR
11.2x9.6x9.8 [cm]
166.8 [g]

Vimar