



## EIKON: 1P+N C16 RCBO 120-230V 6mA grey

**20411.16.6**

Wiring devices / Traditional wiring devices / EIKON / Devices




### 1P+N C16 RCBO 120-230V 6mA grey

1P+N C 16 residual current breaker with overcurrent protection, supply voltage 120-230 V~ 50-60 Hz,  $I_{\Delta n}$  6 mA, breaking capacity 3000 A, grey - 2 modules


3 - Active

5 NR

[Multilanguage instructions sheet \(688 kb\)](#)



3D

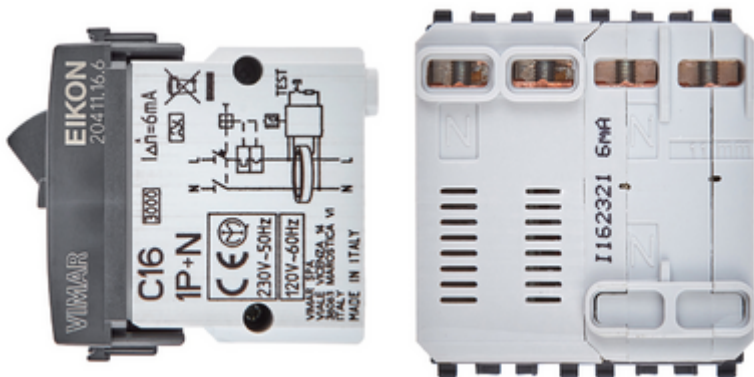

- **Class group:** Circuit breakers and fuses
- **Class:** Earth leakage circuit breaker
- **Number of poles (total):** 2
- **Number of protected poles:** 1
- **Rated voltage:** 230 V
- **Rated current:** 16 A
- **Rated fault current:** 16 A
- **Leakage current type:** A
- **Current limiting class:** 1
- **Rated short-circuit breaking capacity  $I_{cn}$  according to EN 61009-1:** 3.000,00 kA
- **Surge current capacity:** 3,00 kA
- **Voltage type:** AC
- **Frequency:** 50/60 Hz
- **Release characteristic:** C
- **Concurrently switching neutral conductor:** Yes
- **Over voltage category:** 3
- **Built-in depth:** 38,00 mm
- **Flush-mounted installation:** Yes
- **Anti- nuisance tripping version:** No
- **Degree of protection (IP):** IP40

- 00. CE Marking - EU
- 01. IMQ - Italy ([download](#))
- 37. Marking - Morocco
- 96. Electrotechnical expert ([download](#))
- 99. WEEE Directive ([download](#))



8007352282049  
1 NR  
6x5.4x5.3 [cm]  
95.73 [g]



8007352282056  
5 NR  
17.2x13.1x6 [cm]  
537.07 [g]



8007352651197  
70 NR  
37.5x30x21 [cm]  
7,930 [g]