



## EIKON: 2-way switch IoT connected mechanism

---

### 20592.0

Wiring devices / View Wireless wiring devices / EIKON / Devices

#### 2-way switch IoT connected mechanism

View Wireless connected electronic switch mechanism with 100-240 V 50/60 Hz relay output for 500 W incandescent lamps, 100 W LED lamps, 250 VA electronic transformers, 120 W fluorescent lamps, local or remote control, double technology with Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system and Zigbee 3.0 standard, 1 input for external button for actuator control or to recall a scenario, RGB LED visible in darkness with brightness control, 100-240 V 50/60 Hz power supply, to be completed with 1-, 2- or 3-module Eikon interchangeable buttons

- Configuration from View Wireless App for Bluetooth technology system and Amazon App for Zigbee technology
- Compatible with Alexa, Google Home and IFTTT, using the dedicated gateway or Zigbee hub



3 - Active

1 NR



20021 - Button 1M grey



20021.B - Button 1M white



20021.N - Button 1M Next



20022 - Button 2M grey



20022.B - Button 2M white



20022.N - Button 2M Next



20597 - IoT connected gateway 2M grey






20597.B - IoT connected gateway 2M white




20597.N - IoT connected gateway 2M Next

- [Light multilanguage instructions sheet \(1221 kb\)](#)
- [Foglio istruzioni Full \(775 kb\)](#)
- [Feuille d'instructions Full \(777 kb\)](#)
- [Hoja de instrucciones Full \(775 kb\)](#)
- [Full instructions sheet \(772 kb\)](#)
- [Φυλλάδιο οδηγιών Full \(919 kb\)](#)
- [Anweisungsblatt Full \(776 kb\)](#)
- [Anweisungsblatt Full \(843 kb\)](#)
- [Manuale app View Wireless \(15556 kb\)](#)
- [Manuel appli View Wireless \(37703 kb\)](#)
- [Manual app View Wireless \(37528 kb\)](#)
- [Manual View Wireless app \(37579 kb\)](#)
- [Εγχειρίδιο τεχνικού εγκατάστασης \(37781 kb\)](#)
- [Installationsanleitung View Wireless \(37508 kb\)](#)

- Creating-the-system
- Customisations
- Operation-in-Zigbee-mode
- Bluetooth-wifi-gateway



3D

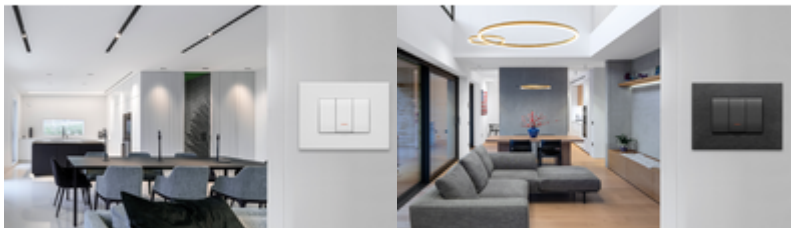

- **Class group:** Domestic switching devices
- **Class:** Installation switch
- **Wiring system:** Two-way switch
- **Method of operation:** Rocker/button
- **Assembly arrangement:** Modular device for domestic switching devices
- **Number of modules (module system):** 1
- **Push button switch:** Yes
- **Number of rockers:** 1
- **Mounting method:** Flush-mounted
- **Type of fastening:** Engage (snap)
- **With mounting plate:** No
- **Material:** Plastic
- **Material quality:** Thermoplastic
- **Halogen free:** Yes
- **Surface protection:** Untreated
- **Surface finishing:** Matt

- **Colour:** Anthracite
- **RAL-number (similar):** 7024
- **Label space/information surface:** Yes
- **Illumination:** Optional
- **Function lighting:** Control and orientation
- **Type of lighting:** LED not exchangeable
- **Suitable for degree of protection (IP):** IP40
- **Nominal voltage:** 250 V
- **Feedback-signal contact:** No
- **Connection type:** Screwed terminal
- **Washing machine switch:** No
- **Device width:** 22,30 mm
- **Device height:** 49,00 mm
- **Device depth:** 47,10 mm
- **Built-in depth:** 37,50 mm

- 00. CE Marking - EU
- 01. IMQ - Italy ([download](#))
- 19. NOM - Mexico
- 29. QCERT - Colombia
- 37. Marking - Morocco
- 37. Marking - Morocco

- 40. Bluetooth technology
- 42. Zigbee certified
- 43. UKCA mark - Great Britain
- 92. RoHS UAE
- 96. Electrotechnical expert ([download](#))
- 99. WEEE Directive ([download](#))



8007352628366  
1 NR  
6x5.4x5.2 [cm]  
52.6 [g]



8007352628373  
60 NR  
37.5x30x13.5 [cm]  
3,516 [g]