



Shared components: SLAVE dimmer 230V 800W/VA

01864

Smart systems&products / By-me Plus / Shared components / DIN devices

SLAVE dimmer 230V 800W/VA

SLAVE dimmer, 230 V~, for: 40-800 W to 50 Hz, 40-700 W to 60 Hz incandescent lamps, 40-800 VA to 50 Hz, 40-700 VA to 60 Hz ferromagnetic transformers, control from 01863, MOSFET+TRIAC technology, protection fuse, for DIN (60715 TH35) rail installation, occupies 4 17,5 mm modules



Product Status

2 - Will be discontinued


Minimum order quantity

1 NR

Sheets, Manuals, Documentation

- [FI - Foglio istruzioni ZIS_49400256A0 \(281 kb\)](#)

Drawings

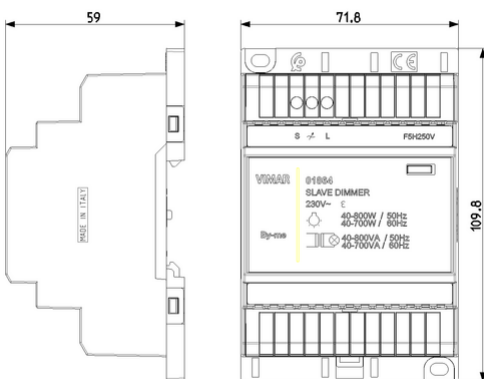

Space view

Certifications

- **00. CE Marking - EU**
- **37. Marking - Morocco**
- **96. Electrotechnical expert ([download](#))**
- **99. WEEE Directive ([download](#))**

Technical data

Class group: Installation bus systems

Class: Dimming actuator for bus system

Bus system KNX: No

Bus system KNX-RF (Radio Frequency): No

Bus system radio frequency: No

Bus system LON: No

Bus system Powernet: No

Other bus systems: Other

Radio frequency bidirectional: No

Model: Dimming actuator

Mounting method: Other

Width in number of modular spacings: 4

With bus connection: No

Bus module detachable: No

Local operation/hand operation: No

With LED indication: Yes

Number of outputs: 1

Output power: 40 - 800 W

Power boost suitable: Yes

Type of load: Universal

Voltage: 230,00 - 230,01 V

Parallel-service possible: No

Frequency: 50,00 - 60,00 HZ

Degree of protection (IP): IP20

Packaging



8007352387454

Qtà 1 NR

Dim 11.7x10.8x7.1
[cm]

Weight 199.6 [g]

Legal

Vimar reserves the right to change at any time and without notice the characteristics of the products reported. Installation should be carried out by qualified staff in compliance with the current regulations regarding the installation of electrical equipment in the country where the products are installed. For the terms of use of the information on the product info sheet see [Conditions of Use](#).