



## Surface mounting components: By-alarm Plus outdoor Bus siren

---

### 03826

Safety / By-alarm Plus / Surface mounting components / Non-modular components

#### **By-alarm Plus outdoor Bus siren**

By-alarm Plus self-powered outdoor siren, connection to the control unit via BUS, 2 piezoelectric speakers, LED alarm signalling, 13.8 VDC power supply, surface mounting. Buffer battery not included. Spirit level for easy installation, system status LED, anti-tamper, anti-removal and anti-foam protection, programmable sounds, programmable timers



#### **Product Status**

3 - Active


#### **Minimum order quantity**

1 NR


## Sheets, Manuals, Documentation

- [Multilanguage instructions sheet \(388 kb\)](#)
- [Feuille d'instructions \(333 kb\)](#)
- [Gebrauchsinformation \(333 kb\)](#)


## Drawings

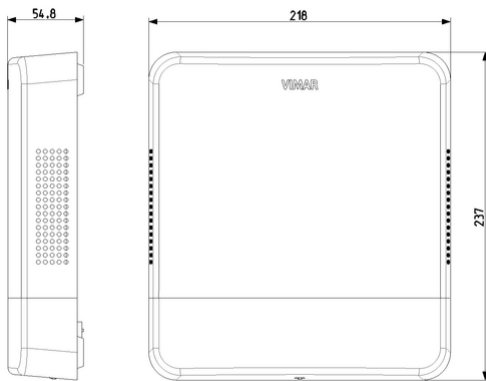

Space view

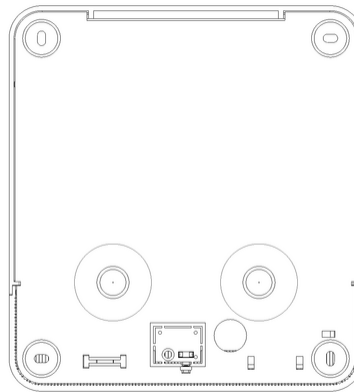

Backside view

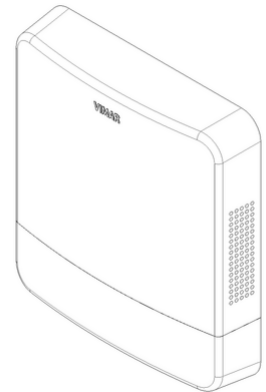

3D View

## Certifications

- 00. CE Marking - EU
- 21. IMQ-SICUREZZA - Italy ([download](#))
- 37. Marking - Morocco
- 46. UK PSTI compliance ([download](#))
- 99. WEEE Directive ([download](#))

## Technical data

**Class group:** Optical and acoustic signalling equipment

**Class:** Signalling bell

**Housing colour:** White

**Housing material:** Other

**Type of tone:** Other

**Loudness:** 108 dB

**Nominal voltage:** 13,80 V

**Current supply:** Mains power supply

**Built-in transformer:** No

**Type of current:** DC

**Electricity consumption:** 0,15 A

**Mounting method:** Surface mounted

**With radio control:** No

**Degree of protection (IP):** IP34

**Degree of protection (NEMA):** Other

## Packaging



8 007352 708181

8007352708181

**Qtà** 1 NR  
**Dim** 25.2x23.3x8.7  
[cm]

**Weight** 800.2 [g]



8 007352 708211

8007352708211

**Qtà** 4 NR  
**Dim** 34.5x28.5x24.5  
[cm]

**Weight** 3,592 [g]

## You may also be interested in



03830 - By-alarm Plus  
outdoor RF siren



03827 - By-alarm Plus  
outdoor siren

## Legal

Vimar reserves the right to change at any time and without notice the characteristics of the products reported. Installation should be carried out by qualified staff in compliance with the current regulations regarding the installation of electrical equipment in the country where the products are installed. For the terms of use of the information on the product info sheet see [Conditions of Use](#).