



NEVE UP: 1P NO 10A push button 2M white

09008.2

Wiring devices / Traditional wiring devices / NEVE UP / Devices

1P NO 10A push button 2M white

1P NO 10 A 250 V~ push button, white - 2 modules

Product Status


3 - Active

Minimum order quantity



20 NR




Drawings

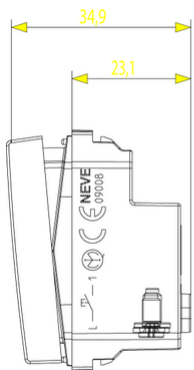

Space view

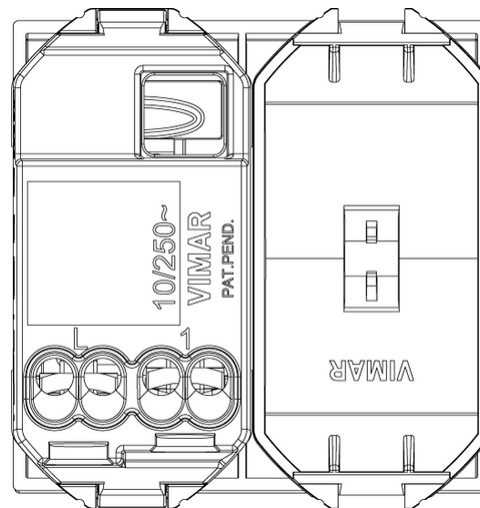

Backside view

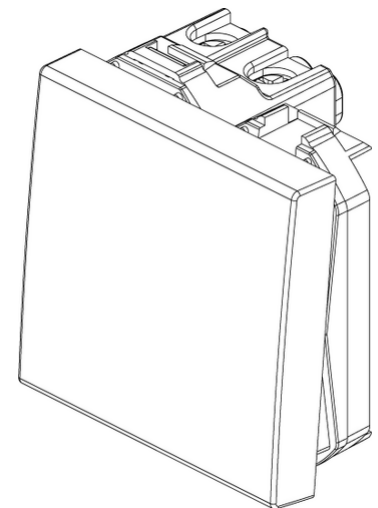

3D View

Certifications

- 00. CE Marking - EU
- 15. CCC - China ([download](#))
- 19. NOM - Mexico
- 37. Marking - Morocco
- 37. Marking - Morocco
- 96. Electrotechnical expert ([download](#))
- 99. WEEE Directive ([download](#))

Technical data

Class group: Domestic switching devices

Class: Push button

Assembly arrangement: Modular device for domestic switching devices

Model: Single push button

Operating method: Push button

Number of rockers: 1

Number of modules (module system): 200

Number of poles: 1

Nominal voltage: 250 V

Rated current: 10,00 A

With lighting: Yes

Monitoring contact: No

Mounting method: Built-in

Type of fastening: Engage (snap)

Material: Plastic

Material quality: Thermoplastic

Halogen free: Yes

Surface protection: Untreated

Surface finishing: Glossy

Colour: White

RAL-number (similar): 9003

Transparent: No

Label space/information surface: Yes

Suitable for degree of protection (IP): IP40

Device width: 44,80 mm

Device height: 47,00 mm

Device depth: 34,90 mm

Packaging



8 007352 296763

8007352296763

Qtà 1 NR

Dim 5.1x4.3x5.3 [cm]

Weight 29.13 [g]



8 007352 296770

8007352296770

Qtà 20 NR

Dim 26.9x11.6x9 [cm]

Weight 698 [g]



8 007352 296787

8007352296787

Qtà 240 NR

Dim 38.5x28.5x38 [cm]

Weight 8,960 [g]

You may also be interested in



09001.2 - 1P 16AX 1-way
switch 2M white



09005.2 - 1P 16AX 2-way
switch 2M white



09008 - 1P NO 10A push
button white



09013.2 - 1P 16AX
reversing switch 2M
white



09050 - 1P NO 10A name-
plate push button white

Legal

Vimar reserves the right to change at any time and without notice the characteristics of the products reported. Installation should be carried out by qualified staff in compliance with the current regulations regarding the installation of electrical equipment in the country where the products are installed. For the terms of use of the information on the product info sheet see [Conditions of Use](#).