



NEVE UP: Button 1M +diffuser PLS symb.white

09026.PLS

Wiring devices / Traditional wiring devices / NEVE UP / Buttons

Button 1M +diffuser PLS symb.white


1-module interchangeable button, lightTable Please Clean symbol with speaker, white

Product Status

3 - Active

Minimum order quantity

50 NR

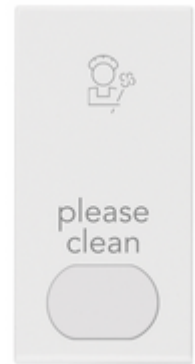

You may also be interested in



09026.DND - Button 1M +diffuser DND symb.white



09097 - Pushbutton +2 Hotel09470 - indicators 230V



09470 - Dial thermostat 100- 240V 2M white




09290 - Shaver supply unit 230V white



09463 - Vertical badge switch 2M white



09465 - Vertical pocket badge switch white



09257 - 2P+E13ASICURY multistandard outlet white




09052 - 1P NO 10A cord-operated push white




09181 - IR relay-switch 230V white

Drawings



Space view



Backside view



3D View


Technical data

- **Class group:** Domestic switching devices
- **Class:** Control element/cover plate for domestic switching devices
- **Model:** One-part rocker
- **Utilization:** Switch/push button
- **Suitable for touch sensor connector for bus system:** No
- **Type of fastening:** Clamp mounting
- **Monitoring window/light outlet:** Yes
- **Material:** Plastic
- **Material quality:** Thermoplastic
- **Surface protection:** Untreated
- **Surface finishing:** Glossy
- **Colour:** White
- **RAL-number (similar):** 9003
- **With exchangeable lens/symbol:** Yes
- **Depth:** 750,00 mm


Certifications

- 00. CE Marking - EU
- 29. QCERT - Colombia ([download](#))
- 29. QCERT - Colombia
- 43. UKCA mark - Great Britain

Packaging



Code 8007352663558
Quantity 1 NR
Dim. 2.2x4.4x1.1 [cm]
Weight 6.358 [g]



Code 8007352663565
Quantity 5 NR
Dim. 5.1x2.8x5.3 [cm]
Weight 24.25 [g]



Code 8007352663572
Quantity 50 NR
Dim. 14.4x11.6x6 [cm]
Weight 282.92 [g]



Code 8007352668744
Quantity 600 NR
Dim. 36.5x33x13.5 [cm]
Weight 3,815.04 [g]

Legal

Vimar reserves the right to change at any time and without notice the characteristics of the products reported. Installation should be carried out by qualified staff in compliance with the current regulations regarding the installation of electrical equipment in the country where the products are installed. For the terms of use of the information on the product info sheet see [Conditions of Use](#).