



IDEA: IR-receiver + dimmer 230V white

16625.B

Wiring devices / Traditional wiring devices / IDEA / Devices

IR-receiver + dimmer 230V white

Infrared receiver with dimmer, supply voltage 230 V~ 50 Hz for: 40-450 W incandescent lamps, 40-450 VA ferromagnetic transformers and 40-300 VA inductive response electronic transformers, control and regulation with built-in push button, from 01849 remote control or from NO peripheral push buttons, MASTER function, MOSFET+TRIAC technology, visible in darkness, white



Product Status

2 - Will be discontinued


Minimum order quantity

5 NR


Sheets, Manuals, Documentation

- [Multilanguage instructions sheet \(493 kb\)](#)


Drawings

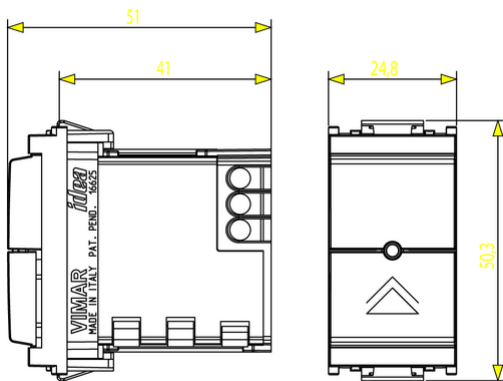

Space view

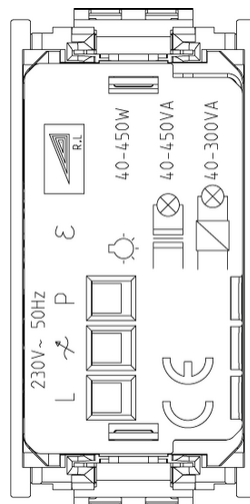

Backside view

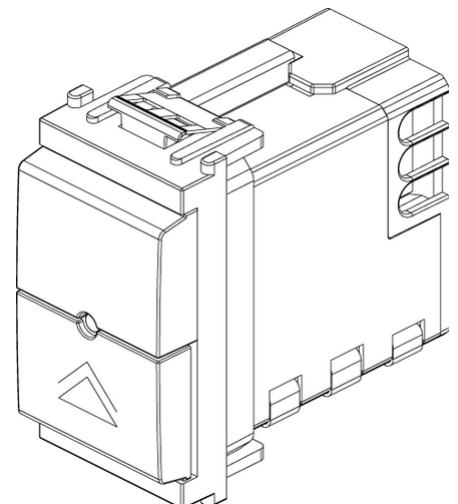

3D View

Certifications

- 00. CE Marking - EU
- 37. Marking - Morocco
- 96. Electrotechnical expert ([download](#))
- 99. WEEE Directive ([download](#))

Technical data

Class group: Domestic switching devices

Class: Dimmer

Operating method: Infrared

Type of load: Inductive load

Applicable with button: Yes

Applicable with movement sensor: No

Applicable with presence indicator: No

Applicable with time switch/timer: No

Applicable with transmission button: No

Applicable with infrared button: Yes

Mounting method: Flush-mounted

Type of fastening: Click in mounting

Material: Plastic

Material quality: Thermoplastic

Surface protection: Untreated

Surface finishing: Matt

Colour: White

RAL-number (similar): 9001

Transparent: No

Suitable for degree of protection (IP): IP40

Nominal voltage: 230,00 - 230,01 V

Frequency: 50,00 - 50,01 HZ

Control voltage: 230,00 - 230,01 V

Device width: 24,80 mm

Device height: 50,10 mm

Device depth: 51,60 mm

Packaging



8 007352 301504

8007352301504

Qtà 1 NR

Dim 5.1x4.3x5.3 [cm]

Weight 54.53 [g]



8 007352 301511

8007352301511

Qtà 5 NR

Dim 14.4x11.6x6 [cm]

Weight 325.53 [g]

Legal

Vimar reserves the right to change at any time and without notice the characteristics of the products reported. Installation should be carried out by qualified staff in compliance with the current regulations regarding the installation of electrical equipment in the country where the products are installed. For the terms of use of the information on the product info sheet see [Conditions of Use](#).