



## ARKÉ: IR relay-switch 120V grey

**19181.120**

Wiring devices / Traditional wiring devices / ARKÉ / Devices

### IR relay-switch 120V grey

Automatic lighting switch with IR motion sensor, adjustable dusk/dawn sensor threshold and time-delay cycle, NO 6 A 120 V~ relay output, supply voltage 120 V~ 50-60 Hz, grey

### Product Status

3 - Active

### Minimum order quantity

5 NR


### Sheets, Manuals, Documentation

- [Light Multilanguage instructions sheet \(834 kb\)](#)
- [Full Multilanguage instructions sheet \(859 kb\)](#)


### Video

- [Arké lives in your time](#)


### Drawings

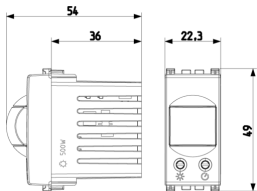


Space view

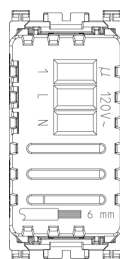

Backside view



3D View

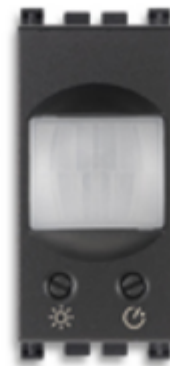

## Technical data

- **Class group:** Domestic switching devices
- **Class:** Electronic insert for domestic switching devices
- **Model:** Other
- **Assembly arrangement:** Modular device for domestic switching devices
- **Number of modules (module system):** 1
- **Radio-controlled:** No
- **Mounting method:** Flush-mounted
- **Type of fastening:** Engage (snap)
- **Material:** Plastic
- **Material quality:** Thermoplastic
- **Surface protection:** Untreated
- **Surface finishing:** Matt
- **Colour:** Grey
- **RAL-number (similar):** 7015
- **Transparent:** No

## Certifications

- 00. CE Marking - EU
- 19. NOM - Mexico
- 37. Marking - Morocco
- 99. WEEE Directive ([download](#))

## Packaging



**Code** 8007352471122  
**Quantity** 1 NR  
**Dim.** 5.1x4.3x5.3 [cm]  
**Weight** 51.1 [g]

**Code** 8007352471139  
**Quantity** 5 NR  
**Dim.** 14.4x11.6x6 [cm]  
**Weight** 302.5 [g]

## Legal

Vimar reserves the right to change at any time and without notice the characteristics of the products reported. Installation should be carried out by qualified staff in compliance with the current regulations regarding the installation of electrical equipment in the country where the products are installed. For the terms of use of the information on the product info sheet see [Conditions of Use](#).