ARKÉ: 2x2P+E 13A English sockets+pilot grey

19222.L

Wiring devices / Traditional wiring devices / ARKÉ / Devices

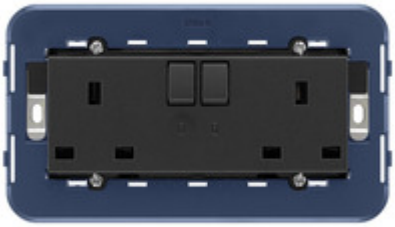

2x2P+E 13A English sockets+pilot grey

Two 2P switched 2P+E 13 A 250 V~ SICURY socket outlets, English standard with indicator unit, with built-in frame for British standard mounting boxes, to complete with 5-module British standard cover plate, grey

Product Status

3 - Active

Minimum order quantity

5 NR

Sheets, Manuals, Documentation

- Multilanguage instructions sheet (894 kb)

Drawings

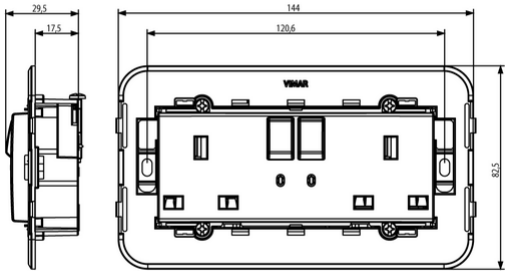

Space view

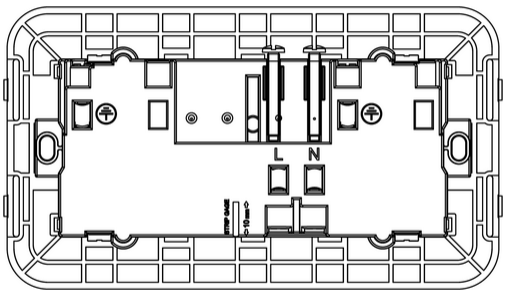

Backside view

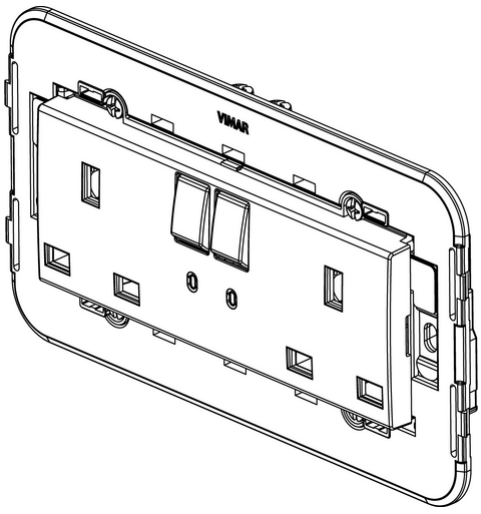

3D View

Certifications

- **00. CE Marking - EU**
- **08. ASTA - UK (download)**
- **26. SASO - Saudi Arabia (download)**
- **30. G-Mark - Gulf Countries (download)**
- **37. Marking - Morocco**
- **96. Electrotechnical expert (download)**
- **99. WEEE Directive (download)**

Technical data

Class group: Domestic switching devices

Class: Socket outlet

Model: British Standard

Number of modules (module system): 5

Number of socket outlets switchable: 2

Imprint/indication: None

Connection type: Screwed terminal

With hinged lid: No

With enhanced contact protection: Yes

Label space/information surface: Yes

Colour: Grey

RAL-number (similar): 7015

Metallic colour: No

Transparent: No

Lockable: No

Eject-mechanism: No

Insulated mounting: No

With function lighting: Yes

With orientation lighting: No

Overvoltage protection: No

Fault current protection: No

Mounting method: Flush-mounted

Material: Plastic

Material quality: Thermoplastic

Surface protection: Untreated

Surface finishing: Matt

With loop through function: No

With on/off switch: Yes

Rotated central insert: No

Nominal current: 13 A

Nominal voltage: 250 V

Frequency: 50,00 - 60,00 HZ

Suitable for degree of protection (IP): IP20

Impact strength: Other

Device width: 144,00 mm

Device height: 82,50 mm

Device depth: 29,50 mm

Packaging

8007352592742

Qtà	1 NR
Dim	8.5x3.5x15 [cm]
Weight	163.5 [g]

8007352592759

Qtà	5 NR
Dim	17.5x16.3x9.8 [cm]
Weight	898.7 [g]

Legal

Vimar reserves the right to change at any time and without notice the characteristics of the products reported.Installation should be carried out by qualified staff in compliance with the current regulations regarding the installation of electrical equipment in the country where the products are installed.For the terms of use of the information on the product info sheet see Conditions of Use.