



EIKON: 2P 10AX 2-way switch Next

20060.N

Wiring devices / Traditional wiring devices / EIKON / Devices

2P 10AX 2-way switch Next


2P 10 AX 250 V~ (6 terminals) two-button switch, with directional arrows and central OFF position, Next. Max 100 W for self-ballasted lamps (IEC 60669-1:2017)

Product Status


3 - Active

Minimum order quantity


10 NR

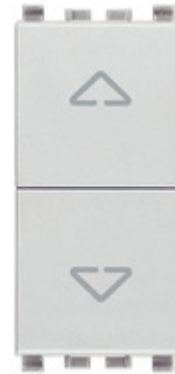


Drawings

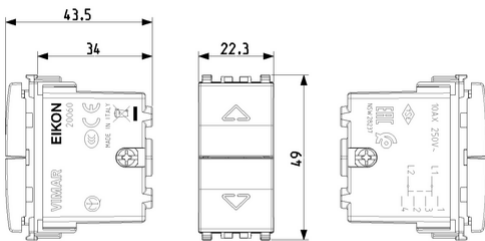

Space view

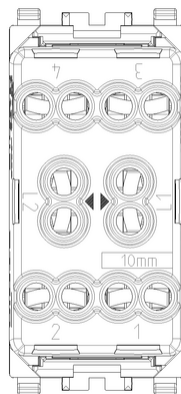

Backside view

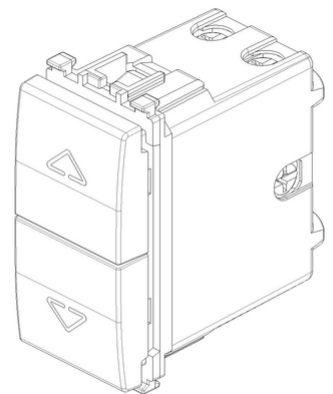

3D View

Certifications

- 00. CE Marking - EU
- 01. IMQ - Italy ([download](#))
- 14. TSE - Turkey
- 15. CCC - China ([download](#))
- 20. IQC - Argentina
- 31. TISI - Thailand
- 35. RCM - Australia
- 37. Marking - Morocco
- 96. Electrotechnical expert ([download](#))
- 99. WEEE Directive ([download](#))

Technical data

Class group: Domestic switching devices

Class: Push button

Assembly arrangement: Modular device for domestic switching devices

Model: Other

Operating method: Other

Number of rockers: 1

Number of modules (module system): 100

Number of poles: 2

Nominal voltage: 250 V

Rated current: 10,00 A

With lighting: No

Monitoring contact: No

Mounting method: Built-in

Type of fastening: Engage (snap)

Material: Plastic

Material quality: Thermoplastic

Halogen free: Yes

Surface protection: Lacquered

Surface finishing: Matt

Colour: Silver

RAL-number (similar): 9022

Transparent: No

Label space/information surface: Yes

Suitable for degree of protection (IP): IP40

Device width: 22,30 mm

Device height: 49,00 mm

Device depth: 43,50 mm

Packaging



8 007352 291454

8007352291454

Qtà 1 NR
Dim 5.1x2.8x5.3 [cm]
Weight 43.47 [g]



8 007352 291461

8007352291461

Qtà 10 NR
Dim 14.4x11.6x6 [cm]
Weight 480.33 [g]



8 007352 637825

8007352637825

Qtà 120 NR
Dim 36.5x33x13.5 [cm]
Weight 6,183 [g]

You may also be interested in



20196.N - Quid -Rolling
shutters 2-way switch
Next

Legal

Vimar reserves the right to change at any time and without notice the characteristics of the products reported. Installation should be carried out by qualified staff in compliance with the current regulations regarding the installation of electrical equipment in the country where the products are installed. For the terms of use of the information on the product info sheet see [Conditions of Use](#).