



## EIKON: 12V 50-60Hz buzzer Next

### 20375.N

Wiring devices / Traditional wiring devices / EIKON / Devices

### 12V 50-60Hz buzzer Next


Buzzer, 12 V~ (SELV) 50-60 Hz, Next

### Product Status


2 - Will be discontinued

### Minimum order quantity

10 NR

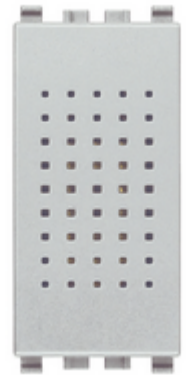

## Drawings



Space view

## Technical data

- **Class group:** Optical and acoustic signalling equipment
- **Class:** Buzzer
- **Nominal voltage:** 12 V
- **Type of current:** AC
- **Electricity consumption:** 0,67 A
- **Degree of protection (IP):** IP40
- **Loudness:** 75 dB
- **Housing material:** Plastic
- **Housing colour:** Grey
- **Mounting method:** Other
- **Built-in transformer:** No

## Certifications

- 00. CE Marking - EU
- 10. EAC Eurasian Customs Union
- 43. UKCA mark - Great Britain
- 99. WEEE Directive ([download](#))

## Packaging



8 007352 287389

**Code** 8007352287389  
**Quantity** 1 NR  
**Dim.** 5.1x2.8x5.3 [cm]  
**Weight** 47.8 [g]



8 007352 287396

**Code** 8007352287396  
**Quantity** 10 NR  
**Dim.** 14.4x11.6x6 [cm]  
**Weight** 519.27 [g]



8 007352 657137

**Code** 8007352657137  
**Quantity** 120 NR  
**Dim.** 36.5x33x13.5 [cm]  
**Weight** 6,648 [g]

## Legal

Vimar reserves the right to change at any time and without notice the characteristics of the products reported. Installation should be carried out by qualified staff in compliance with the current regulations regarding the installation of electrical equipment in the country where the products are installed. For the terms of use of the information on the product info sheet see [Conditions of Use](#).