



EIKON: LED-emergency lamp 3M 120-230V grey


20384

Wiring devices / Traditional wiring devices / EIKON / Devices

LED-emergency lamp 3M 120-230V grey

Lamp with high-efficiency LED, supply voltage 120-230 V~ 50-60 Hz, automatic emergency device, 3 rechargeable AAA 1,2 V batteries, 1 hour of operating time, grey - 3 modules

- The battery is charged continuously when powered
- Battery charging time of 15 h, operating time after charging approximately 1 h
- Supply voltage: 120-230 V~ $\pm 10\%$, 50-60 Hz. Luminous flux: 22 lumen. Absorption: 0.5 W
- The lamp with LED provides auxiliary lighting in the event of a power failure; when the power returns, the lamp automatically switches off and the green LED is lit

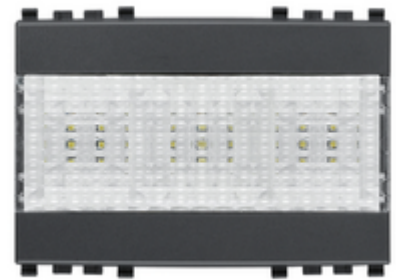

Product Status

3 - Active


Minimum order quantity

1 NR


Sheets, Manuals, Documentation

- [Multilanguage instructions sheet \(992 kb\)](#)


Drawings



Space view



Backside view



3D View

Gallery



Technical data

- **Class group:** Luminaires
- **Class:** Emergency luminaire
- **Mounting method:** Built-in
- **Monitoring equipment:** None
- **With remote switch connection:** No
- **Power supply system:** Peripheral (individual battery)
- **Battery quality:** NiMH
- **Lamp type:** LED not exchangeable
- **With light source:** Yes
- **Housing material:** Plastic
- **Housing colour:** Grey
- **Material cover:** Without cover
- **Voltage type:** AC
- **Nominal voltage:** 120,00 - 230,00 V
- **Degree of protection (IP):** IP40
- **Protection class:** II
- **Max. system power:** 0,50 W
- **Rated luminous flux according to IEC 62722-2-1:** 22
- **Width:** 67,30 mm
- **Height/depth:** 46,70 mm
- **Built-in width:** 67,30 mm
- **Built-in height/depth:** 36,50 mm

Certifications

- 00. CE Marking - EU
- 37. Marking - Morocco
- 43. UKCA mark - Great Britain
- 96. Electrotechnical expert ([download](#))
- 99. WEEE Directive ([download](#))

Packaging



Code 8007352269699
Quantity 1 NR
Dim. 11.2x9.6x9.8 [cm]
Weight 166.8 [g]

Legal

Vimar reserves the right to change at any time and without notice the characteristics of the products reported. Installation should be carried out by qualified staff in compliance with the current regulations regarding the installation of electrical equipment in the country where the products are installed. For the terms of use of the information on the product info sheet see [Conditions of Use](#).