

Instruction Manual

Vimar By-web KNX Software for Apple mobile devices
User Manual

Vimar End-User License Contract

Vimar end-user license contract

VIMAR SPA located in Marostica (VI), Viale Vicenza n. 14 (<http://www.vimar.com>), sole owner of the software named "Vimar By-web KNX", through this contract grants the license of use of the aforementioned program.

VIMAR SPA shall not be held liable for any damage caused by improper use of the aforementioned software, in particular for direct or indirect damage to persons, property, and/or animals due to economic loss that may occur as a result of the use of the software.

VIMAR SPA reserves the right to make any changes to improve the function of the aforementioned software without advance notice. It is prohibited to modify, translate, adapt, or create applications based on the aforementioned software, without previous written consent from VIMAR.

The user must verify the suitability of the program to his needs, and interpret the results to verify the consequences of the choices of design made.

All risks concerning the results and performance of the program are assumed by the user.

VIMAR SPA holds the exclusive property right of the software.

Unauthorized duplication of the program is prohibited.

It is expressly forbidden to modify, translate, fit, change, disassembly in any way or to create by-products from the software.

The user is to be held responsible not to eliminate any information of the software relevant to the Copyright.

The software are protected under the Copyright laws in force in Italy and foreseen by the International treaties, therefore, any activity realized in contrast with what is stated above, will be prosecuted at the right place.

This program is not for sale and is distributed free of charge.

Microsoft, Windows, Vista, Xp, Seven, Media Center, Internet Explorer are registered trademarks of the Microsoft Corporation in the United States and/or other countries.

Apple, Mac, Mac OS, iMac, MacBook, iPhone, iPod Touch, iPad, Safari are trademarks of Apple Inc., registered in the U.S. and other countries.

Mozilla, Firefox are registered trademarks of Mozilla.

Google Chrome is a trademark of Google Inc.

Linux is a registered trademark of Linus Torvalds in the United States and/or other countries.

VIMAR SPA
Viale Vicenza, 14
36063 Marostica VI - Italy
<http://www.vimar.com>

1. INTRODUCTION	2
1.1 Vimar By-web KNX for Apple iOS	2
1.2 What is Vimar By-web KNX.	2
1.3 Installation and requirements.	2
1.5 Language	3
2. CONFIGURATION	4
2.1 Introduction	4
2.2 Creating a new project	4
2.2.1 Creating a new project with automatic Web Server KNX Search function	6
2.2.2 Creating a new project with Web Server KNX manual selection	7
2.3 Changing an existing project	8
2.4 Deleting a project	9
2.5 Setting a project as default	9
2.5.1 Accessing the Web Server KNX via the By-web KNX app	9
2.5.2 Connection Error	9
2.5.3 Cleaning the cache.	10
3. USE	11
3.1 Introduction	11
3.2 Displaying the side bar menu	12
3.3 Return to the side bar main menu	13
3.4 Web Server KNX functions	13
3.5 Viewing RTSP video streams	13

Introduction

1. INTRODUCTION

1.1 Vimar By-web KNX for Apple iOS

Vimar By-web KNX for iOS is an application for mobile devices with the Apple iOS operating system that permits access to the Web Server By-web KNX (part 01545) of Vimar.

1.2 What is Vimar By-web KNX

Vimar By-web KNX (part 01545) is a Web Server that allows you to manage your KNX home automation system through a PC, notebook, tablet or touch screen, as well as mobile devices with browsers able to display web pages.

For Apple iPhone and iPod Touch devices, there is a dedicated application (Vimar By-web KNX for iOS) available for download from the App Store, which allows remote access to the By-web KNX control system. For Google Android mobile devices, there is a dedicated application (Vimar By-web for Android) available for download from Google Play, which allows remote access to the By-web KNX control system. This manual explains how to configure and use this application (By-web KNX for iOS devices).

1.3 Installation and requirements

To install the application visit the App Store, search for the application, and follow the on screen instructions to complete the installation. Once the application has been installed, an icon to run the program will appear on your device.



In order to install the application, the mobile device must have version 5.1 or higher of the iOS operating system installed.

Other requirements include:

- a KNX home automation system provided with the Web Server By-web KNX by Vimar
- a Wi-Fi connection for the first configuration and for use in the local area network (the first configuration can also be done remotely)
- an internet connection, configured according to the instructions in the Vimar By-web KNX Installation Manual, to control the system remotely

Attention: check that the firmware version declared by the mobile phone manufacturer meets the requirements for use with the Vimar By-web KNX software.

1.5 Language

The By-web KNX software can be configured in different languages.

The By-Web KNX software automatically identifies the language set for the iOS operating system and consequently activates the same language.

The language set in the By-web KNX for iOS application is used in the setup screens of the application itself, while the content of the Web Server By-web KNX pages are presented in the language set in the accessed Web Server By-web KNX (see the Web Server By-web KNX documentation for the language setting in the Web Server By-web KNX and the list of available languages).

NOTE: If the language set for the iOS operating system is not available for the By-Web KNX application, English will be set. To set the language for the iOS operating system, refer to the manual of the Apple device itself.

Configuration

2. CONFIGURATION

2.1 Introduction

The application allows you to manage multiple projects on the one mobile device, thus allowing connection with more than one Web Server KNX (home, work, beach home, etc...).

The application manages each system as a separate "project".



2.2 Creating a new project

To create a new project within the application, you must first perform the following operations:





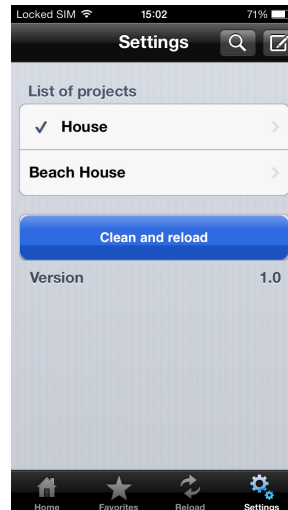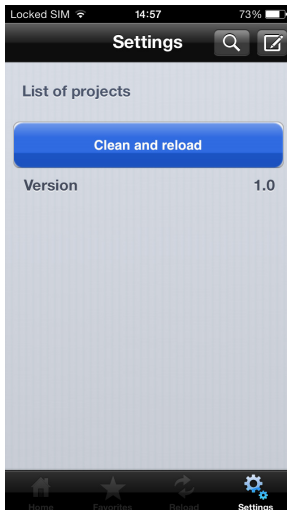


1. Set up every aspect of the home automation system supervision in the Web Server Vimar By-web KNX.
2. Connect your Web Server KNX Vimar to the Wi-Fi network that is connected to the iPhone on which the application is installed.
3. Install and run the application on your iPhone.
4. When the By-web KNX is enabled, select the "Settings" icon available in the toolbar at the bottom right, to view all the projects created with the application. Initially, the project list is empty. Two images are shown below: the first with the empty project list and the second with two configured projects.
5. Proceed with the creation of the new project.

During this procedure, the data relating to the connection to the Web Server KNX, as well as the description to be assigned to the project, are set in the app.

The app provides two ways to create a new project, which will be described in later chapters. The two modes differ only by the way the IP address is set up on the Web Server KNX: the first carries out a scan of the LAN looking for a Web Server KNX, while the second requires to enter the Web Server KNX IP address manually.



The buttons of the settings page.


Icon	Operation	Description	Position
	Add project with the automatic Web Server KNX Search	Searches the LAN network for active Web Servers to create a new project.	Top toolbar
	Add project with the manual Web Server KNX Search	Opens the page for creating a new project with the Web Server KNX manual configuration.	Top toolbar
	Clean and reload	It deletes the data in the caches and reloads the data of the current project.	Workspace
	Home	It goes back to the home page of the application corresponding to the current project.	Bottom toolbar
	Favorites	Shortcut to display the Favorites page of the Web Server KNX.	Bottom toolbar
	Reload	It reloads the data of the current project.	Bottom toolbar
	Settings	It opens the project list page.	Bottom toolbar

Configuration

2.2.1 Creating a new project with automatic Web Server KNX Search function

After selecting "Add project with the automatic Web Server KNX Search", the application scans the network and displays the Web Server KNX and corresponding IP addresses available on the LAN for import. Select the Web Server KNX with the desired project.

After selecting the desired Web Server KNX address, a window appears for the Web Server KNX access configuration settings, where the local IP address field is already filled.

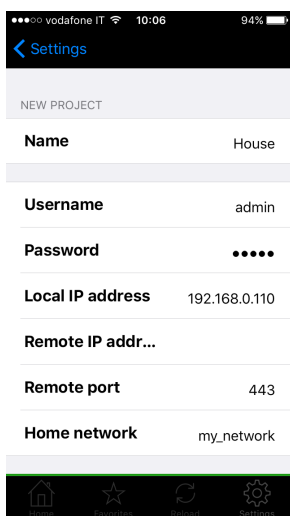

Meaning of the Web Server KNX app access parameters:

Field	Description
Name	Name of the project identifies the project in the list of projects managed by the app.
Username	Web Server KNX username required to access the Web Server KNX via the app. For the Web Server KNX user management, please refer to the Web Server KNX documentation.
Password	Web Server KNX password required to access the Web Server KNX via the app. For the Web Server KNX user management, please refer to the Web Server KNX documentation.
Local IP address	IP address of the Web Server KNX in the LAN, for local access.
Remote IP address	IP address or DNS domain used for Web Server KNX remote access.
Remote port	Port number used for the Web Server KNX remote access.

Home network	<p>SSID (the name with which is identified a wireless local area network (WLAN) of the WLAN connected to the LAN in which the Web Server is connected. This data is required for the "local" connection to the Web Server. Pressing in this field displays a window to set the parameter.</p> <p>If your mobile device is connected to a WLAN, a list of the latest WLAN appears that the mobile device has accessed: if among these the desired WLAN is visible, select it. In the event that no list appears (for example, because the mobile device is not connected to any WLAN at that time), it is possible to manually enter the SSID of your home network.</p> <p>Compilation of this field is mandatory in order to complete the configuration procedure of connection of the app to the Web Server.</p> <p>Important: if you do not have this information you will not be able to access the "local" Web Server but you can still access the "remote" Web Server by associating a "dummy" name to that parameter.</p>
--------------	--

After entering the project parameters, click the "OK" button (located at the bottom of the page) to save the data and "Favorites" the project (so the project is displayed when you open the app).
After saving the data, the window with the project list appears.

Note: Some network configurations inhibit the correct function of the By-web KNX app's automatic Web Server KNX detection procedure.
If this occurs, perform the procedure manually by setting the parameters of the Web Server KNX as described below.

If app cannot communicate with the selected Web Server KNX, you will see an error message (see the chapter on access to the Web Server KNX and connection error).

2.2.2 Creating a new project with Web Server KNX manual selection

By pressing the "Add project with the manual Web Server Search" button, the Web Server KNX manual selection page appears for the project to be imported. In this case, it is also necessary to enter the local IP address of the Web Server KNX.

Then proceed as described in the previous chapter, and finally save the configuration data by pressing the "OK" button. After saving, the window with the list of projects appears.

If app cannot communicate with the selected Web Server KNX, you will see an error message (see chapter Selecting a project and connection error).

Configuration

2.3 Changing an existing project

To change the parameters of an existing project:

1. When the By-web KNX app is enabled, select "Settings" from the bottom toolbar. A list of all the projects created with the application will appear.
2. Select the row corresponding to the project you intend to modify. The page with the project connection details appears.
3. Press the "Edit" button (on the right in the top toolbar) and apply the changes.
4. When done, press the "Save" button (on the right in the upper toolbar) to save the changes, or press the "Cancel" button (in the upper left side of the toolbar) to return to the project page without saving.

Note: you cannot change the name of a previously created project.

If app cannot communicate with the selected Web Server KNX, you will see an error message (see the chapter on access to the Web Server KNX and connection error).

2.4 Deleting a project

To delete an existing project:

1. Select "Settings" from the bottom toolbar. A list of all the projects created with the application will appear.
2. Select the row corresponding to the project to be deleted. The page with the project connection details appears.
3. Press the "Edit" button (on the right in the top toolbar).
4. Press "Delete project" at the bottom of the configuration page to remove the project (after confirming), or press "Cancel" (on the left in the upper toolbar) to go back to the project page without deleting the project.

2.5 Setting a project as default

If there is more than one project saved in the app and you want to use a different project to the one currently in use, follow the procedure below:

1. Select "Settings" from the bottom toolbar. A list of all the projects created with the application will appear.
2. Select the row corresponding to the project to be deleted. The page with the project connection details appears.
3. Press the "Select Project" button located at the top of the page with the project details.

The project "Favorites" page appears and the selection is highlighted in the project list and the active project can be used from this moment and whenever the app is subsequently run.

2.5.1 Accessing the Web Server KNX via the By-web KNX app

After selecting the desired project, if the conditions for connection to the Web Server KNX are satisfied, the app connects to the Web Server KNX.

The app includes a procedure for loading some of the project data to a local database for faster subsequent access to the Web Server KNX, especially for Web Server KNX access via remote connection. This process can take a few minutes and is carried out each time the active project is changed. During this process, none of the Web Server KNX functions are available via the app.

The data loading procedure steps are highlighted by different messages on a black screen (some steps also display the percentage of completion of the operation).

Data loading progress while the app is open is shown by an icon in the top toolbar.

2.5.2 Connection Error

If the app cannot connect to the Web Server KNX identified by the configuration parameters, an error message is displayed.

Configuration

This error may be caused by the following reasons:

1. The connection parameters (IP address and port) of the Web Server KNX have not been entered correctly in the app project configuration page.

Solution: check the data entered in the project configuration page of the app.

2. The connection parameters for the Web Server KNX have been entered correctly, but there are network problems.

Solution: Verify the correct operation of the LAN.

If such an error occurs, you can:


1. Go back to the project list by pressing the "Settings" button on the bottom toolbar.
2. Carry out the necessary checks and apply the required changes to the Web Server KNX connection data and/or troubleshoot your mobile device connection.
3. Try to connect again

2.5.3 Cleaning the cache

The "Clear cache" function clears the data in the cache memory assigned to the app.

This procedure may be necessary after updating the Web Server KNX.

To clear the cache of the app, when the By-web KNX app is enabled, select the "Clean and reload" button on the bottom of the page with the project list (accessible by pressing the "Settings" button from the bottom toolbar).

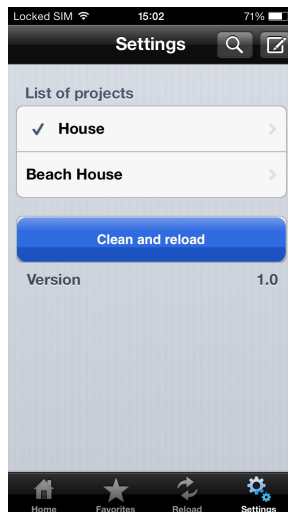

Note: upon clearing the cache, the system project data is automatically reloaded.
This procedure may take a few minutes.

3. USE

3.1 Introduction

The By-web KNX app allows you to navigate the supervision areas of the Vimar Web Server KNX (part 01545) from Apple mobile devices, with better performance and greater convenience than through a standard browser.

Before accessing a Vimar Web Server KNX from the app, you must configure the project, as described in the Configuration section of this manual.

The app does not allow automatic screen rotation of the Apple mobile device according to its orientation.

The view is automatically fixed in portrait or landscape mode depending on the screen and device characteristics.

In case of vertical view and relatively small screen of the mobile device, the device will display the automation system pages in "grid" format, regardless of the Web Server KNX settings (refer to the Web Server KNX documentation for a description of the "grid" view or "map" view in the Web Server KNX).

On the supervision pages, the home automation devices in the system are represented by widgets (refer to the Vimar Web Server KNX documentation).

Depending on the type of device/function, the widgets may be as simple as the light ON/OFF controls or the scenarios, or they may also open a popup window containing the necessary data for detailed manipulation, in which case the pop-up may not be fully visible due to the size of the screen of the mobile device and scrolling will be necessary to view the hidden parts.




Navigating the pages of the Web Server KNX via the app is similar to accessing the Web Server KNX via PC browsers. You can therefore refer to your Web Server KNX manual for a description of the Web Server KNX interface.


Use

3.2 Displaying the side bar menu

Navigation between different sections of the Web Server KNX is handled via the side menu.

To display the side menu, press the icon on the top horizontal menu bar  or use the "drag from left to right" gesture.

To close the menu, press the button again or use the "drag from right to left" gesture.

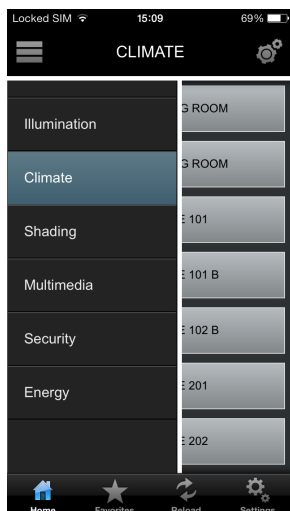


When the main menu appears, select the desired item.

The management of the menu is the same when accessing the Web Server KNX from the PC (refer to the Web Server KNX manual for more information).

If the number of menu items exceeds what can be displayed at one time on the screen, you can access the menu items that are not visible by scrolling.

3.3 Return to the side bar main menu

To return to the main menu, select the "Back" button, which is always at the top of the main menu or submenu.

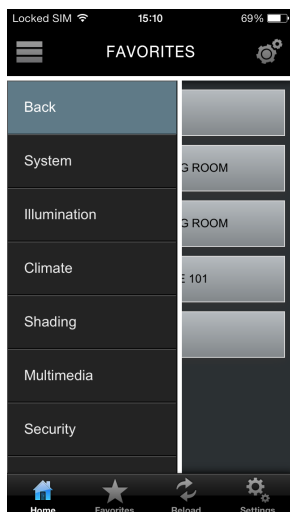

3.4 Web Server KNX functions

For more information about the capabilities of the Web Server KNX (part 01545) refer to the corresponding instruction manual.

3.5 Viewing RTSP video streams

Viewing RTSP video streams requires the installation of specific apps for viewing such video streams (e.g. VideoLAN VLC for iPhone).

After selecting the camera generating the RTSP video stream (from the video surveillance menu of the Web Server KNX) the current frame of the video stream with the PLAY symbol on top is shown.

Pressing PLAY opens the application for the visualization of the RTSP video streams.



VIMAR

Viale Vicenza, 14 - 36063 Marostica VI - Italy
Tel. +39 0424 488 600 - Fax (Italia) +39 0424 488 188 
Fax (Export) +39 0424 488 709
www.vimar.com



sw Vimar By-web KNX 9 1605
VIMAR - Marostica - Italy