


46910.43K.1

46910.43K.1
Monitor LED 43" ingressi 3/HDMI 4K

Installazione

1. Interfaccia posteriore

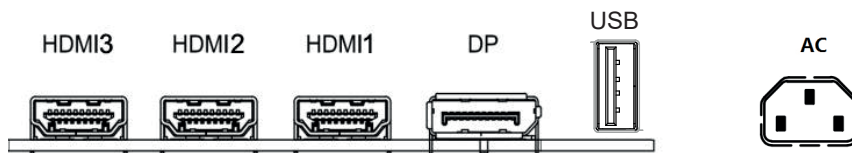


2. Descrizione dei connettori

AC	Alimentazione elettrica c.a. 100-240 V ~50/60 Hz
HDMI	Permette di collegare un dispositivo munito di uscita HDMI (High Definition Multimedia Interface)
DP	Per il collegamento di un dispositivo di uscita video con DP. Computer / Notebook.
USB	Per aggiornamento Software.

3. Comandi e funzioni

3.1 Tasti sulla parte posteriore destra del pannello

Per impostare molte delle funzioni del monitor e regolare il volume audio utilizzare i tasti o il telecomando.



46910.43K.1
43" LED monitor - 3/HDMI 4K inputs

Installation

1. Rear Interface

2. Explanation of connectors

AC	power supply AC 100-240 V ~50/60 Hz
HDMI	Lets you connect a device, with an HDMI output (High Definition Multimedia Interface)
DP	Connect a video output device with DP. Computer / Notebook.
USB	For software update.

3. Controls & Functions

3.1 Buttons on the rear-right part of the panel

To set many of the monitor's functions and adjust the audio volume, use the buttons or the remote control.



46910.43K.1

4. Configurazione OSD

4. OSD Setup

1. Configurazione OSD in modalità di ingresso VGA/DP1/2/HDMI1/2/DVI-D

1.OSD setup under VGA/DP1/2/HDMI1/2/DVI-D input mode

Descrizione	Immagine/Picture	Description																																	
<p>Sorgente segnale il monitor visualizzerà automaticamente il canale collegato</p>	<table border="1"> <thead> <tr> <th colspan="2">HDMI2</th> <th>Resolution:3840x2160@30Hz</th> </tr> </thead> <tbody> <tr> <td>Input Source</td> <td>DP</td> <td></td> </tr> <tr> <td>Brightness/Contrast</td> <td>HDMI1[2.0]</td> <td></td> </tr> <tr> <td>Color Setting</td> <td>● HDMI2[1.4]</td> <td></td> </tr> <tr> <td>Picture Quality Setting</td> <td>HDMI3[1.4]</td> <td></td> </tr> <tr> <td>Display</td> <td></td> <td></td> </tr> <tr> <td>Audio</td> <td></td> <td></td> </tr> <tr> <td>OSD</td> <td></td> <td></td> </tr> <tr> <td>Other</td> <td></td> <td></td> </tr> <tr> <td>Window1:</td> <td>InputSource: HDMI2 Resolution: 3840x2160@30Hz</td> <td>Window2: InputSource: Resolution:</td> </tr> <tr> <td>Window3:</td> <td>InputSource: Resolution:</td> <td>Window4: InputSource: Resolution:</td> </tr> </tbody> </table>	HDMI2		Resolution:3840x2160@30Hz	Input Source	DP		Brightness/Contrast	HDMI1[2.0]		Color Setting	● HDMI2[1.4]		Picture Quality Setting	HDMI3[1.4]		Display			Audio			OSD			Other			Window1:	InputSource: HDMI2 Resolution: 3840x2160@30Hz	Window2: InputSource: Resolution:	Window3:	InputSource: Resolution:	Window4: InputSource: Resolution:	<p>Input Source: The monitor will automatically Display the channel that with signal feed in.</p>
HDMI2		Resolution:3840x2160@30Hz																																	
Input Source	DP																																		
Brightness/Contrast	HDMI1[2.0]																																		
Color Setting	● HDMI2[1.4]																																		
Picture Quality Setting	HDMI3[1.4]																																		
Display																																			
Audio																																			
OSD																																			
Other																																			
Window1:	InputSource: HDMI2 Resolution: 3840x2160@30Hz	Window2: InputSource: Resolution:																																	
Window3:	InputSource: Resolution:	Window4: InputSource: Resolution:																																	
<p>Luminosità/Contrasto Luminosità:luminosità immagine(0-100) Contrasto:contrasto immagine(0-100) DCR: rapporto dinamico del contrasto(ON/OFF)</p>	<table border="1"> <thead> <tr> <th colspan="2">HDMI2</th> <th>Resolution:3840x2160@30Hz</th> </tr> </thead> <tbody> <tr> <td>Input Source</td> <td>Brightness</td> <td>80</td> </tr> <tr> <td>Brightness/Contrast</td> <td>Contrast</td> <td>50</td> </tr> <tr> <td>Color Setting</td> <td>DCR</td> <td>Off</td> </tr> <tr> <td>Picture Quality Setting</td> <td></td> <td></td> </tr> <tr> <td>Display</td> <td></td> <td></td> </tr> <tr> <td>Audio</td> <td></td> <td></td> </tr> <tr> <td>OSD</td> <td></td> <td></td> </tr> <tr> <td>Other</td> <td></td> <td></td> </tr> <tr> <td>Window1:</td> <td>InputSource: HDMI2 Resolution: 3840x2160@30Hz</td> <td>Window2: InputSource: Resolution:</td> </tr> <tr> <td>Window3:</td> <td>InputSource: Resolution:</td> <td>Window4: InputSource: Resolution:</td> </tr> </tbody> </table>	HDMI2		Resolution:3840x2160@30Hz	Input Source	Brightness	80	Brightness/Contrast	Contrast	50	Color Setting	DCR	Off	Picture Quality Setting			Display			Audio			OSD			Other			Window1:	InputSource: HDMI2 Resolution: 3840x2160@30Hz	Window2: InputSource: Resolution:	Window3:	InputSource: Resolution:	Window4: InputSource: Resolution:	<p>Brightness/Contrast: Brightness: Set the image brightness (0-100) Contrast: Set the image Contrast (0-100) DCR: Set the dynamic contrast ratio (on / off)</p>
HDMI2		Resolution:3840x2160@30Hz																																	
Input Source	Brightness	80																																	
Brightness/Contrast	Contrast	50																																	
Color Setting	DCR	Off																																	
Picture Quality Setting																																			
Display																																			
Audio																																			
OSD																																			
Other																																			
Window1:	InputSource: HDMI2 Resolution: 3840x2160@30Hz	Window2: InputSource: Resolution:																																	
Window3:	InputSource: Resolution:	Window4: InputSource: Resolution:																																	
<p>Settaggio Colore Gamma: gamma immagine(1.8, 2.0, 2.2, 2.4, 2.6) Modalità immag: selezionare la modalità (Standard,Foto,Cinema,gioco) Temperatura colore: selezionare la temperatura colore (Normale,Calda,Fredda,Utente) Hue:selezionare hue immagine(0-100) Saturazione:selezionare la saturazione immagine (0-100) vedi pag 10 manuale originale Riduzione Luce Blu:selezionare i valori (0-100)</p>	<table border="1"> <thead> <tr> <th colspan="2">HDMI2</th> <th>Resolution:3840x2160@30Hz</th> </tr> </thead> <tbody> <tr> <td>Input Source</td> <td>Gamma</td> <td>2.2</td> </tr> <tr> <td>Brightness/Contrast</td> <td>Picture Mode</td> <td>Standard</td> </tr> <tr> <td>Color Setting</td> <td>Color Temperature</td> <td>Warm</td> </tr> <tr> <td>Picture Quality Setting</td> <td>Hue</td> <td>50</td> </tr> <tr> <td>Display</td> <td>Saturation</td> <td>50</td> </tr> <tr> <td>Audio</td> <td>Low Blue Light</td> <td>0</td> </tr> <tr> <td>OSD</td> <td></td> <td></td> </tr> <tr> <td>Other</td> <td></td> <td></td> </tr> <tr> <td>Window1:</td> <td>InputSource: HDMI2 Resolution: 3840x2160@30Hz</td> <td>Window2: InputSource: Resolution:</td> </tr> <tr> <td>Window3:</td> <td>InputSource: Resolution:</td> <td>Window4: InputSource: Resolution:</td> </tr> </tbody> </table>	HDMI2		Resolution:3840x2160@30Hz	Input Source	Gamma	2.2	Brightness/Contrast	Picture Mode	Standard	Color Setting	Color Temperature	Warm	Picture Quality Setting	Hue	50	Display	Saturation	50	Audio	Low Blue Light	0	OSD			Other			Window1:	InputSource: HDMI2 Resolution: 3840x2160@30Hz	Window2: InputSource: Resolution:	Window3:	InputSource: Resolution:	Window4: InputSource: Resolution:	<p>Color Set: Gamma: Set the image gamma (1.8, 2.0, 2.2, 2.4, 2.6) Picture Mode: Set the image mode (Standard, photo, movie, game) Color Temperature: Set the color temperature (Normal, warm, cool, user) Hue: Set the image hue (0-100) Saturation: Set the image Saturation(0-100) Low Blue Light: Set the low blue light(0-100)</p>
HDMI2		Resolution:3840x2160@30Hz																																	
Input Source	Gamma	2.2																																	
Brightness/Contrast	Picture Mode	Standard																																	
Color Setting	Color Temperature	Warm																																	
Picture Quality Setting	Hue	50																																	
Display	Saturation	50																																	
Audio	Low Blue Light	0																																	
OSD																																			
Other																																			
Window1:	InputSource: HDMI2 Resolution: 3840x2160@30Hz	Window2: InputSource: Resolution:																																	
Window3:	InputSource: Resolution:	Window4: InputSource: Resolution:																																	
<p>Settaggio qualità immagine Nitidezza:settare il dettaglio immagine(0-10) Tempo risposta: Off,Alto,Medio,Basso Riduzione Rumore: Off,Alto,Medio,Basso Super Risoluzione: Off,Alta,Media,Bassa</p>	<table border="1"> <thead> <tr> <th colspan="2">HDMI2</th> <th>Resolution:3840x2160@30Hz</th> </tr> </thead> <tbody> <tr> <td>Input Source</td> <td>Sharpness</td> <td>50</td> </tr> <tr> <td>Brightness/Contrast</td> <td>Response Time</td> <td>Off</td> </tr> <tr> <td>Color Setting</td> <td>Noise Reduction</td> <td>Off</td> </tr> <tr> <td>Picture Quality Setting</td> <td>Super Reduction</td> <td>Off</td> </tr> <tr> <td>Display</td> <td>Dynamic Luminous Contro</td> <td>Off</td> </tr> <tr> <td>Audio</td> <td></td> <td></td> </tr> <tr> <td>OSD</td> <td></td> <td></td> </tr> <tr> <td>Other</td> <td></td> <td></td> </tr> <tr> <td>Window1:</td> <td>InputSource: HDMI2 Resolution: 3840x2160@30Hz</td> <td>Window2: InputSource: Resolution:</td> </tr> <tr> <td>Window3:</td> <td>InputSource: Resolution:</td> <td>Window4: InputSource: Resolution:</td> </tr> </tbody> </table>	HDMI2		Resolution:3840x2160@30Hz	Input Source	Sharpness	50	Brightness/Contrast	Response Time	Off	Color Setting	Noise Reduction	Off	Picture Quality Setting	Super Reduction	Off	Display	Dynamic Luminous Contro	Off	Audio			OSD			Other			Window1:	InputSource: HDMI2 Resolution: 3840x2160@30Hz	Window2: InputSource: Resolution:	Window3:	InputSource: Resolution:	Window4: InputSource: Resolution:	<p>Picture Quality Set: Sharpness: Set the picture sharpness (0-100) Response Time: Set the picture response time (off, high, middle, low) Noise Reduction: Set the picture noise reduction (off, high, middle, low) Super Resolution: Set the picture super resolution (off, high, middle, low) Dynamic Luminous Control: Set the picture dynamic luminous (on / off)</p>
HDMI2		Resolution:3840x2160@30Hz																																	
Input Source	Sharpness	50																																	
Brightness/Contrast	Response Time	Off																																	
Color Setting	Noise Reduction	Off																																	
Picture Quality Setting	Super Reduction	Off																																	
Display	Dynamic Luminous Contro	Off																																	
Audio																																			
OSD																																			
Other																																			
Window1:	InputSource: HDMI2 Resolution: 3840x2160@30Hz	Window2: InputSource: Resolution:																																	
Window3:	InputSource: Resolution:	Window4: InputSource: Resolution:																																	

46910.43K.1

Descrizione	Immagine/Picture	Description																																				
<p>Display Proporzioni immagine: Ampio schermo 4:3, 1:1, Auto</p>	<table border="1"> <thead> <tr> <th colspan="2">HDMI2</th> <th>Resolution:3840x2160@30Hz</th> </tr> </thead> <tbody> <tr> <td>Input Source</td> <td>Aspect Ratio</td> <td>Wide Screen</td> </tr> <tr> <td>Brightness/Contrast</td> <td></td> <td></td> </tr> <tr> <td>Color Setting</td> <td></td> <td></td> </tr> <tr> <td>Picture Quality Setting</td> <td></td> <td></td> </tr> <tr> <td>Display</td> <td></td> <td></td> </tr> <tr> <td>Audio</td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td>OSD</td> <td></td> <td></td> </tr> <tr> <td>Other</td> <td></td> <td></td> </tr> <tr> <td></td> <td>Window1: InputSource: HDMI2 Resolution: 3840x2160@30Hz</td> <td>Window2: InputSource: Resolution:</td> </tr> <tr> <td></td> <td>Window3: InputSource: Resolution:</td> <td>Window4: InputSource: Resolution:</td> </tr> </tbody> </table>	HDMI2		Resolution:3840x2160@30Hz	Input Source	Aspect Ratio	Wide Screen	Brightness/Contrast			Color Setting			Picture Quality Setting			Display			Audio						OSD			Other				Window1: InputSource: HDMI2 Resolution: 3840x2160@30Hz	Window2: InputSource: Resolution:		Window3: InputSource: Resolution:	Window4: InputSource: Resolution:	<p>Display: Aspect Ratio: Screen aspect ratio Set (wide screen, 4:3, 1:1, auto)</p>
HDMI2		Resolution:3840x2160@30Hz																																				
Input Source	Aspect Ratio	Wide Screen																																				
Brightness/Contrast																																						
Color Setting																																						
Picture Quality Setting																																						
Display																																						
Audio																																						
OSD																																						
Other																																						
	Window1: InputSource: HDMI2 Resolution: 3840x2160@30Hz	Window2: InputSource: Resolution:																																				
	Window3: InputSource: Resolution:	Window4: InputSource: Resolution:																																				
<p>Audio Silenzioso: disattiva l'audio all'uscita auricolare Volume: regolazione volume audio uscita auricolare</p>	<table border="1"> <thead> <tr> <th colspan="2">HDMI2</th> <th>Resolution:3840x2160@30Hz</th> </tr> </thead> <tbody> <tr> <td>Input Source</td> <td>Mute</td> <td>Off</td> </tr> <tr> <td>Brightness/Contrast</td> <td>Volume</td> <td>50</td> </tr> <tr> <td>Color Setting</td> <td></td> <td></td> </tr> <tr> <td>Picture Quality Setting</td> <td></td> <td></td> </tr> <tr> <td>Display</td> <td></td> <td></td> </tr> <tr> <td>Audio</td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td>OSD</td> <td></td> <td></td> </tr> <tr> <td>Other</td> <td></td> <td></td> </tr> <tr> <td></td> <td>Window1: InputSource: HDMI2 Resolution: 3840x2160@30Hz</td> <td>Window2: InputSource: Resolution:</td> </tr> <tr> <td></td> <td>Window3: InputSource: Resolution:</td> <td>Window4: InputSource: Resolution:</td> </tr> </tbody> </table>	HDMI2		Resolution:3840x2160@30Hz	Input Source	Mute	Off	Brightness/Contrast	Volume	50	Color Setting			Picture Quality Setting			Display			Audio						OSD			Other				Window1: InputSource: HDMI2 Resolution: 3840x2160@30Hz	Window2: InputSource: Resolution:		Window3: InputSource: Resolution:	Window4: InputSource: Resolution:	<p>Audio: Mute: Mute the audio output to the earphone (on/off) Volume: Set the audio output volume to the earphone (0-100)</p>
HDMI2		Resolution:3840x2160@30Hz																																				
Input Source	Mute	Off																																				
Brightness/Contrast	Volume	50																																				
Color Setting																																						
Picture Quality Setting																																						
Display																																						
Audio																																						
OSD																																						
Other																																						
	Window1: InputSource: HDMI2 Resolution: 3840x2160@30Hz	Window2: InputSource: Resolution:																																				
	Window3: InputSource: Resolution:	Window4: InputSource: Resolution:																																				
<p>OSD Lingua:selezione lingua OSD (Inglese,Cinese, Coreano,Russo;Spagnolo,Giapponese Francese OSD posizione-H:posizione orizzontale OSD (0-100) OSD posizione-V:posizione verticale OSD (0-100) OSD trasparenza: regolazione trasparenza OSD (0-100) OSD permanenza: regolazione tempo visione OS (0-100) OSD rotazione:regolazione rotazione (Normale, 90,180,270)</p>	<table border="1"> <thead> <tr> <th colspan="2">HDMI2</th> <th>Resolution:3840x2160@30Hz</th> </tr> </thead> <tbody> <tr> <td>Input Source</td> <td>Language</td> <td>English</td> </tr> <tr> <td>Brightness/Contrast</td> <td>OSD H-Position</td> <td>50</td> </tr> <tr> <td>Color Setting</td> <td>OSD V-Position</td> <td>50</td> </tr> <tr> <td>Picture Quality Setting</td> <td>OSD Transparency</td> <td>20</td> </tr> <tr> <td>Display</td> <td>OSD Time Out</td> <td>20</td> </tr> <tr> <td>Audio</td> <td>OSD Rotation</td> <td>Normal</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td>OSD</td> <td></td> <td></td> </tr> <tr> <td>Other</td> <td></td> <td></td> </tr> <tr> <td></td> <td>Window1: InputSource: HDMI2 Resolution: 3840x2160@30Hz</td> <td>Window2: InputSource: Resolution:</td> </tr> <tr> <td></td> <td>Window3: InputSource: Resolution:</td> <td>Window4: InputSource: Resolution:</td> </tr> </tbody> </table>	HDMI2		Resolution:3840x2160@30Hz	Input Source	Language	English	Brightness/Contrast	OSD H-Position	50	Color Setting	OSD V-Position	50	Picture Quality Setting	OSD Transparency	20	Display	OSD Time Out	20	Audio	OSD Rotation	Normal				OSD			Other				Window1: InputSource: HDMI2 Resolution: 3840x2160@30Hz	Window2: InputSource: Resolution:		Window3: InputSource: Resolution:	Window4: InputSource: Resolution:	<p>OSD: Language: OSD language selection (English, Chinese, Korean, Russian, Spanish, Japanese, French) OSD H-Position: Change OSD horizontal position adjustment (0-100) OSD V-Position: Change OSD vertical position adjustment (0-100) OSD Transparency: OSD transparency adjustment (0-100) OSD Time Out: OSD display dwell time selection (0-100 seconds) OSD Rotation: OSD rotation adjustment (Normal, 90, 180, 270)</p>
HDMI2		Resolution:3840x2160@30Hz																																				
Input Source	Language	English																																				
Brightness/Contrast	OSD H-Position	50																																				
Color Setting	OSD V-Position	50																																				
Picture Quality Setting	OSD Transparency	20																																				
Display	OSD Time Out	20																																				
Audio	OSD Rotation	Normal																																				
OSD																																						
Other																																						
	Window1: InputSource: HDMI2 Resolution: 3840x2160@30Hz	Window2: InputSource: Resolution:																																				
	Window3: InputSource: Resolution:	Window4: InputSource: Resolution:																																				
<p>Altro Reset: ripristino monitor alle condizioni di fabbrica</p>	<table border="1"> <thead> <tr> <th colspan="2">HDMI2</th> <th>Resolution:3840x2160@30Hz</th> </tr> </thead> <tbody> <tr> <td>Input Source</td> <td>Reset</td> <td></td> </tr> <tr> <td>Brightness/Contrast</td> <td></td> <td></td> </tr> <tr> <td>Color Setting</td> <td></td> <td></td> </tr> <tr> <td>Picture Quality Setting</td> <td></td> <td></td> </tr> <tr> <td>Display</td> <td></td> <td></td> </tr> <tr> <td>Audio</td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td>OSD</td> <td></td> <td></td> </tr> <tr> <td>Other</td> <td></td> <td></td> </tr> <tr> <td></td> <td>Window1: InputSource: HDMI2 Resolution: 3840x2160@30Hz</td> <td>Window2: InputSource: Resolution:</td> </tr> <tr> <td></td> <td>Window3: InputSource: Resolution:</td> <td>Window4: InputSource: Resolution:</td> </tr> </tbody> </table>	HDMI2		Resolution:3840x2160@30Hz	Input Source	Reset		Brightness/Contrast			Color Setting			Picture Quality Setting			Display			Audio						OSD			Other				Window1: InputSource: HDMI2 Resolution: 3840x2160@30Hz	Window2: InputSource: Resolution:		Window3: InputSource: Resolution:	Window4: InputSource: Resolution:	<p>Other: Reset: Reset the monitor to default factory setting.</p>
HDMI2		Resolution:3840x2160@30Hz																																				
Input Source	Reset																																					
Brightness/Contrast																																						
Color Setting																																						
Picture Quality Setting																																						
Display																																						
Audio																																						
OSD																																						
Other																																						
	Window1: InputSource: HDMI2 Resolution: 3840x2160@30Hz	Window2: InputSource: Resolution:																																				
	Window3: InputSource: Resolution:	Window4: InputSource: Resolution:																																				

46910.43K.1

5. Caratteristiche tecniche del display / Display Specification

Modello / Model	46910.43K.1
Tipo di pannello / Panel Type	43" (16:9) Monitor retroilluminato a LED / LED Backlight Monitor
Tipo di case / Case Type	Plastico
Massima risoluzione / Best Resolution	3840 (H) x 2160 (V)
Colori / Colors	1.073 G
Dimensioni pixel / Pixel Pitch	0,24 (H) x 0,24 (V) mm
Rapporto di contrasto / Contrast Ratio	1000:1
Luminosità / Brightness	350 Cd/m ²
Tempo di risposta / Response Time	5 ms
Angolo di visione / Viewing Angle	178 / 178
Compatibilità video / Video Compatibility	Multi-Standard for NTSC / PAL - Multi-Standard for NTSC / PAL
Formato immagine / Aspect Ratio	16 : 9
Temperatura di esercizio / Work Temperature	0 to 40 °C
Interfaccia video / Video Interface	3 x HDMI v2.0, 1 x USB, 1 x DP
Interfaccia audio / Audio Interface	Speaker 2 x 3W
Interfaccia alimentazione elettrica / Power Interface	AC In
Certificazione / Certification	Energy Star/CE/FCC/ROHS - Energy Star / CE / FCC / ROHS
Tipo supporto / Stand Type	Tavolo/Desktop/VESA
Colore / Colour	Nero / Black
Posizione tasti / Button Position	Lato posteriore / Rear
Dimensioni / Dimensions (mm) LxAxP	962 x 551 x 92
Dim. (mm) LxAxP + Staffa/Bracket	962 x 643 x 190
Peso / Weight	6,5 kg
Tensione / Voltage	100-240 Vac
Potenza assorbita / Power Consumption	40 W

ATTENZIONE

- Leggere attentamente questo manuale dell'utente per accertarsi di poter utilizzare il dispositivo correttamente e in modo sicuro.
- Il manuale potrebbe contenere indicazioni tecniche non corrette ed errori di stampa. Gli aggiornamenti verranno aggiunti alla nuova versione del manuale. Il contenuto del manuale è soggetto a modifica senza preavviso.
- Utilizzare il dispositivo esclusivamente con il tipo alimentatore indicato sulla targhetta. Prima dell'uso verificare la tensione dell'alimentazione. Se il dispositivo non deve essere utilizzato per un lungo periodo di tempo, scollegare la spina dalla presa.
- Non installare il dispositivo vicino a fonti di calore, quali radiatori, bocchette di aria calda, stufe o altri dispositivi che producono calore.
- Non installare il dispositivo vicino all'acqua. Pulire esclusivamente con un panno asciutto.
- Collocare il dispositivo in un'area ben ventilata.
- Questo dispositivo è un'apparecchiatura per utilizzo in ambienti chiusi. Non esporre l'apparecchiatura a pioggia o ambienti umidi. Nel caso in cui materiali solidi o liquidi penetrino all'interno dell'apparecchiatura, disconnettere immediatamente l'alimentazione e rivolgersi a un tecnico qualificato per far controllare il dispositivo prima di riavviarlo.
- Non tentare di riparare il dispositivo senza l'ausilio o l'approvazione di un tecnico.

CAUTION

- Please read this user manual carefully to ensure that you can use the device correctly and safely.
- There may be several technically incorrect places or printing errors in this manual. The updates will be added into the new version of this manual. The contents of this manual are subject to change without notice.
- This device should be operated only from the type of power source indicated on the marking label. The voltage of the power must be verified before using. If the device doesn't work for a long time, pull out the plug from the socket.
- Do not install this device near any heat sources such as radiators, heat registers, stoves or other device that produce heat.
- Do not install this device near water. Clean only with a dry cloth.
- Place the device in a well-ventilated area.
- This machine is indoor using equipment. Do not expose the machine in rain or moist environment. In case any solid or liquid get into the machine's case, please cut off the power supply immediately, and ask for qualified technicians to check the machine before restart
- Do not try to repair the device by yourself without technical aid or approval.

Questo prodotto è destinato esclusivamente all'utilizzo in impianti di videosorveglianza TV a circuito chiuso. Vimar SpA non risponde per la manomissione del prodotto e per l'uso diverso da quello previsto.

This product is intended for use solely in CCTV video surveillance systems. Vimar SpA is not responsible for any tampering with the product or for any use other than the intended use.



Regole di installazione

L'installazione deve essere effettuata da personale qualificato con l'osservanza delle disposizioni regolanti l'installazione del materiale elettrico in vigore nel paese dove i prodotti sono installati.



Installation rules

Installation should be carried out by qualified staff in compliance with the current regulations regarding the installation of electrical equipment in the country where the products are installed.

Conformità normativa

Direttiva EMC. Direttiva RoHS.
Norme EN 55032, EN 55035, EN IEC 63000.
Regolamento REACh (UE) n. 1907/2006 – art.33. Il prodotto potrebbe contenere tracce di piombo.

Conformity to Standards

EMC Directive. RoHS Directive.
Standards EN 55032, EN 55035, EN IEC 63000.
REACH (EU) Regulation no. 1907/2006 – Art.33. The product may contain traces of lead.



RAEE - Informazioni agli utilizzatori

Il simbolo del cassonetto barrato riportato sull'apparecchiatura o sulla sua confezione indica che il prodotto alla fine della propria vita utile deve essere raccolto separatamente dagli altri rifiuti. L'utente dovrà, pertanto, conferire l'apparecchiatura giunta a fine vita agli idonei centri comunali di raccolta differenziata dei rifiuti elettrotecnici ed elettronici.

In alternativa alla gestione autonoma, è possibile consegnare gratuitamente l'apparecchiatura che si desidera smaltire al distributore, al momento dell'acquisto di una nuova apparecchiatura di tipo equivalente. Presso i distributori di prodotti elettronici con superficie di vendita di almeno 400 m² è inoltre possibile consegnare gratuitamente, senza obbligo di acquisto, i prodotti elettronici da smaltire con dimensioni inferiori a 25 cm. L'adeguata raccolta differenziata per l'avvio successivo dell'apparecchiatura dismessa al riciclaggio, al trattamento e allo smaltimento ambientalmente compatibile contribuisce ad evitare possibili effetti negativi sull'ambiente e sulla salute e favorisce il reimpiego e/o il ciclo dei materiali di cui è composta l'apparecchiatura.



WEEE - User information

If the crossed-out bin symbol appears on the equipment or packaging, this means the product must not be included with other general waste at the end of its working life. The user must take the worn product to a sorted waste center, or return it to the retailer when purchasing a new one. Products for disposal can be consigned free of charge (without any new purchase obligation) to retailers with a sales area of at least 400 m², if they measure less than 25 cm. An efficient sorted waste collection for the environmentally friendly disposal of the used device, or its subsequent recycling, helps avoid the potential negative effects on the environment and people's health, and encourages the re-use and/or recycling of the construction materials.