



## ARKÉ: SET/RESET device Metal

### 19183.M

Wiring devices / Traditional wiring devices / ARKÉ / Devices

#### SET/RESET device Metal





SET/RESET push button for emergency call system, visible in darkness, 2 NO 5 A 250 V~ relay outputs for acoustic and optical signalling, supply voltage 12 V~ 50-60 Hz or 12-24 V d.c. (SELV), Metal - 2 modules. SET with built-in or from peripheral NC push buttons connected in series. RESET with peripheral NC push buttons connected in series

3 - Active

1 NR

- [Multilanguage instructions sheet \(725 kb\)](#)

- [Arké lives in your time](#)

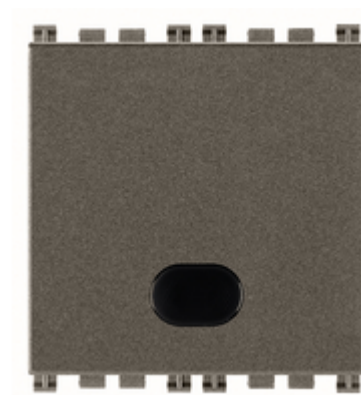

3D

- **Class group:** Domestic switching devices
- **Class:** Electronic insert for domestic switching devices
- **Model:** Other
- **Assembly arrangement:** Modular device for domestic switching devices
- **Number of modules (module system):** 2
- **Radio-controlled:** No
- **Mounting method:** Flush-mounted
- **Type of fastening:** Engage (snap)

- **Material:** Plastic
- **Material quality:** Thermoplastic
- **Surface protection:** Lacquered
- **Surface finishing:** Matt
- **Colour:** Aluminium
- **RAL-number (similar):** 9007
- **Transparent:** No

- 00. CE Marking - EU
- 37. Marking - Morocco
- 43. UKCA mark - Great Britain
- 96. Electrotechnical expert ([download](#))
- 99. WEEE Directive ([download](#))



8007352600683  
1 NR  
11.2x9.6x9.8 [cm]  
130.6 [g]

Vimar