



## Shared components: KNX touch-thermostat 2M white

### 02952.B

Smart systems&products / KNX / Shared components / Devices

#### KNX touch-thermostat 2M white

Electronic touchscreen thermostat for ambient temperature control (heating and air-conditioning) of 2 independent zones, KNX standard home automation system, class I temperature control device (contribution 1%) in ON/OFF mode, class IV (contribution 2%) in PI mode, 1 NO relay output 4 A 24 V~, 1 input for wired temperature sensor or electronic temperature sensor, 1 programmable digital input, RGB LED backlighting, can be interfaced with actuator with KNX proportional analogue outputs to make a class V modulating room thermostat (contribution 3%), to be completed with Eikon, Arké or Plana cover plates, white - 2 modules



#### Product Status

2 - Will be discontinued

#### Minimum order quantity

1 NR


#### Sheets, Manuals, Documentation

- [Multilanguage instructions sheet \(946 kb\)](#)
- [Manuale installatore \(3401 kb\)](#)
- [Installer manual \(3149 kb\)](#)


#### Product Software

- [DB\\_Termostato\\_KNX\\_REL-01.18\\_20221104.zip](#)


## Drawings



Space view




Backside view



3D View

## Gallery

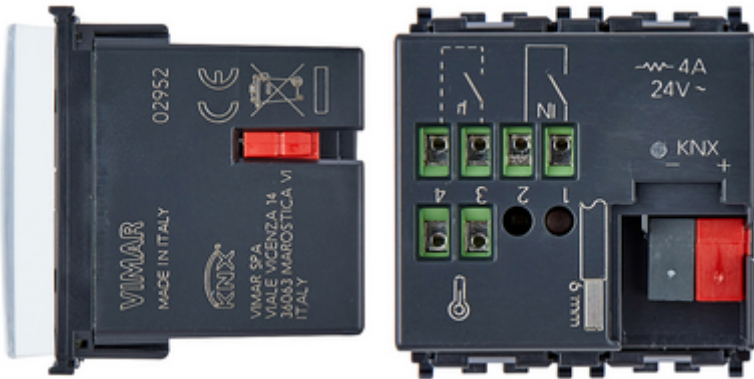


## Technical data

- **Class group:** Installation bus systems
- **Class:** Room temperature controller for bus system
- **Bus system KNX:** Yes
- **Bus system KNX-RF (Radio Frequent):** No
- **Bus system radio frequent:** No
- **Bus system LON:** No
- **Bus system Powernet:** No
- **Other bus systems:** None
- **Radio frequent bidirectional:** No
- **Assembly arrangement:** Basic element
- **Mounting method:** Flush-mounted
- **With local operation:** Yes
- **With anti-theft/dismantling protection:** No
- **With LED indication:** No
- **With display:** Yes
- **Material:** Plastic
- **Material quality:** Other
- **Surface protection:** Untreated
- **Surface finishing:** Glossy
- **Colour:** White
- **RAL-number (similar):** 9003
- **Transparent:** No
- **Manual set point setting:** Yes
- **Presence button:** No
- **Parallel-service possible:** No
- **Degree of protection (IP):** IP40
- **With bus connection:** Yes

## Certifications

- 00. CE Marking - EU
- 27. KNX
- 37. Marking - Morocco
- 43. UKCA mark - Great Britain
- 92. RoHS UAE
- 96. Electrotechnical expert ([download](#))
- 99. WEEE Directive ([download](#))

# Packaging



**Code** 8007352512658  
**Quantity** 1 NR  
**Dim.** 11.2x9.6x9.8 [cm]  
**Weight** 142.2 [g]

**Code** 8007352671201  
**Quantity** 18 NR  
**Dim.** 37.5x30x21 [cm]  
**Weight** 1,790 [g]

# Legal

Vimar reserves the right to change at any time and without notice the characteristics of the products reported. Installation should be carried out by qualified staff in compliance with the current regulations regarding the installation of electrical equipment in the country where the products are installed. For the terms of use of the information on the product info sheet see [Conditions of Use](#).