



Shared components: IoT dial thermostat 2M grey

02973

Wiring devices / View Wireless wiring devices / Shared components / Devices

IoT dial thermostat 2M grey

Dial thermostat with relay output 5(2) A 240 V~, IoT technology on Bluetooth technology 5.0 standard for the creation of View Wireless mesh system, 1 input for external temperature sensor, 100-240 V~ 50/60 Hz power supply, heating and air conditioning in ON/OFF and PID mode, class I temperature control device (contribution 1%) in ON/OFF mode, class IV (contribution 2%) in PID mode, white LED backlighting with brightness control, 100-240 V 50/60 Hz power supply, grey - 2 modules. To be completed with Eikon, Arké and Plana cover plates, for Idea with dedicated mounting frame 16723

- Compatible with Alexa, Google Home and IFTTT, using the dedicated gateway
- Configuration via "VIEW Wireless" App for Bluetooth technology system
- Hotkeys are designed for quick interaction






3 - Active


1 NR

- Light multilanguage instructions sheet (1051 kb)
- Foglio istruzioni multilingua Full (696 kb)
- Feuille d'instructions multilingues Full (700 kb)
- Hoja de instrucciones multilingüe Full (697 kb)
- Full multilanguage instructions sheet (692 kb)
- Πολυγλωσσικό φύλλο οδηγιών Full (860 kb)
- Mehrsprachig-Gebrauchsinformation Full (699 kb)
- Full (829 kb)
- Manuale app View Wireless (15556 kb)
- Manuel appli View Wireless (37703 kb)
- Manual app View Wireless (37528 kb)
- Manual View Wireless app (37579 kb)
- Εγχειρίδιο τεχνικού εγκατάστασης (37781 kb)
- Installationsanleitung View Wireless (37508 kb)

- App View Wireless - temperature control



3D

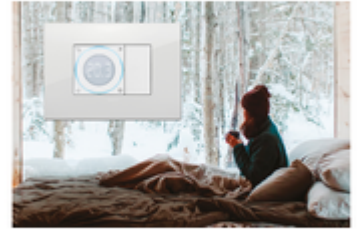

- **Class group:** Stats, switches and controllers
- **Class:** Room thermostat
- **Model:** On/Off
- **Type of power supply:** 230 V AC
- **Connection:** 3-/4-wire
- **With receiver:** No
- **External sensor:** Yes
- **Thermal feedback:** Parallel
- **Control characteristic:** PID
- **Suitable for heating:** Yes
- **Number of heater outputs:** 1
- **Number of cooler outputs:** 1
- **Adjustable differential:** Yes
- **Temperature readable:** Yes
- **With sound indicator:** No
- **Sensor/feeler type:** Resistance sensor

- **Mounting method:** Flush-mounted
- **Number of modules (module system):** 2
- **With display:** Yes
- **Operation:** Turn
- **With tap water circuit:** No
- **Max. contact voltage:** 230 V
- **Max. contact load:** 5 A
- **Degree of protection (IP):** IP30
- **Explosion-proof:** No
- **Colour:** Grey
- **RAL-number:** 7024
- **Height:** 49,00 mm
- **Width:** 44,80 mm
- **Depth:** 41,50 mm
- **Diameter:** 0 mm
- **Class of the temperature control:** IV

- 00. CE Marking - EU
- 29. QCERT - Colombia
- 37. Marking - Morocco
- 40. Bluetooth technology

- 43. UKCA mark - Great Britain
- 92. RoHS UAE
- 99. WEEE Directive ([download](#))



8 0 0 7 3 5 2 6 5 7 5 2 6

8007352657526
1 NR
5.7x5.3x7.7 [cm]
81.6 [g]



8 0 0 7 3 5 2 7 4 6 4 6 6

8007352746466
60 NR
37.5x30x13.5 [cm]
5,209.2 [g]



8 0 0 7 3 5 2 6 5 7 5 3 3

8007352657533
70 NR
39.5x30x17 [cm]
6,078 [g]

Vimar